
SPECIFICATION CONTROL DRAWING

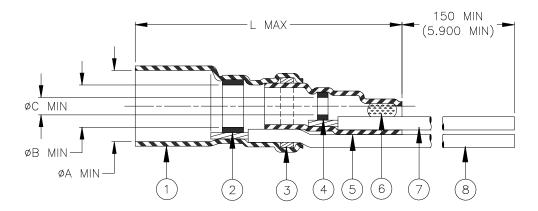

Product Name	Component Dimensions				"GA"	Cable Dimensions				
	L	øΑ	øΒ	øС	Wire Gauge	øD	øΕ	øF	G±0.5	M±0.5
Name	max	min	min	min	(AWG)			min	(G±0.02)	$(M\pm0.02)$
B-044-20-N-LF					20	1.70	1.30			
B-044-22-N-LF	28.0	3.40	2.30	0.8	22	(0.065)	(0.050)	0.30	16.0	6.0
B-044-24-N-LF	(1.100)	(0.135)	(0.090)	(0.030)	24	to 3.40	2.30	(0.012)	(0.630)	(0.235)
B-044-26-N-LF					26	(0.135)	(0.090)			

MATERIALS

- 1. & 5. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- 2. & 4. SOLDER PREFORMS WITH FLUX:

SOLDER: TYPE Bi58 per ANSI J-STD-006.

FLUX: TYPE ROL1 per ANSI J-STD-004.

- 3. & 6. MELTABLE RINGS: Thermally stabilized thermoplastic.
- 7. CONDUCTOR LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32. See table for AWG.ETFE insulated, stranded tin plated copper

Color: white.


8. GROUND LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32. See table for AWG.ETFE insulated, stranded tin plated copper.

Color: blue.

APPLICATION

- 1. The parts covered by this SCD are for use in terminating the primary conductor and the braided shield of a coaxial cable having tin or silver plated conductor and shield, rated for at least 125° C and meeting the dimensional requirements listed.
- 2. Install per Raychem RPIP-500-03.
- 3. Temperature range: -55° C to $+125^{\circ}$ C.

For best results, prepare the cable as shown:



300 Constitu			itution Dri	cs Corporation on Drive, A. 94025, U.S.A.			COAX SOLDERSLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] TOLERANCES: ANGLES: N/A Tyco Electronics reserves the right to amend							DOCUMENT NO.: B-044-GA-N-LF				
0.00 N/A 0.0 N/A 0 N/A	ROU	JGHNESS IN	this drawing at any time. Users should evaluate			REV.:	В	DATE: 01-DEC-2021			
DRAWN BY: MALLIKA.D)	CAGE CODE 06090	: REP	PLACES:	ECN NUMBER: ECN-21-128737	SCALE:	NTS	SIZE:	SHEET: 1 of 1		