

3

2

1


179610-1 : 本 ☒

179610-1 : AS SHOWN

NUMBER
C-179610



METRIC

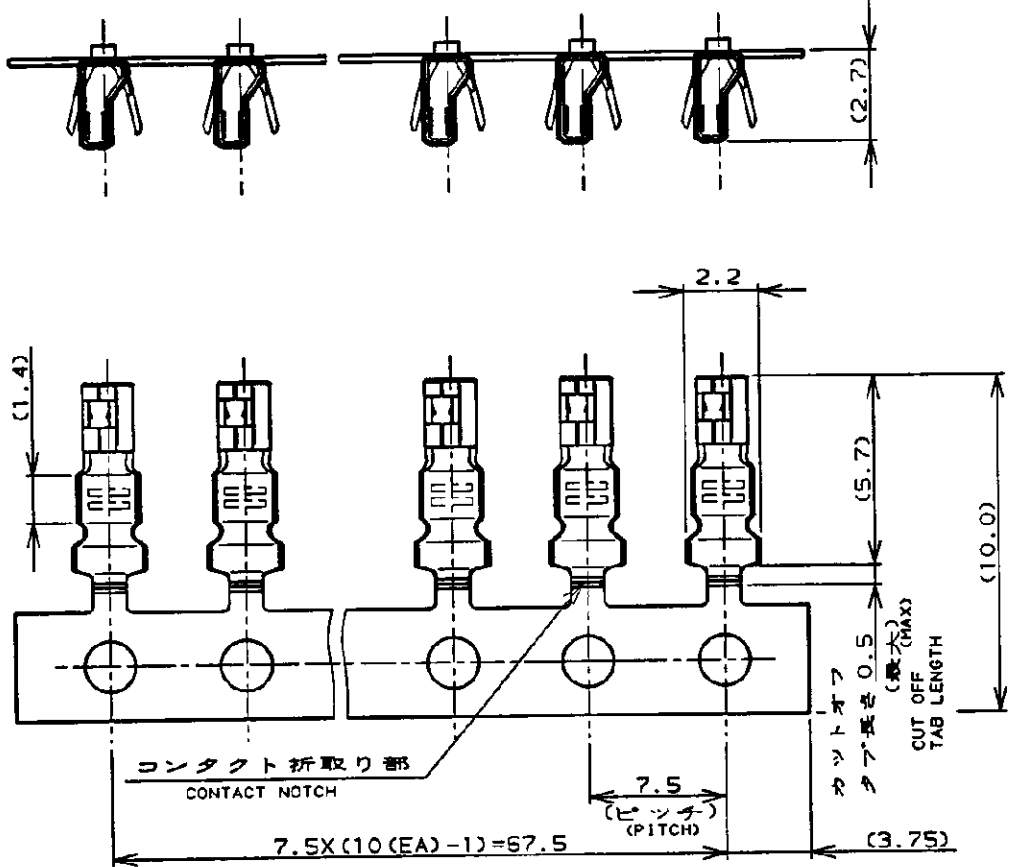

注,

- 1 材料 錫めっき済磷青銅(板厚0.2)
- 2 運用製品規格, 108-5408
- 3 取付運用規格, 114-5179
- 4 連続状端子型番, 179609-1 (折取り部なし)

NOTES,

- 1 MATERIAL PRE-TIN PHOS.BRO (THK 0.2)
- 2 PRODUCT SPEC. ; 108-5408
- 3 APPLICATION SPEC. ; 114-5179
- 4 STRIP TERMINAL , 179609-1 (W/O NOTCH)

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

Copyright © 19__
AMP (Japan) .LTD.
ALL RIGHTS RESERVED.

AMP
AMP (JAPAN), LTD.
Tokyo, Japan

GENERAL TOLERANCE		WIRE RANGE	INSULATION DIA.
0mm ≤ 10 : ±0.2	10mm ≤ 30 : ±0.25	0.05	0.65-1.35mm
30mm ≤ 100 : ±0.3		-0.12 mm ² (AWG 30-25)	
ANGLES : ±3°	MATERIAL	SEE NOTE 1	FINISH
	注 1 参照		注 1 参照

SCALE	SIZE	LOC	NUMBER	REV.	SHEET
—#	A	J	C-179610	0	1 OF 1
NAME CRIMP TYPE II REC. CONTACT (L/P) 圧着タイプIIリセコンタクト (レコラ状) (AMP CTコネクタ 2mmピッチ) (AMP CT CONN.2mm PITCH)					
DR. T. S. Kato 1/23/96	DE. T. S. Kato 1/23/96				
CHK. S. Kato 1/23/96	APP. S. Kato 1/23/96				

AMP-J
REV. 10/83

CUSTOMER DRAWING