


| HARTING P/N    | Type of cable | Cable length(mm)                    |
|----------------|---------------|-------------------------------------|
| 21373500C70050 | PUR           | 5000 <sup>+200</sup> <sub>-0</sub>  |
| 21373500C70100 | PUR           | 10000 <sup>+400</sup> <sub>-0</sub> |

| SPECIFICATIONS                    |                   |
|-----------------------------------|-------------------|
| CONTACT CARRIER MATERIAL/COLOR    | PBT/WHITE         |
| MOLDED HEAD MATERIAL/COLOR        | TPU/BLACK         |
| CONTACT MATERIAL/COLOR            | BRASS/SILVER      |
| COUPLING NUT MATERIAL/PLATING     | ZINC ALLOY/NICKEL |
| RATED CURRENT                     | 6 A               |
| RATED VOLTAGE                     | 300 V             |
| OUTER CABLR JACKET MATERIAL/COLOR | PUR/BLACK         |
| CONDUCTOR INSULATION MATERIAL     | PVC               |
| NUMBER OF CONDUCTORS (AWG)        | 12X18AWG          |
| OPERATING TEMPERATURE             | -40°C — +80°C     |
| PROTECTION CLASS                  | IEC IP67          |

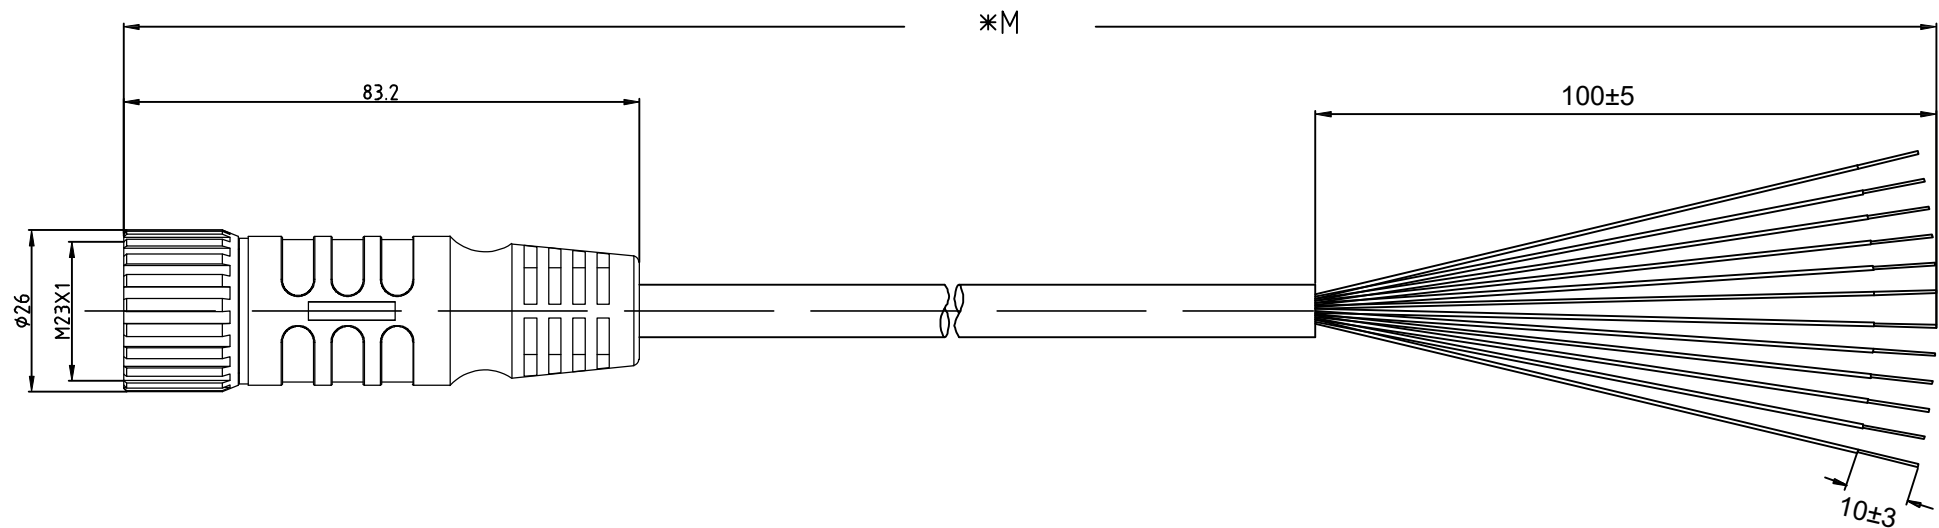

|   |  |  |                       |                               |                        |                        |                        |
|---|--|--|-----------------------|-------------------------------|------------------------|------------------------|------------------------|
|   | All rights reserved<br>Department HCS - CN | Created by<br>LINI                               | Inspected by<br>LIANL | Standardisation<br>LIANL      | Date<br>2022-10-13     | State<br>Final release | Doc-Key / ECM-Nr.<br>/ |
| HARTING Customised Solutions<br>D-32339 Espelkamp |  | Title<br>M23_12P FE,Int-thread,STR PUR cable,xxM | Type<br>TB            | Number<br>2137 35 00 C 70 XXX | Rev. <b>A</b> Page 1/1 |                        |                        |

| Rev. | Description  | Appr.   | Date     |
|------|--------------|---------|----------|
| A    | First issue. | Ivy Lin | 10/13/22 |