

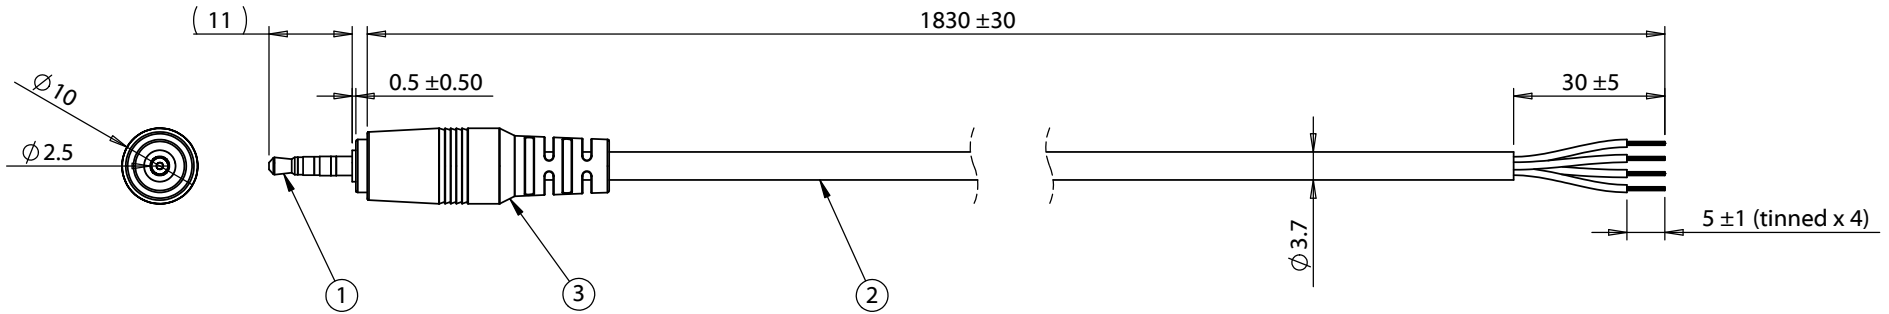


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00007	Connector, 2.5xL20.2 mm, 4C audio plug, brass nickel plated	1	
2	30-00413	Wire, 4C TC, 26 AWG, 30V, 80C, 3.7 mm, shielded, PVC, 89A	1	
3	24-00075	Overmold, PVC, black	1	



Wiring Diagram	
50-00007	wire color
A	Red
B	Black
C	Yellow
D	Green

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/19/2009	Re-issue CUI to Tensility template	<b>GL</b> <small>Digitally signed by GL Date: 2017.02.10 16:18:56 -08'00'</small>	RoHS compliant	
A1	5/11/2009	Added connector part number	<b>PS</b> <small>Digitally signed by PS Date: 2017.02.13 14:35:18 -08'00'</small>	Function test: no open, no short circuit, no intermittent	
A2	8/30/2011	Updated description and connector information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	
A3	2/23/2016	Corrected barrel length dimensions		Cable, 1830 mm, 4C 2.5mm 50-00007 plug to stripped tinned, 26 AWG, 30-00413	
A4	2/10/2017	Updated notes			Part number:
				Scale: 1:2	
					Sheet 1 of 1