



LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				REVISED & REDRAWN PER 0720-0303-93	7-28-93	BB

REVISIONS

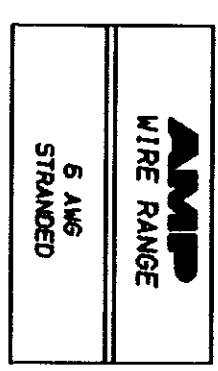

**METRIOR**  
 DIMENSIONS LISTED IN MM [ INCHES ]

NOTE:  
 1. WIRE INSULATION DIA 7.87 [ 0.310 ] MAX

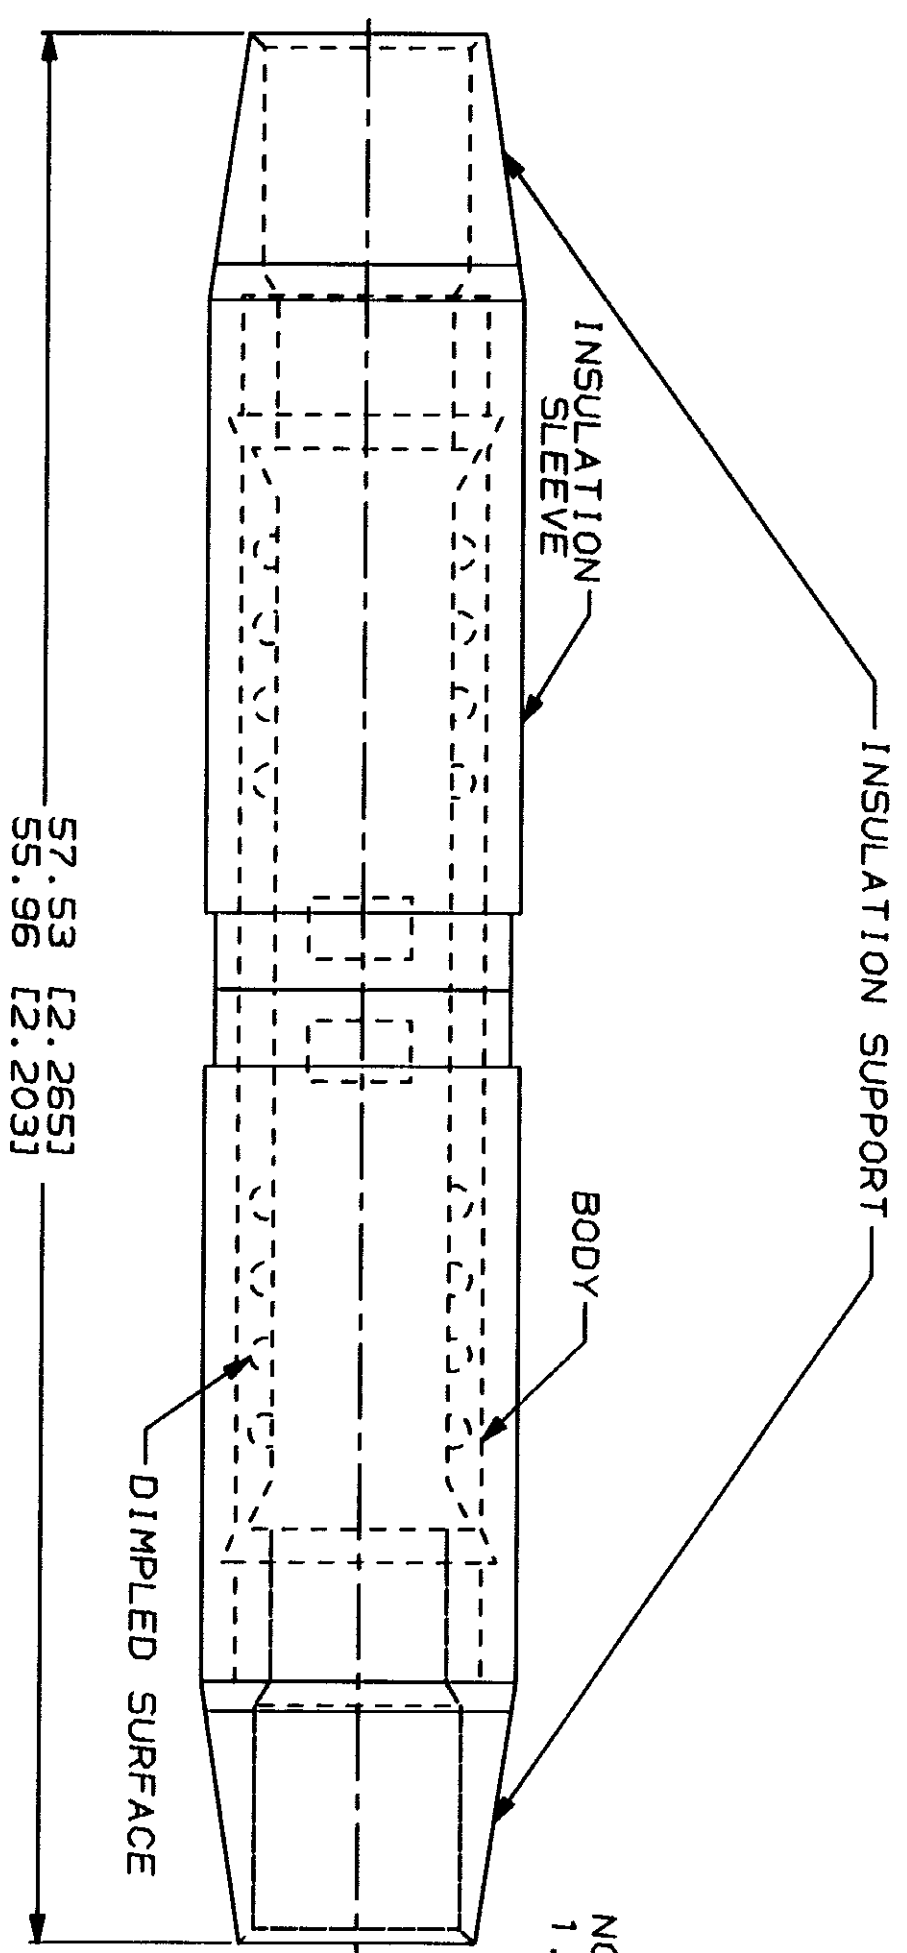

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. DIMENSIONS SPECIFIED IN MILLIMETERS		DR	7-28-93	S.S. GOULDER	100	LOOSE PC	324660
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		TOLERANCES UNLESS SPECIFIED: 2 PLG DEC ± 0.201.0002 3 PLG DEC ± 0.201.0002 ANGLES ± 0.5°		CHK	7-28-93	R. HEBERT	QTY	PACKAGE TYPE	PART NO
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		MATERIAL COPPER PER ASTM B-152 ANNO, COLOR, BLUE		APPD	7-28-93	B. BAILE		AMP	AMP Incorporated Harrisburg, PA 17105-3608
TOOLING INFORMATION		1-800-526-5142		FINISH TIN PLATE PER MIL-T-10727		APPD	7-28-93	M. ELLIS		SPLICE, BUTT, SINGLE TO SINGLE, TERMINAL, WIRE SIZE: 6 AWG	
FOR ORDER ENTRY		1-900-526-5142		APPROVAL SPEC		SCALE	NTS				