


REV.	ECN NO.	REVISIONS	DRN.	CKD.	APP.	DATE
A	—	NEW RELEASE	JAV			

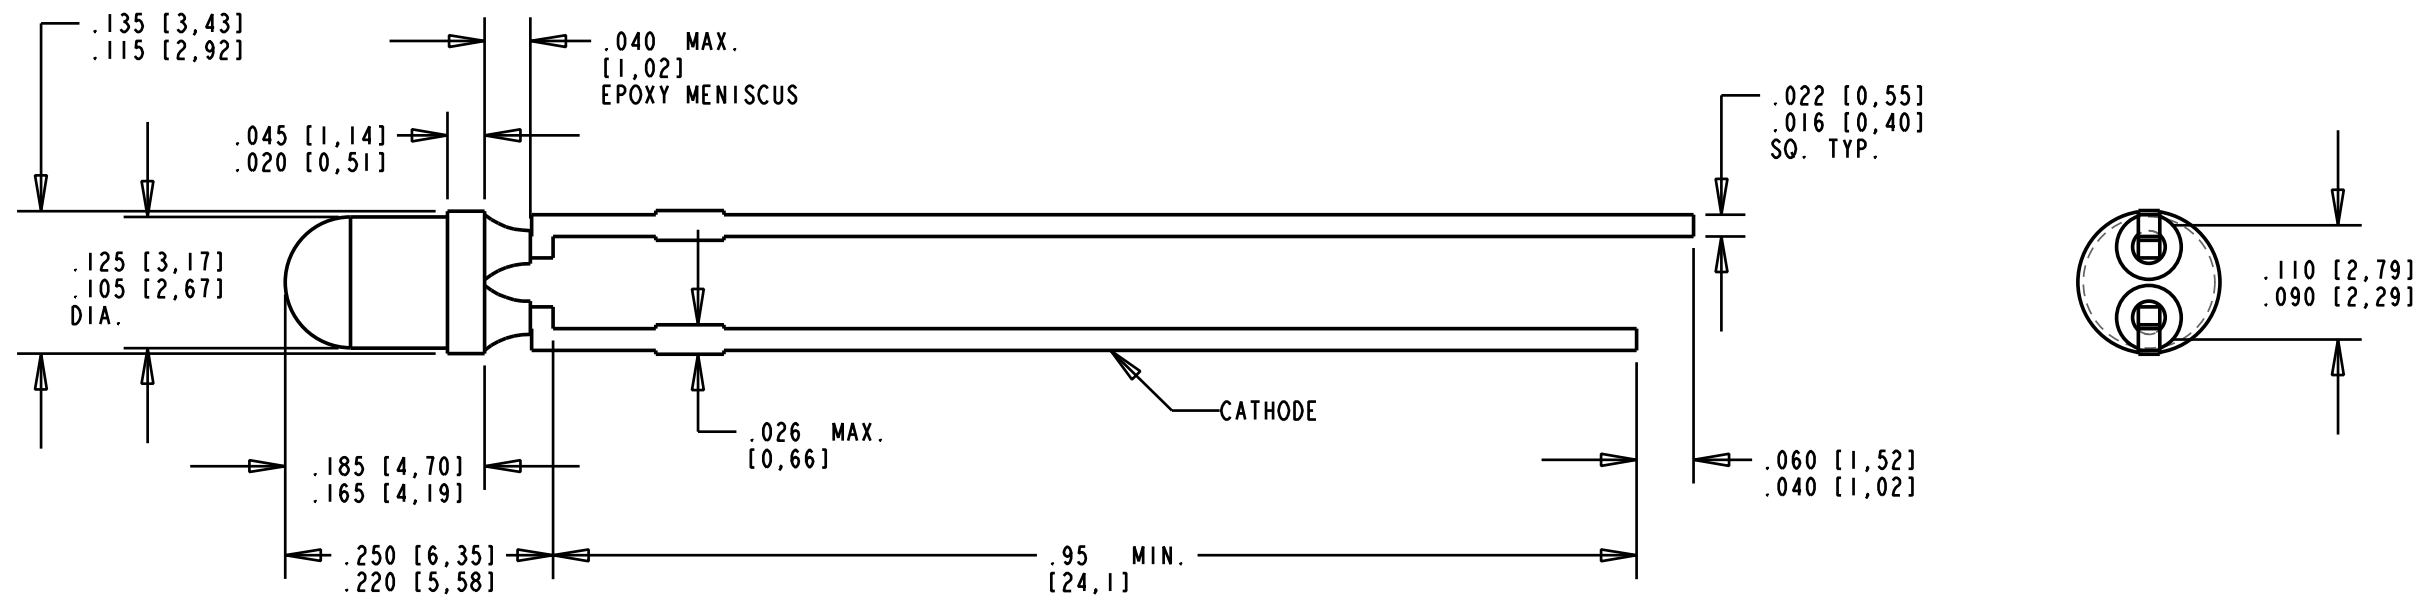

NOTES:

1. LENS COLOR: WATER CLEAR (NON-TINTED, NON-DIFFUSED).
2. DIE: InGaN BLUE
3. LEAD SPACING MEASURED NEAR EPOXY PACKAGE.
4. DIALIGHT PART NUMBER: 521-9918

OPERATING CHARACTERISTICS AT 25°C AMBIENT					
LED CHARACTERISTICS	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	240		680	mc d	I _f = 20 mA
FORWARD VOLTAGE		3.5	4.0	V	I _f = 20 mA
REVERSE CURRENT			10	μA	V _R = 5 V
DOMINANT WAVELENGTH		470		nm	I _f = 20 mA
PEAK WAVELENGTH	460	464	480	nm	I _f = 20 mA
VIEWING ANGLE (2 θ 1/2)		50		Degree	

ABSOLUTE MAXIMUM RATINGS AT 25°C AMBIENT	VALUE	UNITS
POWER DISSIPATION	140	mW
FORWARD DC CURRENT	30	mA
LINEAR DERATION FROM 55°C	0.8	mA/°C
PEAK FORWARD CURRENT ($\pm 1/10$ DUTY CYCLE $T_w < \pm 10\text{msec.}</math>)$	100	mA
REVERSE VOLTAGE @ I _R = 10 mA	5	V
OPERATING TEMPERATURE	-35 TO +85	°C
STORAGE TEMPERATURE	-35 TO +85	°C
SOLDERING TEMPERATURE FOR 5 SECONDS	260	°C

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE: 6.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17092	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: ±1/64	∅ 3.0 mm BLUE LED	
DECIMALS (.XX): ±.01	MATERIAL	
DECIMALS (.XXX): ±.005	Dialight	
DECIMALS (.XXXX): ±.0005	1501 ROUTE 34 SOUTH	
ANGLES: ±1°	FARMINGDALE, NJ 07727	
FINISH:	FSCM 83330	SHEET OF FAMILY TABLE: