

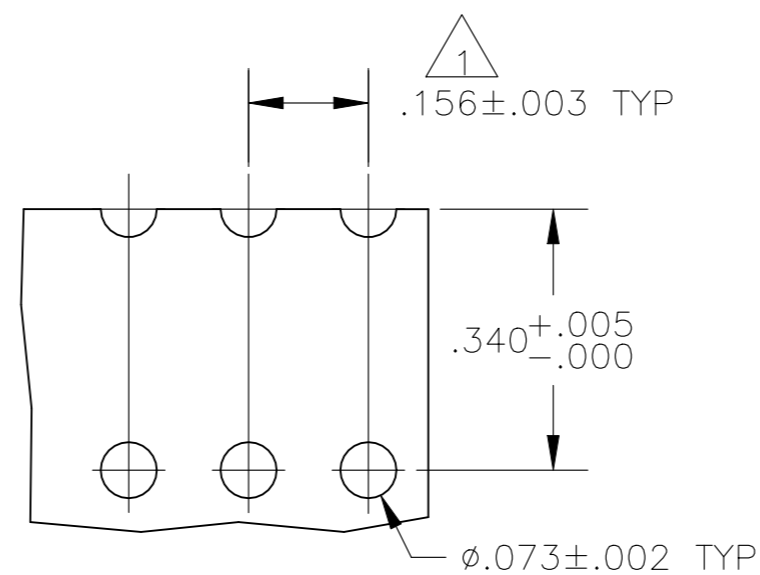
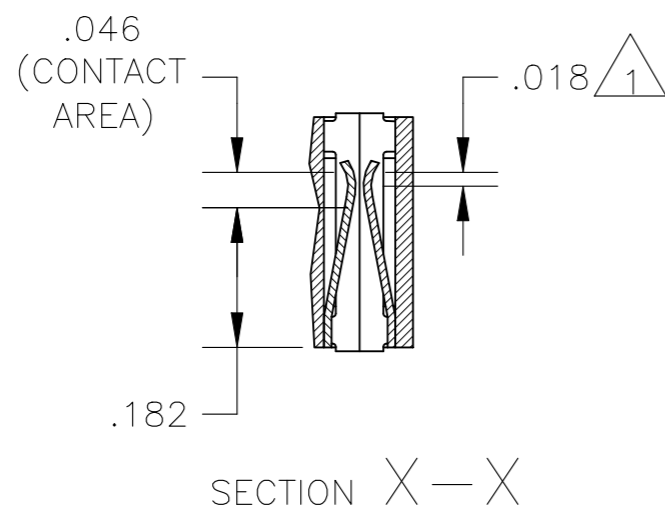
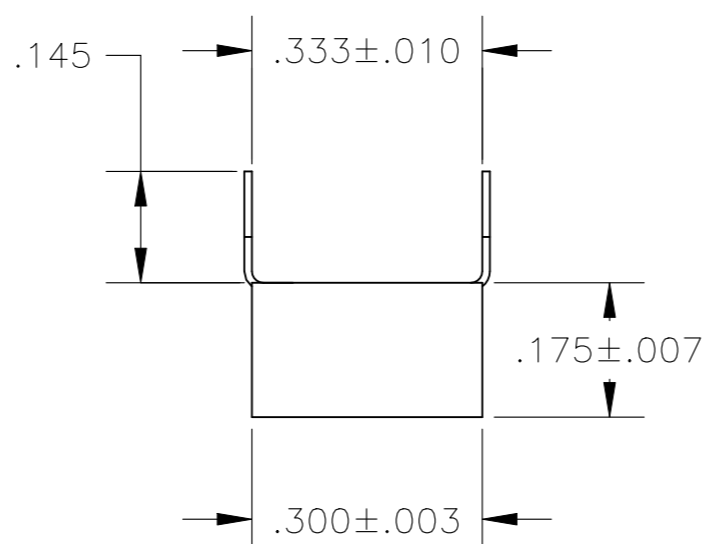


REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN APVD
L		RESIN SUPPLIER CHANGE FOR THE HOUSING	10MAY2022	SCB PS

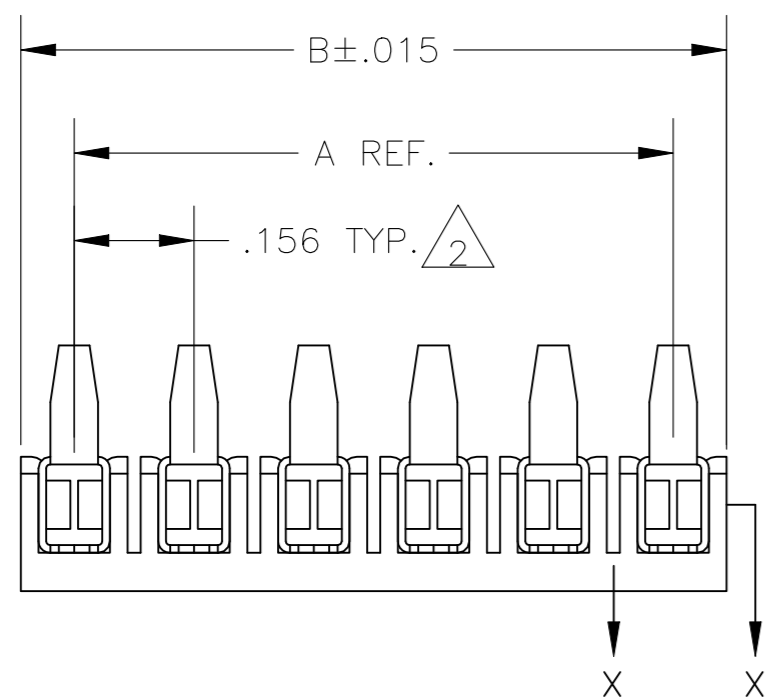

RECOMMENDED BOARD MOUNTING  
(RECOMMENDED BOARD THICKNESS: .055-.103)

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE OF BEAMS).
- 2 TOLERANCE NON-CUMULATIVE.
- 3 THE MATING END OF THE CONTACT IS IDENTIFIED BY THE LETTER "A" STAMPED ON THE RECEPTACLE BOX.
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

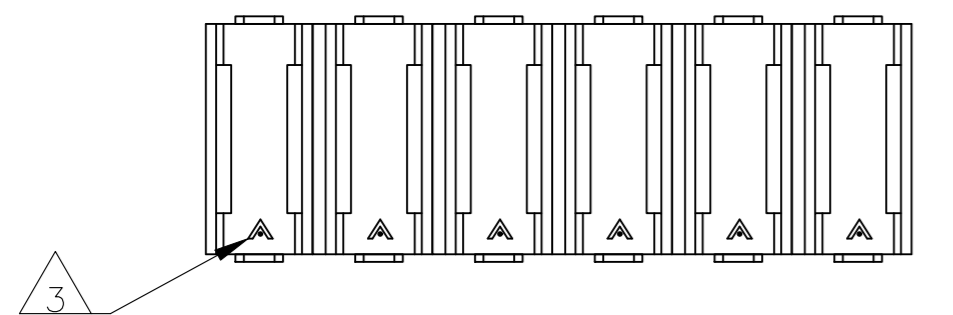

	B	A	NO OF POSN	ASSEMBLY PART NUMBER
<del>4</del> OBSOLETE	3.120	2.964	20	<del>-2-87988-0</del>
	2.964	2.808	19	1-87988-9
<del>4</del> OBSOLETE	2.808	2.652	18	<del>-1-87988-8</del>
	2.652	2.496	17	1-87988-7
OBSOLETE 4	2.496	2.340	16	<del>-1-87988-6</del>
	2.340	2.184	15	<del>-1-87988-5</del>
	2.184	2.028	14	<del>-1-87988-4</del>
	2.028	1.872	13	<del>-1-87988-3</del>
	1.872	1.716	12	<del>-1-87988-2</del>
	1.716	1.560	11	<del>-1-87988-1</del>
	1.560	1.404	10	1-87988-0
OBSOLETE 4	1.404	1.248	9	<del>-87988-9</del>
	1.248	1.092	8	<del>-87988-8</del>
	1.092	.936	7	87988-7
	.936	.780	6	87988-6
	.780	.624	5	87988-5
	.624	.468	4	87988-4
	.468	.312	3	87988-3
<del>4</del> OBSOLETE	.312	.156	2	<del>-87988-2</del>

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L A MAYER 17MAR86		
DIMENSIONS: INCHES		CHK P deJONG 17MAR86		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P deJONG 17MAR86	NAME	
0 PLC ± -		PRODUCT SPEC	ASSY, MOD I, BOARD MOUNT RECP, .156 CL, STD PRESSURE, TYPE C, FOR ROUND HOLE MOUNTING	
1 PLC ± -		108-25,016	SIZE	RESTRICTED TO
2 PLC ± -		APPLICATION SPEC	A2	
3 PLC ± .005		108-25,016	CAGE CODE	
4 PLC ± -		WEIGHT	00779	
ANGLES ± -		CUSTOMER DRAWING	DRAWING NO	
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS: PHOS BRONZE		FINISH: CONTACTS: .000030 GOLD IN CONTACT AREA, GOLD FLASH ON THE REMAINDER, ALL OVER .000050 NICKEL	C=87988	
		SCALE	4:1	SHEET 1 OF 1
		REV	L	