

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M3	REVISED PER ECO-11-004820	11MAR11	RK	HMR
	M4	REVISED PER ECO-17-014338	20APR2018	RS	DR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

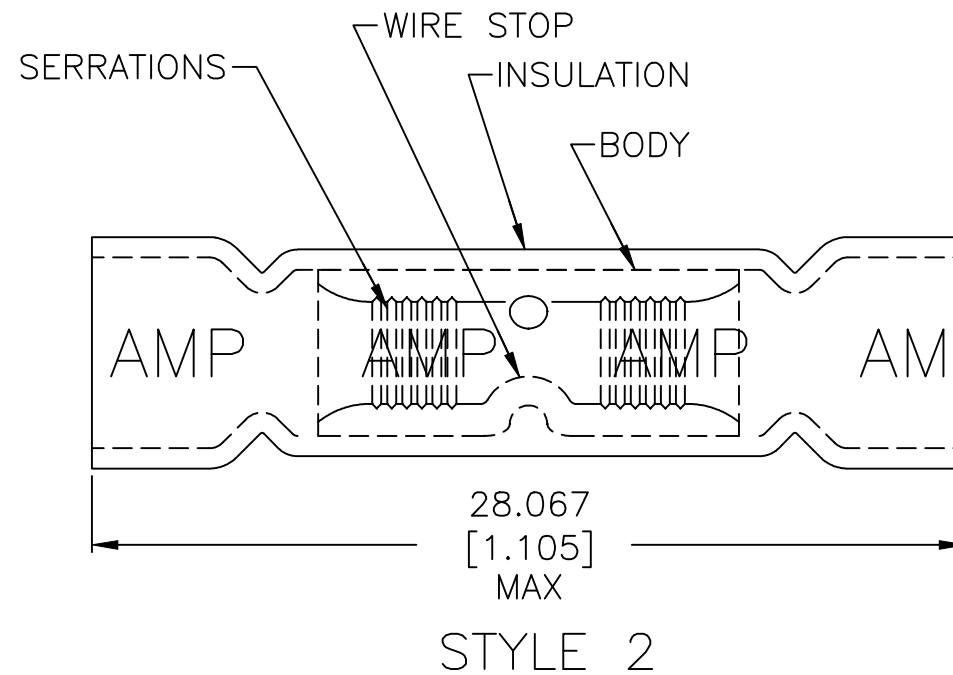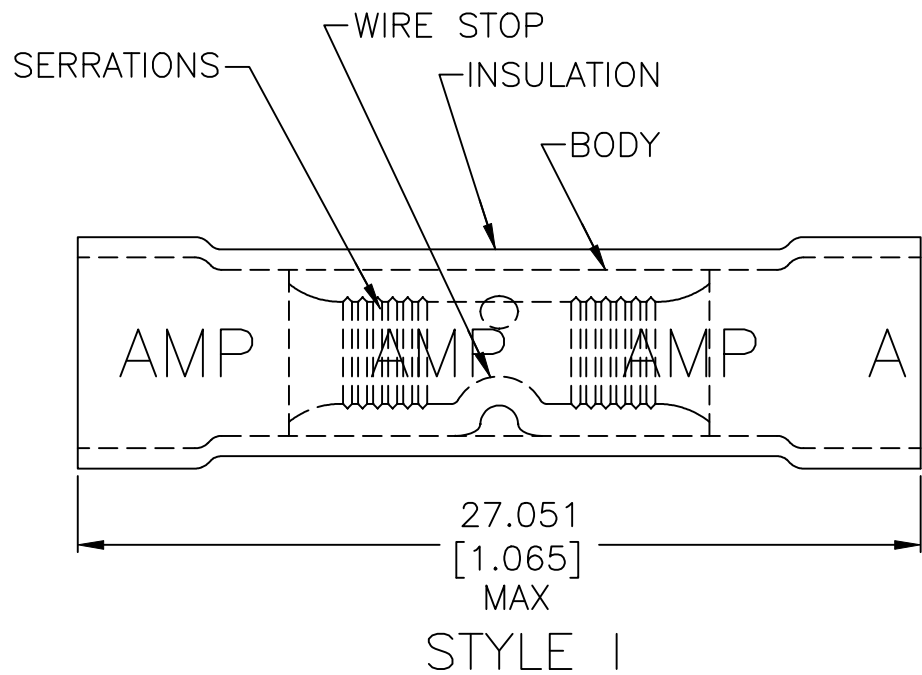

- 1 WIRE INSUL DIA,
2.921-4.318[.115-.170]
- 2 NOTE DELETED

STYLE	QTY	PACKAGE TYPE	PART NO
1	50	LOOSE PIECE, BAG	8-34071-5
1	5	LOOSE PIECE, BLS	8-34071-4
1	100	LOOSE PIECE, BOX	8-34071-1
2	2500	ON TAPE, REEL	2-34071-3
2	1000	LOOSE PIECE	2-34071-2
1	2500	ON TAPE, REEL	2-34071-1
1	1000	LOOSE PIECE	34071

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING TEMPERATURE:
105°C [221° F]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN M ELLIS 19JUL95

STE TE Connectivity Ltd.

VOLTAGE RATING:
600V MAX
(1000V FIXTURE OR SIGN)

DIMENSIONS:
mm [INCHES]


TOLERANCES UNLESS OTHERWISE SPECIFIED:

CHK C PRESNELL 19JUL95

APVD S BORTNER 19JUL95

NAME
SPLICE, BUTT, PLASTI-GRIP
WIRE SIZE 16-14 AWG

CIRCULAR MIL AREA:
1.04-2.62mm²[2,050-5,180]
SOLID OR STRANDED



0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -

PRODUCT SPEC
UL486A-B

APPLICATION SPEC
114-2161

SIZE A3 CAGE CODE 00779 DRAWING NO C=34071 RESTRICTED TO -

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MATERIAL
BODY, CU ASTM B 152
INSULATION: PVC

FINISH
BODY:TIN PLATE ASTM B545
INSULATION: COLOR-BLUE

WEIGHT
CUSTOMER DRAWING

SCALE 4:1 SHEET 1 OF 1 REV M4