THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AJ	16

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REV PER OS14-0252-04	12-02-04	JDP	GM

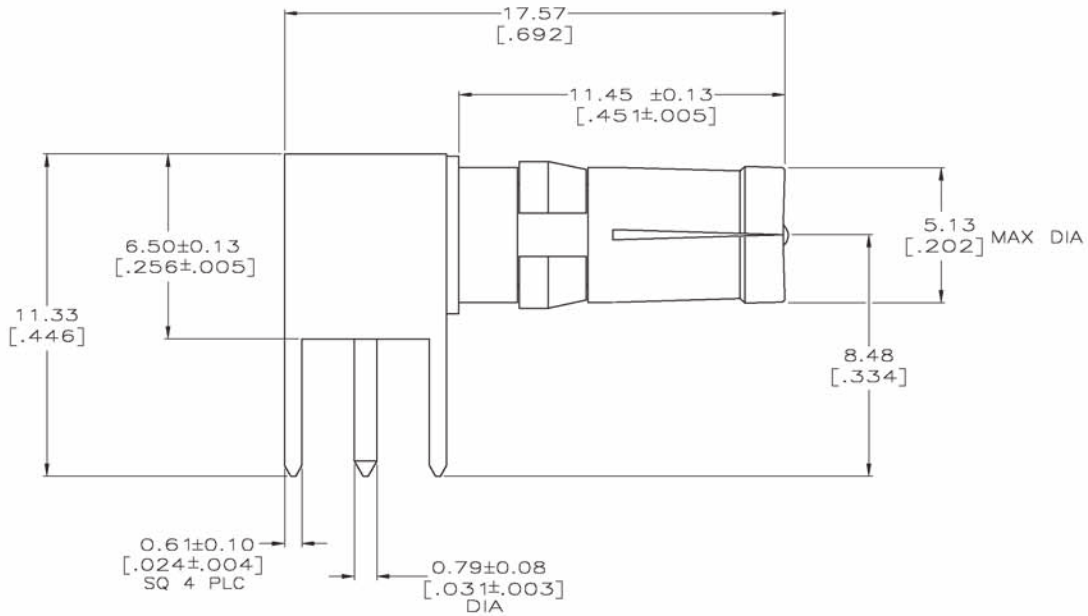

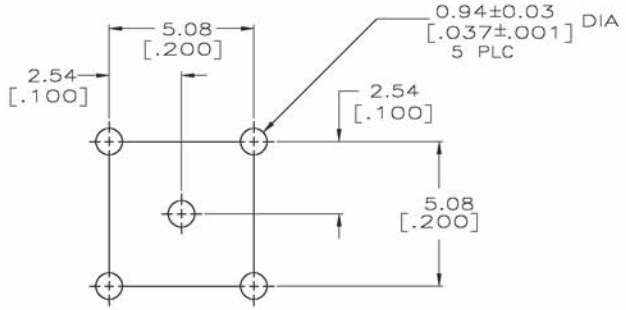

PCB CONFIGURATION

1. BRASS PER QQ-B-626.
2. PTFE PER MIL-P-19468.
3. PHOSPHOR BRONZE PER QQ-B-750.
4. BERYLLIUM COPPER PER QQ-C-530.
5. TIN PLATE PER ASTM-B-545.
6. COPPER PLATE PER MIL-C-14550.
7. NICKEL PLATE PER QQ-N-290.
8. GOLD PLATE PER MIL-G-45204.
9. DIELECTRIC AND CONTACT ASSEMBLY WILL WITHSTAND 2.5 LB PUSHOUT FORCE DIRECTED FROM MATING END.

OBSOLETE	221162-2
	221162-1
	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .010
4 PLC ± –
ANGLES ± 0° 30'

MATERIAL –
FINISH –

DWN H. B. JOHNSON 08-20-91
CHK B. WERNER 08-29-91
APVD D. DOYE 09-5-91
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

tyco Electronics — Tyco Electronics Corporation, Harrisburg, Pa 17105-3608

NAME SOCKET,PCB,RIGHT ANGLE SIZE 8, HDI

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-221162	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV G

221162