



<b>Order Code</b>	<b>TCK-176</b>
<b>Inductance</b>	4.7 $\mu$ H $\pm$ 20% (at 100 kHz / 1 V)
<b>Impedance (DCR)</b>	52 m $\Omega$ max.
<b>Rated Current</b>	4.5 A max.
<b>Operating Temperature</b>	-40°C to +125°C
<b>RoHS Exemptions</b>	No Exemptions



### Impedance Curve

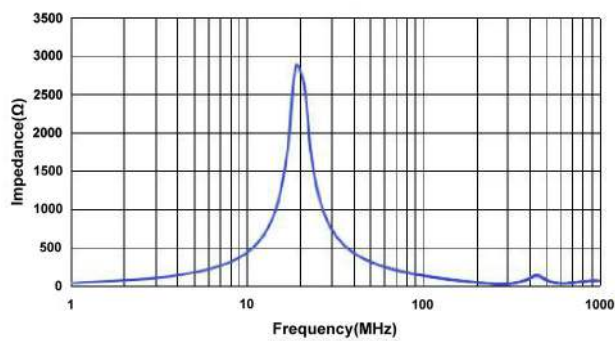

### Outline Dimensions

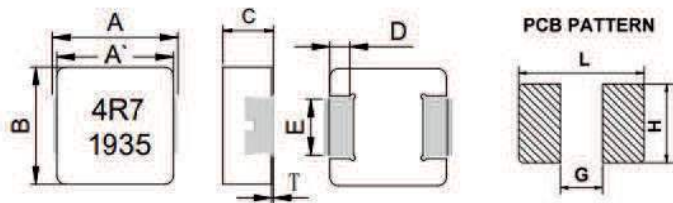

#### Dimensions [mm]

Dimension	Value [mm]
A	4.9 $\pm$ 0.6
A'	4.7 $\pm$ 0.4
B	4.7 $\pm$ 0.4
C	2.8 $\pm$ 0.4
D	1.0 $\pm$ 0.5
E	1.5 $\pm$ 0.4
T	0 - 0.15
L	5.5
G	2.5
H	1.8

All specifications valid at +25°C, unless otherwise stated.