


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL RELEASE	10MAY11	RC	CW

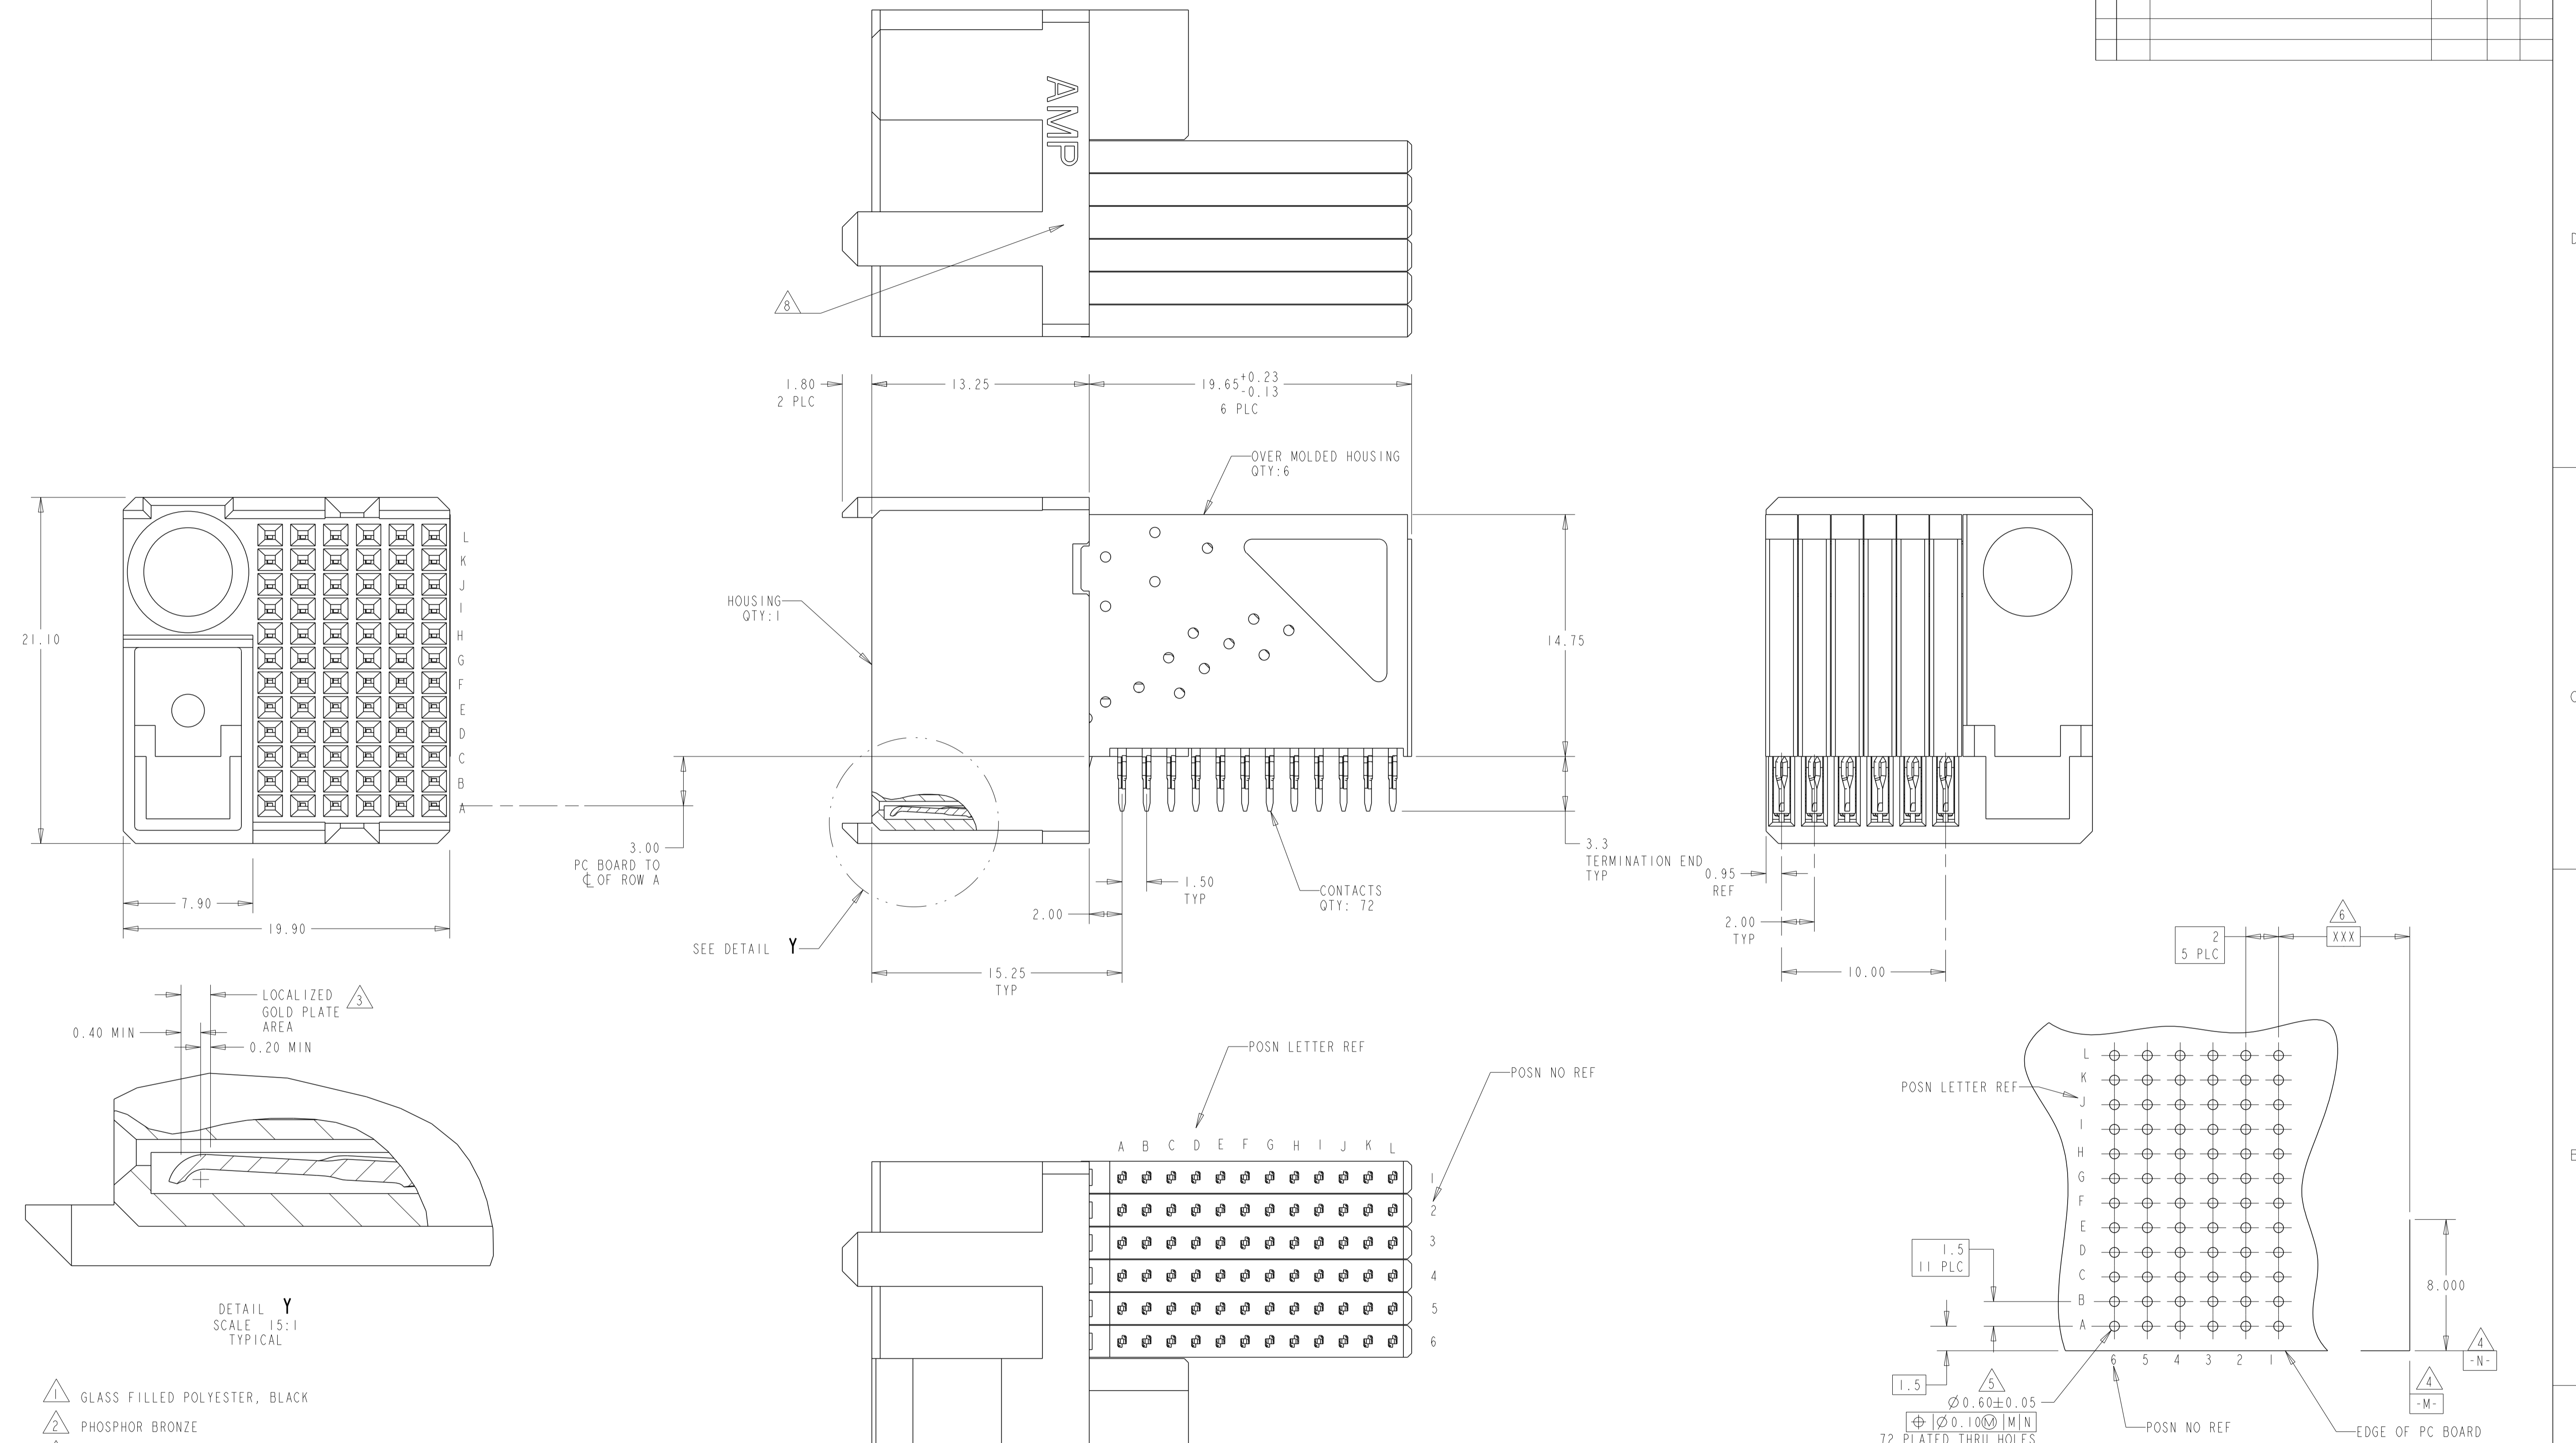

- ① GLASS FILLED POLYESTER, BLACK
- ② PHOSPHOR BRONZE
- ③ CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- ④ DATUMS ESTABLISHED BY CUSTOMER.
- ⑤ DRILLED HOLE DIAMETER 0.700±0.025
COPPER THK 0.025-0.05
TIN THICKNESS 0.004-0.01
- ⑥ DIMENSION ESTABLISHED BY CUSTOMER.
- ⑦ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ⑧ CONNECTOR PRINTED WITH PART NUMBER AND DATE CODE, LOCATED APPROXIMATELY AS SHOWN.

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
RECOMMENDED PRINTED CIRCUIT BOARD
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

③⑦ 1645569-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: RAYMOND CAO CHK: ALEX SHOAL APVD: MANGIAN WANG	TOMAY11 TOMAY11 TOMAY11	TE Connectivity											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME: RECEPTACLE ASSEMBLY, SIGNAL/GROUND COMBINATION, 72 POSITION, LEFT HAND, Z-PACK 12 HM											
<table border="1"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±0.2</td></tr> <tr><td>2 PLC</td><td>±0.2</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> </table>		0 PLC	±	1 PLC	±0.2	2 PLC	±0.2	3 PLC	±	4 PLC	±	APPLICATION SPEC		SIZE: A1	
0 PLC	±														
1 PLC	±0.2														
2 PLC	±0.2														
3 PLC	±														
4 PLC	±														
MATERIAL: HOUSING: ① CONTACTS: ②		WEIGHT		CAGE CODE: 00779											
		FINISH: CONTACTS: ③⑦		DRAWING NO: 1645569											
		CUSTOMER DRAWING		SCALE: 5:1 SHEET 1 OF 1 REV A											