



DATE BY REVISION

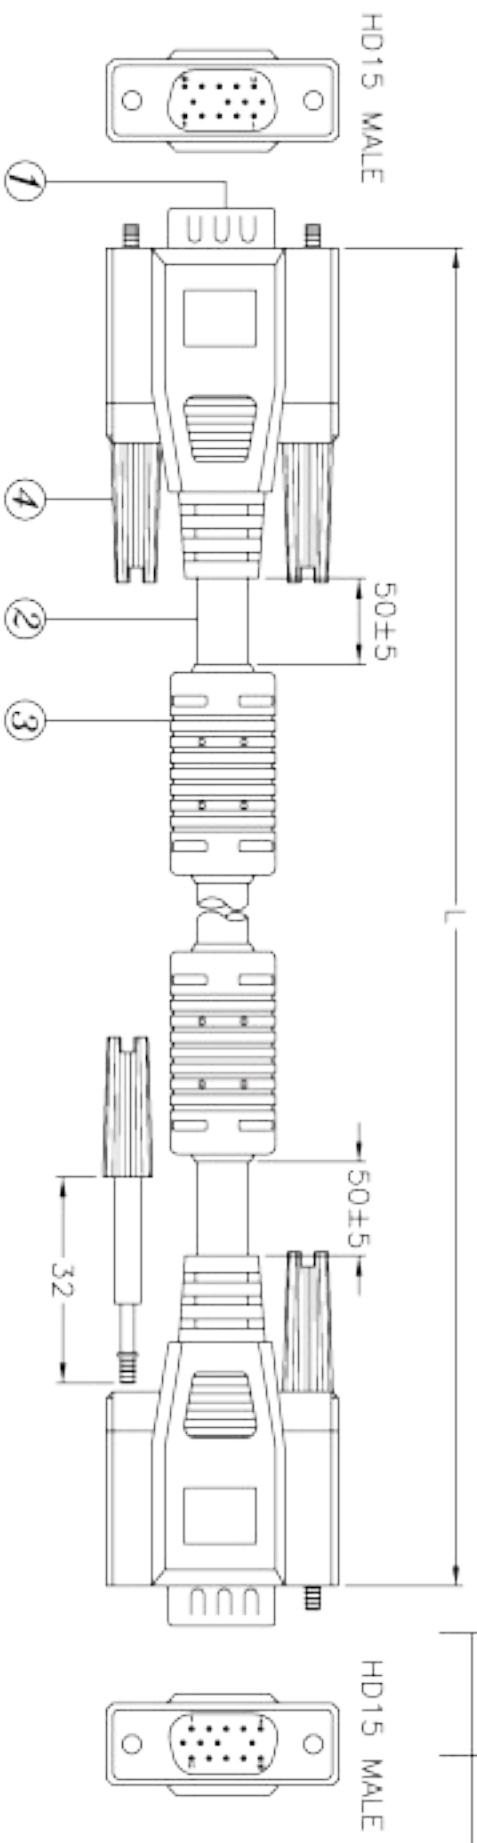

CONFIGURATION:  
HD15M

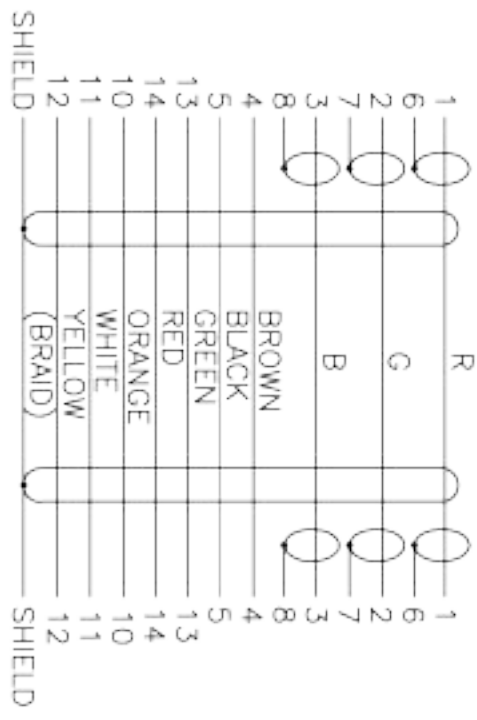

- MAT'L:
1. CABLE: #28, UL2919, 3COAX+7C+1+AL/MY+Braid, O.D:8.5
  2. CONNECTOR: HD15M, 9th EMPTY, BLACK
  3. THUMBSCREW: #4-40UNC, E32
  4. FERRITE CORE: RH16x28x9
  5. COPPER TAPE: 30x50mm
  6. BLACK HEAT SHRINK TUBE:  $\phi$ 1.0x14:6PCS  $\phi$ 3x8:6PCS

- NOTE:
1. TOTAL LENGTH: L
  2. COLOR: BEIGE
  3. MOLED TYPE
  4. 360° SOLDER
  5. ROHS COMPLIANT

ITEM NO.	L
AK3815XF	15000±100mm
AK3820XF	20000±100mm

**ROHS**  
Compliant

DATE	16 JUL, 2001	PARTS NO	MN3271N
UNIT	MM	DRAWN NO	001525
SCALE		BUYER NO	002

TITLE:  
HD15 MALE-HD15 MALE, W/2\*FERRITE  
(MOLED TYPE)

NO.	DESCRIPTION	QTY
④	THUMBSCREW: #4-40UNC, E32	4
③	FERRITE CORE: RH16x28x9	2
②	#28, UL2919, 3COAX+7C+B, O.D:8.5, BEIGE	L
①	HD15M, 9th EMPTY, BLACK	2

DRAWN	Y.C.C	CHECK	APPRO
	7/16		
ASSMANN ELECTRONICS, INC.			