


product type designation

product description

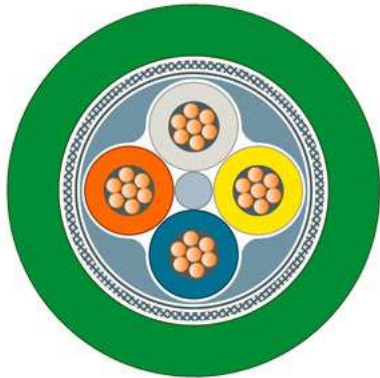

IE FC TP FRNC Cable GP 2x2 (Type B)

Flexible halogen-free bus cable acc. to IEC 60754-1/2 (4-core), sold by the meter, unassembled

Industrial Ethernet FC TP FRNC GP cable TP installation cable for connection to FC outlet RJ45, 4-core, shielded, Cat5, sold by the meter, delivery unit max. 4000 m, minimum order quantity 20 m .

suitability for use

For occasionally moved machine parts

cable designation

L-9YH (ST) CH 2x2x0,34/1,5-100 GN VZN FRNC SF/UTP

electrical data

attenuation factor per length

- at 10 MHz / maximum
- at 100 MHz / maximum

0.06 dB/m
0.22 dB/m

impedance

- at 1 MHz ... 100 MHz

100 Ω

relative symmetrical tolerance

- of the characteristic impedance at 1 MHz ... 100 MHz

15 %

near-end crosstalk per length

- at 1 MHz ... 100 MHz

0.5 dB/m

transfer impedance per length / at 10 MHz

10 mΩ/m

loop resistance per length / maximum

120 mΩ/m

operating voltage

- RMS value

80 V

NVP value in percent

66 %

mechanical data

number of electrical cores

4

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires

type of electrical connection / FastConnect

Yes

core diameter

- of AWG22 insulated conductor

0.75 mm

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

0.75 mm
1.5 mm
3.9 mm
6.5 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.2 mm

material

- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

PP
FRNC
FRNC

color

<ul style="list-style-type: none"> of the insulation of data wires of cable sheath 	white/yellow/blue/orange green
bending radius	
<ul style="list-style-type: none"> with single bend / minimum permissible with multiple bends / minimum permissible 	39 mm 97.5 mm
tensile load / maximum	150 N
weight per length	68 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport during installation note 	-25 ... +70 °C -40 ... +75 °C -40 ... +75 °C 0 ... 50 °C Electrical properties measured at 20 °C, tests according to DIN VDE 0472
fire behavior	flame resistant according to IEC 60332-3-22 (Category A/F), IEC 61034-2
chemical resistance	
<ul style="list-style-type: none"> to mineral oil to grease to water 	oil resistant according to IEC 60811-2-1 (4 h / 70°C) Conditional resistance conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> halogen-free silicon-free low-emission according to IEC 61034-2 	Yes; halogen-free according to IEC 60754-1/2 Yes Yes
wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> with 100BaseTX 	100 m
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	Yes; c(ETL)us, CMG / PLTC / Sun Res / OIL RES
UL/ETL style / 600 V Rating	Yes
certificate of suitability	
<ul style="list-style-type: none"> EAC approval CE marking RoHS conformity 	Yes Yes Yes
standard for structured cabling	Cat5e
Marine classification association	
<ul style="list-style-type: none"> American Bureau of Shipping Europe Ltd. (ABS) French marine classification society (BV) Det Norske Veritas (DNV) Germanische Lloyd (GL) Lloyds Register of Shipping (LRS) Nippon Kaiji Kyokai (NK) Polski Rejestr Statkow (PRS) 	No No No No No No No
reference code	
<ul style="list-style-type: none"> according to IEC 81346-2 according to IEC 81346-2:2019 	WG WGB
further information / internet-Links	
Internet-Link	
<ul style="list-style-type: none"> to web page: selection aid TIA Selection Tool to website: Industrial communication to website: Industry Mall to website: Information and Download Center to website: Selection guide for cables and connectors to website: Image database to website: CAx-Download-Manager to website: Industry Online Support 	http://www.siemens.com/tia-selection-tool http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter https://sie.ag/2QdIxcP http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com
last modified:	5/10/2022 