

Ŧ	G	нт. П	m	0



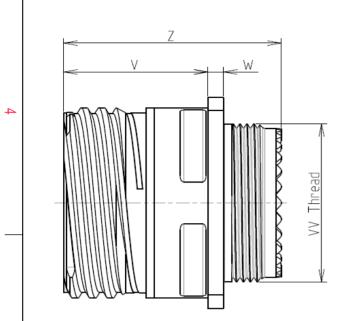

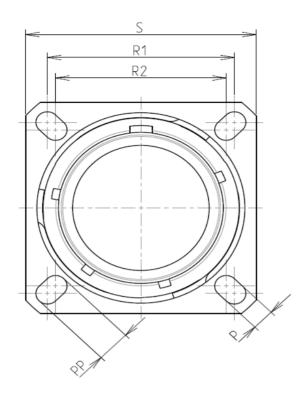

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 09

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souria	u contacts and Accessories		
	-Temperature Range	65°C to +200°C		
	-Salt Spray	: 500 hours		
	-Mass	: 25.23 g ± 10%		

8D 0

G

09

S

98

В

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		


ORIENTATION : N

D

CONTACT LAYOUT : 09-98

CONTACT TYPE : SOCKET(500 Matings)

Е





	4			
S EXAMPLE	3			
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)				
Intry Jurisdiction & Control List FR Not Listed	2			
9S98BN	_			
CUSTOMER DRAWING				
Steel Receptacle 8D series	-			
NPRDS / PROJECT				
859 This document is the property of	1			
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
UDRG N° SHEET				
	1			
S98BN-C 1/2 B A	J			

r		G	г	m		0
		Contact Layout				Panel Cuto
4	-X				A	SQUARE FLANGE RECEPTACLE (TYPE 0)
	Shell Arrangement Numb size 9 -98 3	X.avis (mm) Y-avis (mm) +.065 (1.65) +.038 (0.97) +.000 (0.00) 075 (1.91) 065 (1.65) +.038 (0.97) - 065 (1.65) +.038 (0.97)			α ₩	ØA ØT
ω						Dim ØA ØAA R1 ØT
	\vdash					SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either c
0						(professional recommenda Count FR PN: 8D009
					ISS DATE Designed By:	Date:
_					SCALE NA	General linear Tolerances:
					FORMAT A3	SOURIAU 8D009S
	Н	G	F F	E	D	C

