


FEMALE END VIEW




- 1=WH
- 2=BN
- 3=GN
- 4=YE
- 5=GY
- 6=BU
- PE=GN/PE

HARTING P/N	Type of cable	Cable length(mm)
21375200701050	PUR	5000 ⁺²⁰⁰ ₋₀
21375200701100	PUR	10000 ^{+4.00} ₋₀
21375200703050	PVC	5000 ⁺²⁰⁰ ₋₀
21375200703100	PVC	10000 ^{+4.00} ₋₀

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACTS	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
O-RING MATERIAL	NBR	
RATED CURRENT	8 A	
RATED VOLTAGE	300 V	
OUTER CABLE JACKET MATERIAL/CLLOR	PUR/BLACK	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PP	
NUMBER OF CONDUCTORS (AWG)	7X18AWG	
OPERATING TEMPERATURE	-20°C — +80°C	
PROTECTION CLASS	IEC IP67	

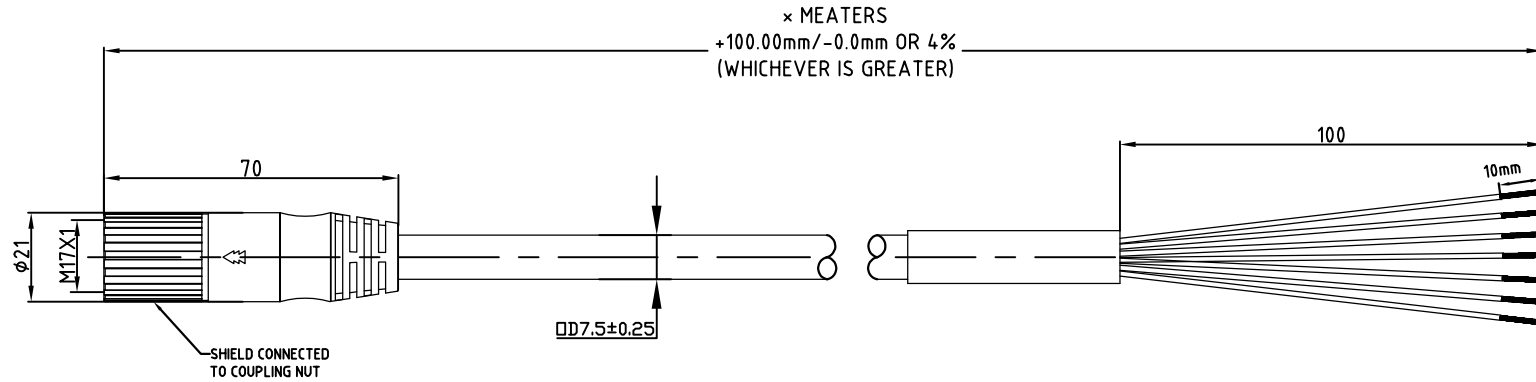

	All rights reserved	Tech. Character.		Free size tol.		According to production drawing	
	Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-03-15	State Final release	
HARTING Customised Solutions		Title M17 FE str molded 6+PE PUR/PVC open end, L=xxM				Doc-Key / ECM-Nr. /	
D-32339 Espelkamp		Type TB	Number 2137 52 00 7 0X XXX			Rev. A	Page 1/1

Rev.	Description	Appr.	Date
A	First issue.	Ivy Lin	03/15/21