

# Wireless Soil NPK Sensor

---

Wireless Network Based on LoRa Technology



## R72632A01 Data Sheet

**Copyright©Netvox Technology Co., Ltd.**

This document contains proprietary technical information which is the property of NETVOX Technology and is issued in strict confidential and shall not be disclosed to others parties in whole or in parts without written permission of NETVOX Technology.

The specifications are subjected to change without prior notice.

## Introduction

R72632A01 can detect and send soil nitrogen (N), phosphorus (P) and potassium (K) data. It is a wireless communication mode, adopts SX1276 wireless communication module.

The soil NPK sensor of R72632A01 has high precision, fast response, stable output and less affected by soil salt content. It is suitable for all kinds of soil and can be buried in the soil for a long time, resistant to long-term electrolysis, corrosion, vacuum filling and it is waterproof.

Note:

1. The device is suitable for measuring ordinary yellow-cinnamon soil, black soil, and terra rossa.
2. It is not applicable to saline-alkali land, sandy land, or other powdery objects with high salinity.  
The soil humidity shall be more than 25%


## Main Characteristics

- Adopt SX1276 wireless communication module
- Soil nitrogen (N), phosphorus (P) and potassium (K) detection
- IP rating: Main body: IP65, Soil NPK Sensor: IP68
- Compatible with LoRaWAN™ Class A
- Frequency hopping spread spectrum technology
- Configuration parameters can be configured through a third-party software platform, data can be read and alerts can be set via SMS text and email (optional)
- Applicable to third-party platforms: Actility / ThingPark, TTN, MyDevices / Cayenne

## Application

- Scientific experiment, greenhouse, flowers and vegetable, grassland and pasture, soil rapid measurement, plant culture etc.

### Dimensions

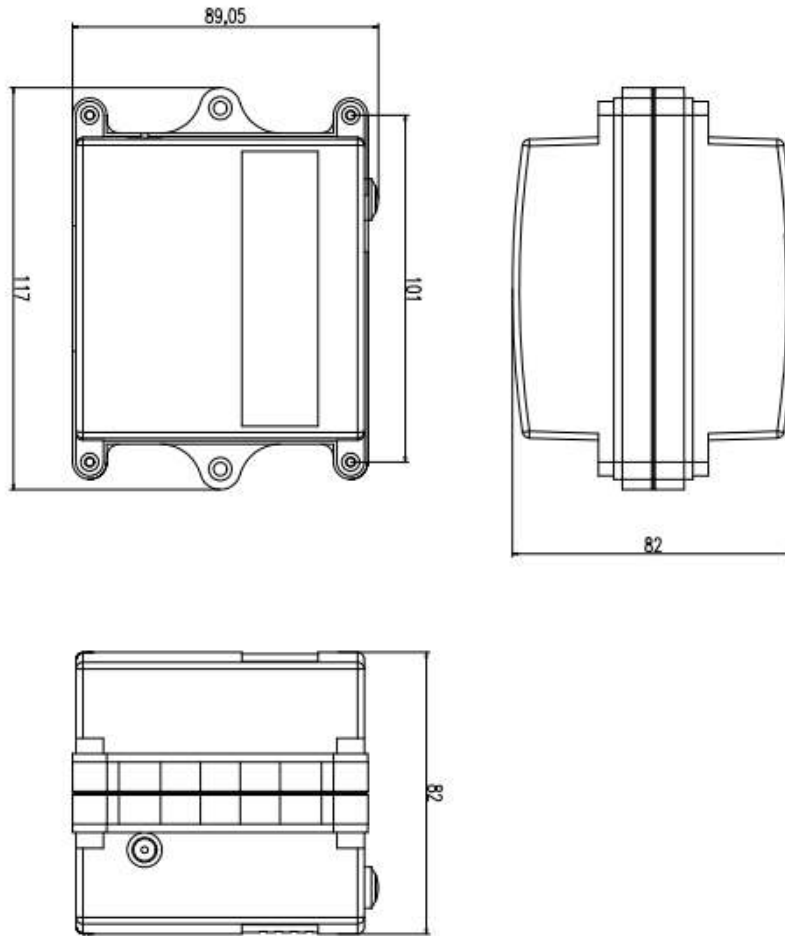

### Electrical Characteristics

|                      |  |
|----------------------|--|
| Power Supply Mode    | 8 x ER14505 lithium batteries supply power, with a total battery capacity of 9600mAh   |
| Battery Instructions | When the ER14505 lithium battery is used for the first time, it is necessary to ensure that the lithium battery has been activated, and the inactive lithium battery needs to be activated. Activation method: ER14505 single battery is connected in parallel with 67 ohm resistance for 8 minutes, and the load voltage is $\geq 3.2V$ , that is, it is determined that the activation is completed (the activation duration, load voltage value and resistance value parameters are related to the actual batteries of different brands). |

## Wireless Soil NPK Sensor

|                              |   |
|------------------------------|---|
| Battery Life                 | 1.39 years<br>(Conditions: ambient temperature 25 °C, preheating for 20 seconds, 60min report once, txpower = 20dbm, LoRa spreading factor SF = 10) The specific measurement shall prevail. |
| Power Supply Voltage         | 6.8VDC to 7.2 VDC   |
| Low Voltage Alarm            | 6.8VDC  |
| Sleeping Current             | ≤400uA  |
| Battery Measurement Accuracy | ± 0.1V  |

**RH100 Module Characteristics**

|                      |             |
|----------------------|-------------|
| Wakeup Current       | 6.3mA/ 3.3V |
| RF Receiving Current | 11mA/ 3.3V  |
| RF Emission Current  | 120mA/ 3.3V |

**Soil NPK Sensor**

|                                  |   |
|----------------------------------|---|
| Communication Mode               | RS-485  |
| Working Voltage                  | 5V DC (special customization)                                   |
| Detection Range of Soil NPK      | 0-1999 mg/kg  |
| Detection Accuracy of Soil NPK   | ±2% F.s   |
| Detection Resolution of Soil NPK | 1mg/kg (mg/L)   |
| Storage Environment              | -20°C-60°C  |
| Working Pressure Range           | 0.9 - 1.1 atm   |
| Response Time                    | <1S   |
| IP Rating                        | IP68  |
| Installation                     | Fully embedded or probe fully inserted into the measured medium |

## Wireless Soil NPK Sensor

**Frequency**

|                          |  |
|--------------------------|--|
| Frequency Range          | 863MHz-928MHz 470MHz-510MHz  |
| Power Output             | US915 20dbm;<br>AS923 16dbm;<br>AU915 20dbm;<br>CN470 19.15dbm;<br>EU868 16dbm;<br>KR920 14dbm;<br>IN865 20dbm;                                      |
| Receiving Sensitivity    | -136 dBm (LoRa, Spreading Factor=12, Bit Rate = 293bps)<br>-121 dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)                                |
| Antenna Type             | Built-in antenna   |
| Communication Distance   | Up to 10 km (visible linear obstacle-free transmission distance, actual transmission distance depends on the environment.)                           |
| Data Transfer Rate       | 0.3 kbps to 50 kbps (LoRaWan)<br>1.2 kbps to 300 kbps (FSK)  |
| Modulation System Mode   | LoRa/FSK (choose one of them)  |
| Supportable LoraWAN Band | EU863-870,US902-928,AU915-928,KR920-923,AS923-1,<br>AS923-2,AS923-3,IN865-867,CN470-510<br>(Note: optional, to be done in the factory configuration) |

**Physical**

|                           |   |
|---------------------------|---|
| Size                      | Main Body: 117 mm x 89.05 mm x 82 mm<br>NPK Sensor: 137mm x 45mm x 15mm |
| Sensor Wiring             | 1.25m   |
| Ambient Temperature Range | -20°C ~ 55 °C   |
| Ambient Humidity Range    | <90% RH (no condensation)   |
| Storage Temperature Range | -40 °C ~ 85 °C  |