

# Data sheet

## 15296.2 SD-S15C



Interface module for D-SUB, Screw connection and male D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 15

### Business data

Article number	<u>15296.2</u>
Article name	SD-S15C
GTIN (EAN)	4044211047009
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	70.5 g
Weight per piece (including packaging)	102.1 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

### Technical data

#### Dimensions

Length	47 mm
Width	51 mm
Height TS 35/7.5	61 mm

#### Ratings

Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Number of connections	1
No. of poles	15
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Torque	0.6 Nm

#### Input data

Max. operating voltage AC/DC	125 V
Current load per channel, max.	1,5 A

#### Materials

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

#### Further technical data

Mounting type	TS 35
Connector type	D-sub male plug
Test voltage	0.67 kV
Shielded	✓

# Data sheet

## 15296.2 SD-S15C



---

### Technical data

---

#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2023-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

---

# Data sheet

## 15296.2 SD-S15C



---

### Approvals

---

#### Standards and regulations

---

Standards / specifications

DIN VDE 0110 / EN 50178

---


# Data sheet

## 15296.2 SD-S15C

---

### Media

---

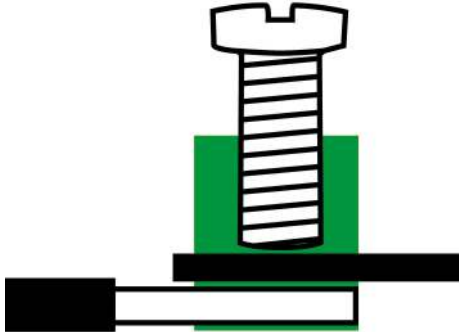

---

**Accessories**

---