
T	۵	т	m	D	0





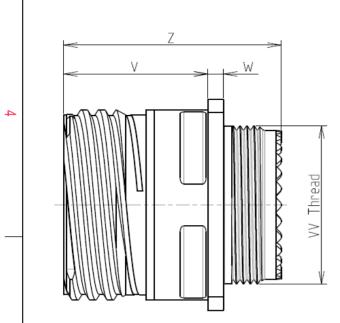

LAYOUT SHOWN AS

Keying Shown as example

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C : 500 hours -Salt Spray

: 41.72 g ± 10%

8D 0

G

13

S

04

S


F

А

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 23.01 R1 20.62 R2 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

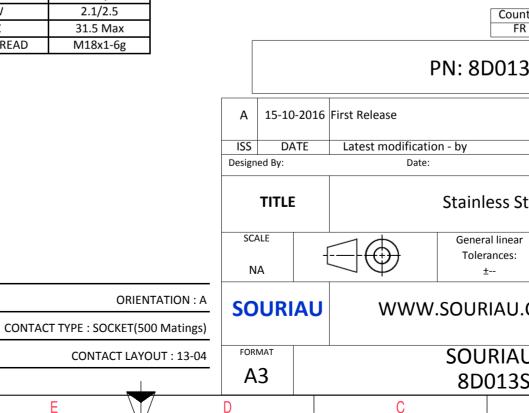

	ω		A			
					4	
S EXA	AMPLE				3	
whice er of t idatic untry R	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2	
		CUSTOMER	RDRAWING	MOD N°		
Steel Receptacle 8D series						
ar	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 4SA-C			SHEET		
50	43A-C B		A	,-	J	

-	Т	۵	וד	m		0	
		Contact Layout					Panel Cutout
4		X $(\begin{array}{c} \begin{array}{c} & & \\ & \\ & \\ \\ & \\ \end{array} \end{array} \right) $ $(\begin{array}{c} \\ \\ \\ \\ \\ \\ \\ \\ \end{array} \right) $ $(\begin{array}{c} \\ \\ \\ \\ \\ \\ \end{array} \right) $ $(\begin{array}{c} \\ \\ \\ \\ \\ \\ \end{array} \right) $ $(\begin{array}{c} \\ \\ \\ \\ \\ \\ \\ \end{array} \right) $ $(\begin{array}{c} \\ \\ \\ \\ \\ \\ \\ \\ \end{array} \right) $ $(\begin{array}{c} \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\$			ħ	SQUARE FLANGE RECEPTACLE (TYPE (REAR MOUNTING	
	Cont positio A B C D Shell Arrangement N size no. 13 -4	n ID (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) -0.083 (2.11) 146 (3.71) +.036 (0.89)			.¥ 		<u>s</u>
ω						Ø Ø/ R	MAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
	\vdash					SOURIAU shall not be due to a use of the the Specifications issue	e Products whi
N						(professional r	
					A 15-10-20	PN: 16 First Release	8D013S
					ISS DATE Designed By: TITLE	Date:	v ninless Ste
_					SCALE NA		eneral linear Tolerances: ±
					FORMAT		URIAU.CO DURIAU
					A3		3D013S0
_	Н	G	F	E	D	C	

