





**MATERIAL AND FINISH:**  
 Insulator: Polycarbonate, UL-94V-0 rated  
 Contacts: Copper, Tin plated


**ELECTRICAL SPECIFICATIONS:**  
 Inlet Current rating: 10 A   
 Fuse Holder Current rating: 6A  6.3A   
 Voltage rating: 250 VAC  
 Insulation resistance:  
 100 Mohm min. at 500 VDC  
 Dielectric withstanding voltage:  
 2000 VAC for one minute



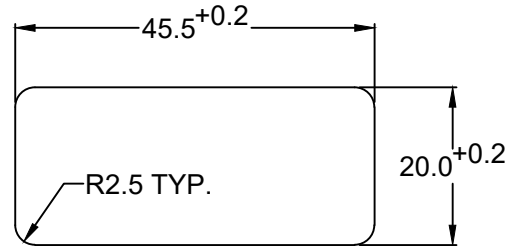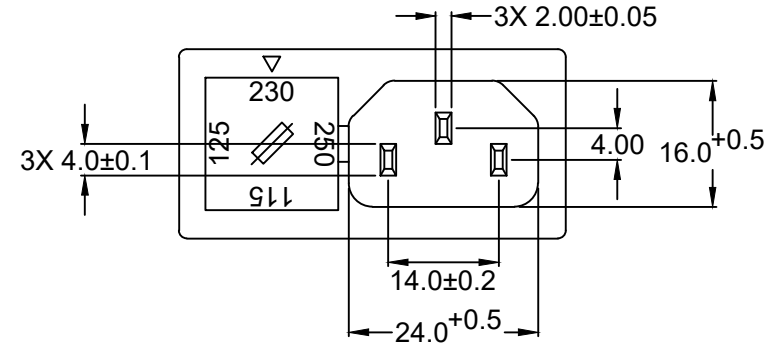


RECOMMENDED  
 PANEL CUTOUT


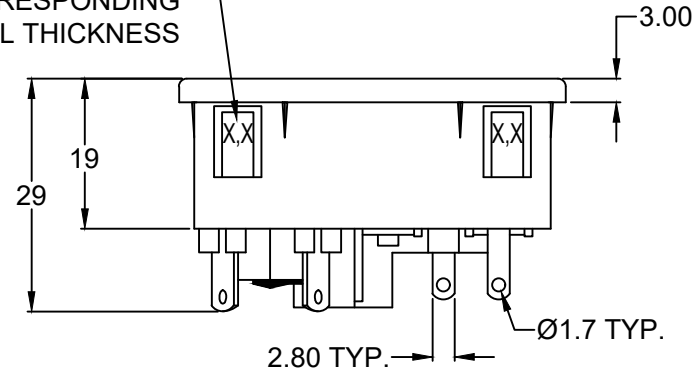


REPLACE WITH  
 CORRESPONDING  
 PANEL THICKNESS



ORDERING CODE:  
 42R34-3          -           
           1      2      3

- 1) COLOR  
 1 = BLACK  
 2 = GRAY
- 2) ELECTRICAL CIRCUIT  
 CONFIGURATION
- 1 = 10A 250V 70°C  
 2+GROUND 
- 2 = 10A 250V 120°C  
 2+GROUND 
- 4 = 10A 250V 70°C  
 2 POLE 

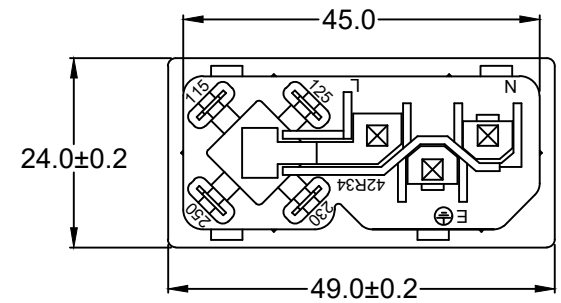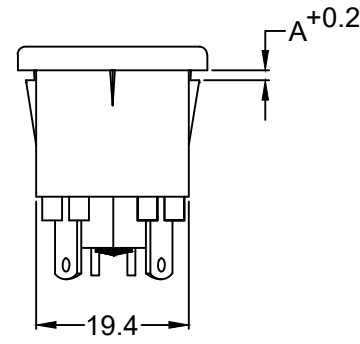

RoHS  
 COMPLIANT

P/N	A	MAX. PANEL THICKNESS
42R34-3X2X-150	1.5	1.5
42R34-3X2X-200	2.0	2.0
42R34-3X2X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS  
 AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	GQ
CHECK BY	TD
APPR BY	PB
DATE:	09/13/01
DATE:	09/18/01
DATE:	09/18/01

**Power Dynamics, Inc.**  
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION  
 FUSE HOLDER; SOLDER TERMINALS; SNAP-IN

PART #: **42R34-3X2X-XXX**

SIZE: A  
 SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY  
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1  
 REV: A

REVISIONS	CHANGE	CHK	CHK	APPR
REV	DATE	12/15/01	REVISED	CURRENT RATING
A				