
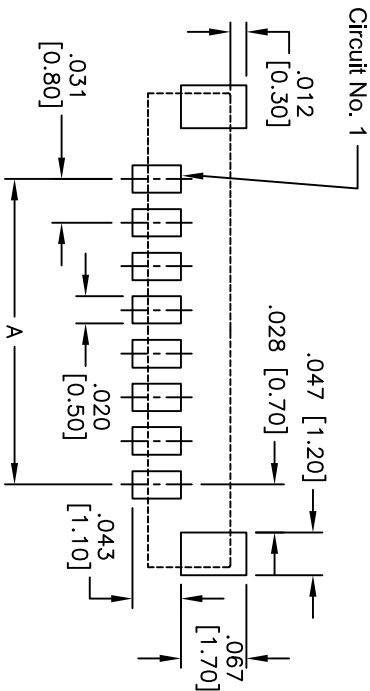
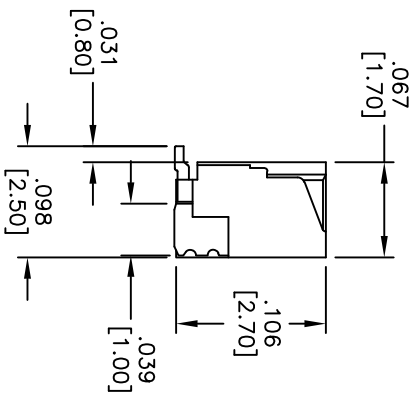
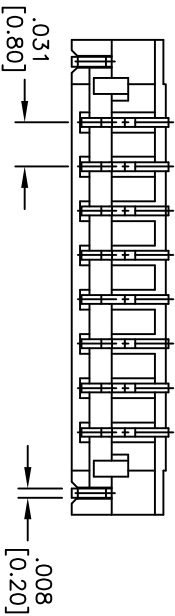
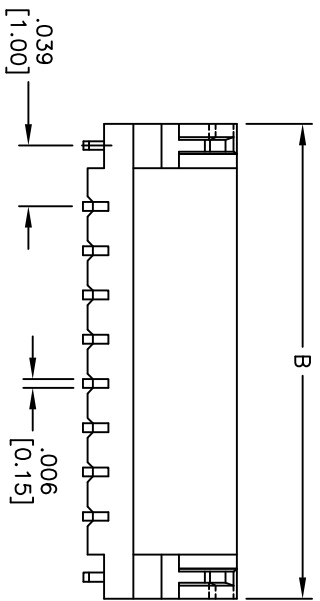


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REDRAWN	8/20/09	
B		REVISED SHAPE	3/21/13	

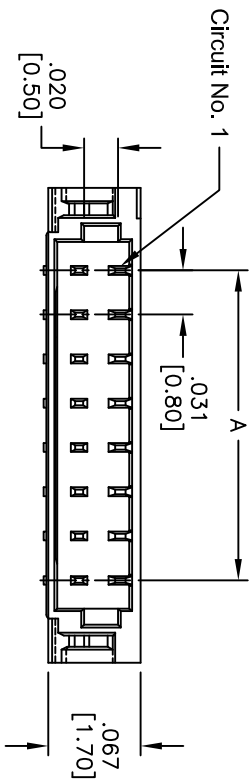

SPECIFICATIONS:

- Material: Polyamide, rated UL 94V-0
- Insulator color: Black
- Contacts: Copper Alloy
- Solder Tab: Brass
- Plating: Tin plated over Copper underplate overall
- Electrical:
 - Voltage rating: 250V AC/DC
 - Current rating: 0.5A AC/DC (32 Awg wire) 0.2A AC/DC (36 Awg wire)
 - Contact resistance: 20 mohms max
 - Insulation resistance: 100MΩ min
 - Dielectric withstanding voltage: 200V AC for 1 minute
 - Temperature Rating: Operating temperature: -25°C to +85°C
 - Environmental: Lead free, RoHS compliant

PACKAGED ON TAPE & REEL
 Positions: 02 thru 17, 20, 22
 A = .031 [0.80] x No. of Spaces
 B = .031 [0.80] x No. of Spaces + .118 [3.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE	SIZE	PART NO.	REV.
DRAWN	BW	01/17/07	X	08SH-A-XX-TS-SMT	B
CHECKED					
APPROVED					

REF: S00015T SCALE: NTS SHEET 1 OF 1

