

Weight

14 lbs

Model

CC600F

## CC600F TYPE 12 COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL

Rating @ 20°C ∆T BTU / hr

3,300


Amps Current Draw at 115 volts AC

0.6

Fan <u>Size</u> 2 x 6"


Dimensions-Inches (H x W x D) 30 x 8-3/4 x 4

Efficiency: 49.4 Watts / °C  $\Delta$ T based on average internal cabinet temperature.

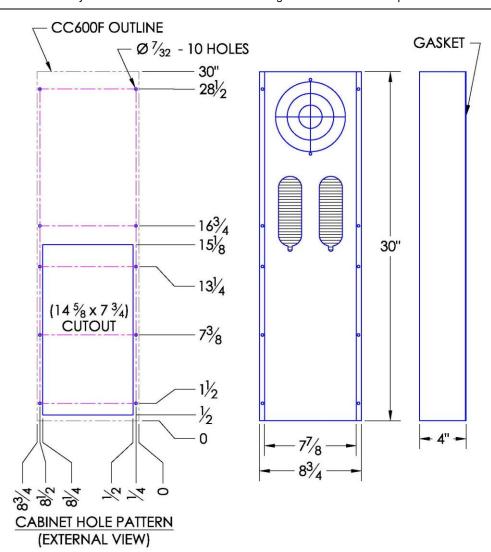







## **SPECIFICATIONS**

- 1. UL Listed for TYPE 12 environments.
- 2. CC600F Rated cooling: 988 Watts at 20°C ΔT (49.4W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- 3. Designed for surface mounting on outside of cabinet.
- 4. Housing is aluminum (color is black). Stainless steel is available.
- 5. Equipped with mounting gasket to maintain air tight seal.
- 6. Available with AC (115 & 230V) and DC (12, 24, & 48) fans. DC version includes junction box, consult website.
- 7. Vertical and horizontal mounting ok.
- 8. Optional: inlet air-filter kit available upon request.
- 9. For design, quote, and sizing assistance: call (866) 936-6736.







UL File #SA9567 Proudly m

1010 O'Brien Drive Menlo Park, CA 94025 650.322.9500 norenproducts.com

**CC600F TYPE 12** 

CCS-PBD-7.2.2-883349-B