


RoHS COMPLIANT

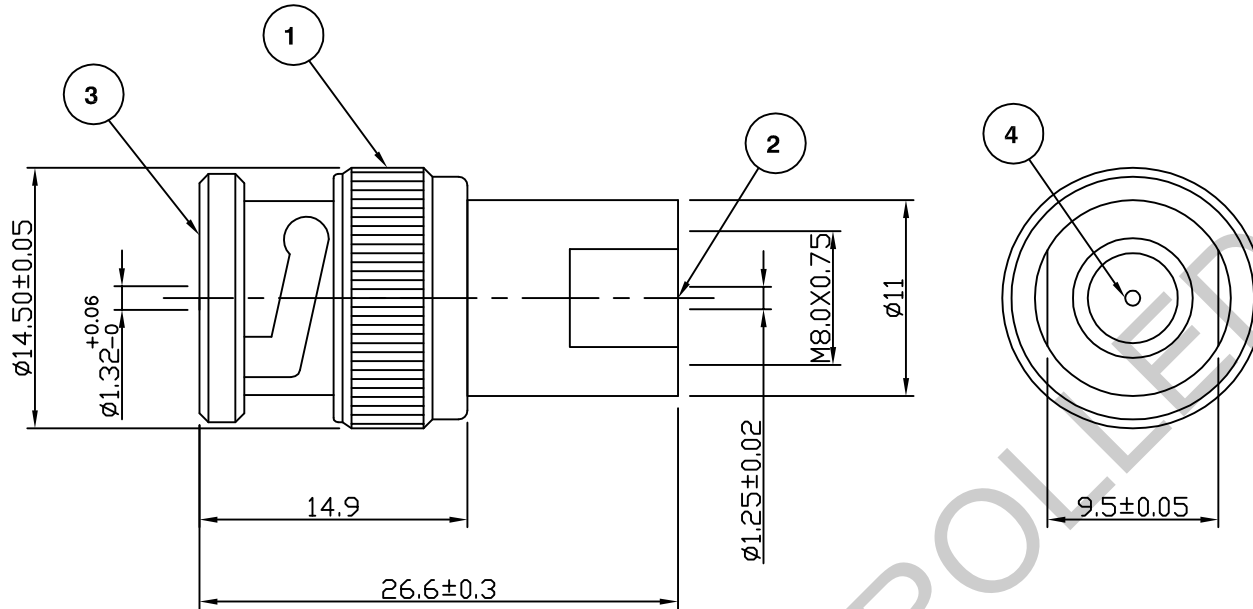

**Electrical Characteristics**

Nominal Impedance: 50 ohms  
 Frequency Range: DC to 2 GHz

**Mechanical Characteristics**

Mating Cycles: 500 cycles minimum

**Environmental Characteristics**

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Body Brass, nickel plated
2	Dielectric Polypropylene
3	Dielectric POM
4	Contact Brass, gold plated

CAD Issue	SN	2	03 Oct 02
First Issue	SN	1	10 May 01
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions  
 7-13 Russell Way,  
 Widford Industrial Estate,  
 Chelmsford, Essex,  
 CM1 3AA, UK.  
 Tel: +44 (0) 1245 359515  
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:  
 ± 0.2mm unless  
 otherwise stated

DRAWN BY:

S Nash

CHECKED BY:

P Couzens

APPROVED BY:

P Couzens

DATE:

03 Oct 02

TITLE:

**BNC Plug to FME Plug**

PART NUMBER:

**VA602**

PAGE: 1 of 1