


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00444	Connector, dc plug, 4.75x1.7xL18.0 mm, molding style, spring contacts, white insulators	1	
2	30-00405	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A, white	1	
3	24-00008	Overmold, PVC, white	1	

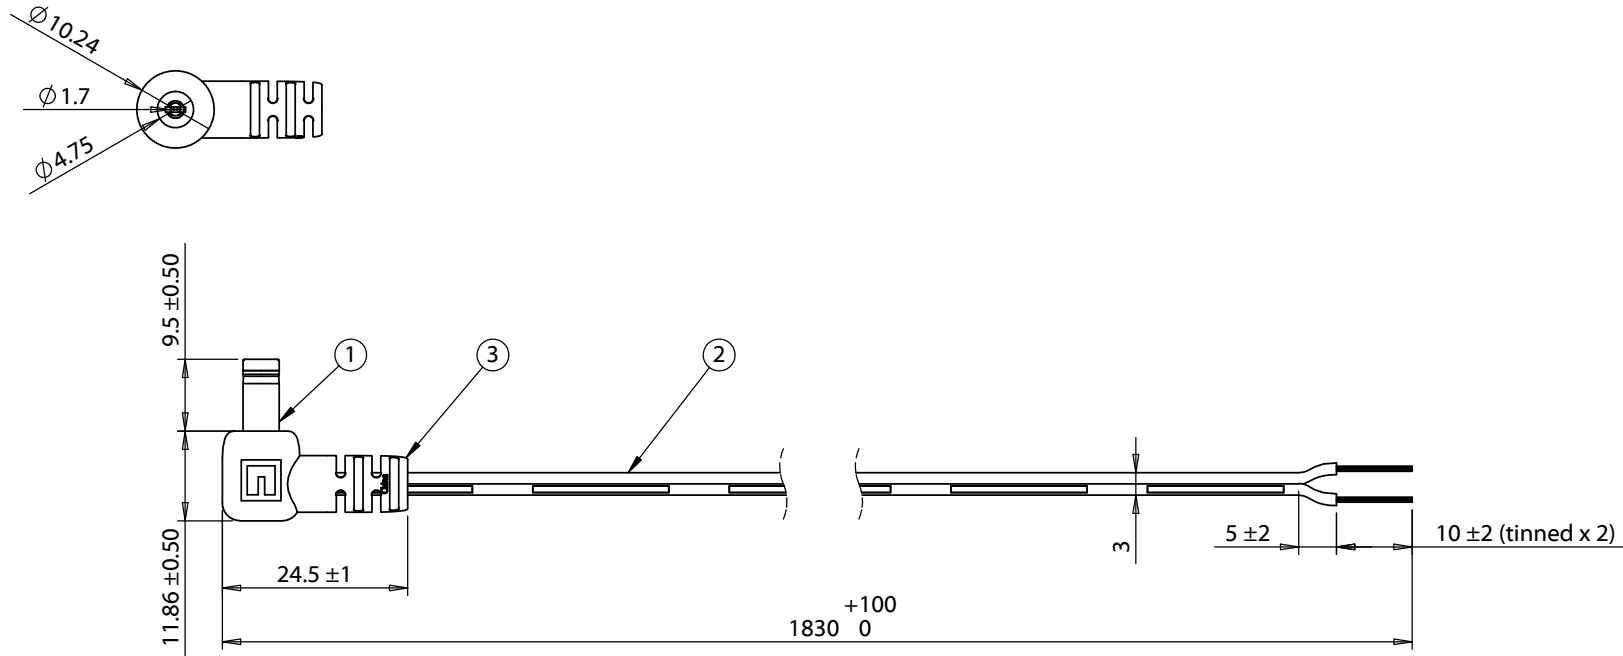

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

4 A, 12 Vdc

Wiring Diagram	
50-00544	wire color
center	white with stripe
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	11/3/2014	Initial release	GL 2016.06.15 14:43:24 -07'00"	RoHS compliant	
			Verified:	Function test: no open, no short circuit, no intermittent	
			LA Digitally signed by L.A. DN: cn=L.A., ou=Tensility, ou=Engineering, email=L.A@Tensility.com, c=US Date: 2016.06.23 15:02:04 -07'00"	Description:	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 1830 mm, 4.75x1.7x9.5 mm 90° 50-00444 plug to stripped tinned, 24 AWG, 30-00405 wire, white	
				Size: Part number:	
				A 10-01250	Scale: 1:2
					Sheet 1 of 1