


APHC-07I04-S

Peltier cooler module

Data sheet

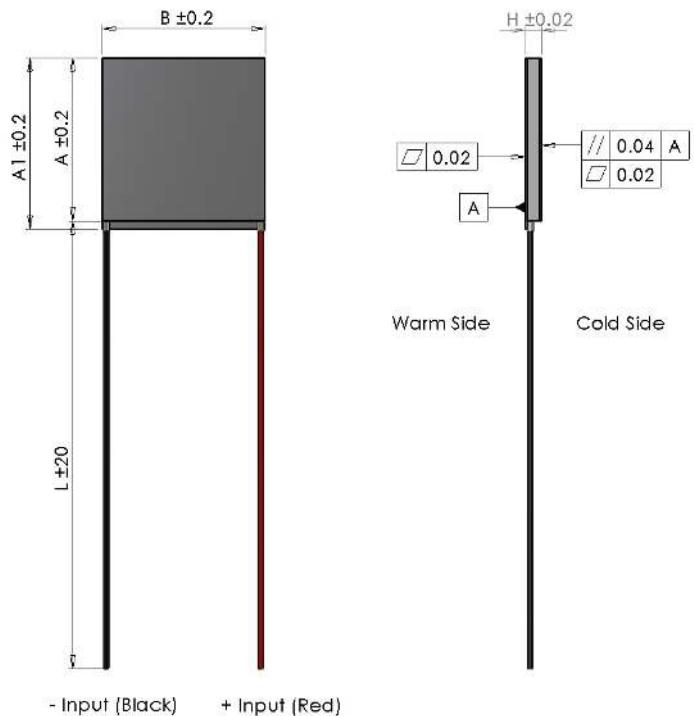

I _{max}	[A]	3.7
V _{max}	[Vdc]	8.2
P _c max	[W]	20
ACR	[Ω]	1.8
ΔT _{max}	[°C]	65
A	[mm]	23.5
A _l	[mm]	23.5
B	[mm]	28
H	[mm]	3.33
L	[mm]	100
Wire	AWG	20

- (At hot side temperature $T_h = 27^\circ\text{C} / 300\text{K}$, under dry N_2)
- P_c max = Cooling power at $\Delta T = 0$ and $I = I_{max}$
- ΔT_{max} = Temperature difference at $I = I_{max}$ and $P_c = 0$
- Max hot side temperature $T_h = 200^\circ\text{C}$ for best long term performance
- Max mounting pressure: 1.5MPa
- Wires: UL-style 1569, 105°C (Unstripped)

Features


- RoHS and Reach 161 compliant
- Solid-state reliability
- Built with high temperature solder with the ability to withstand <200°C assembly processing temperatures for short periods of time
- High integrity nickel diffusion barriers on elements
- High strength for rugged environments
- Porched style for enhanced leadwire strength
- Sealed & lapped for multi-module applications



APHC-07I04-S

Peltier cooler module


Data sheet - At hot side temperature 25°C

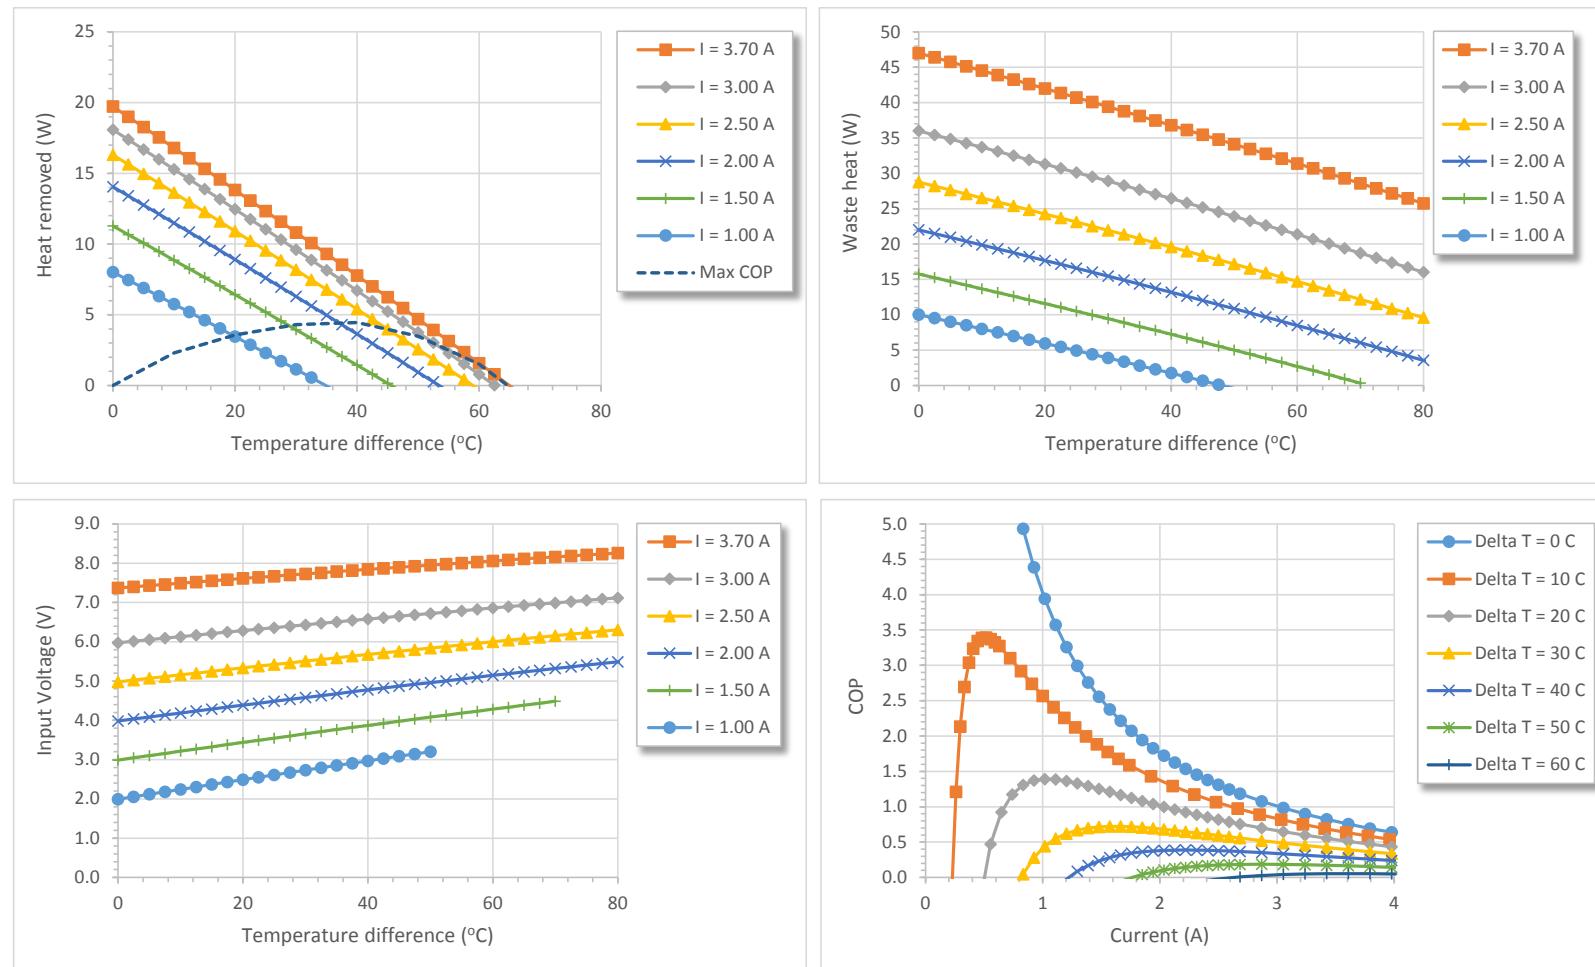

APHC-07I04-S

Peltier cooler module

Data sheet - At hot side temperature 50°C

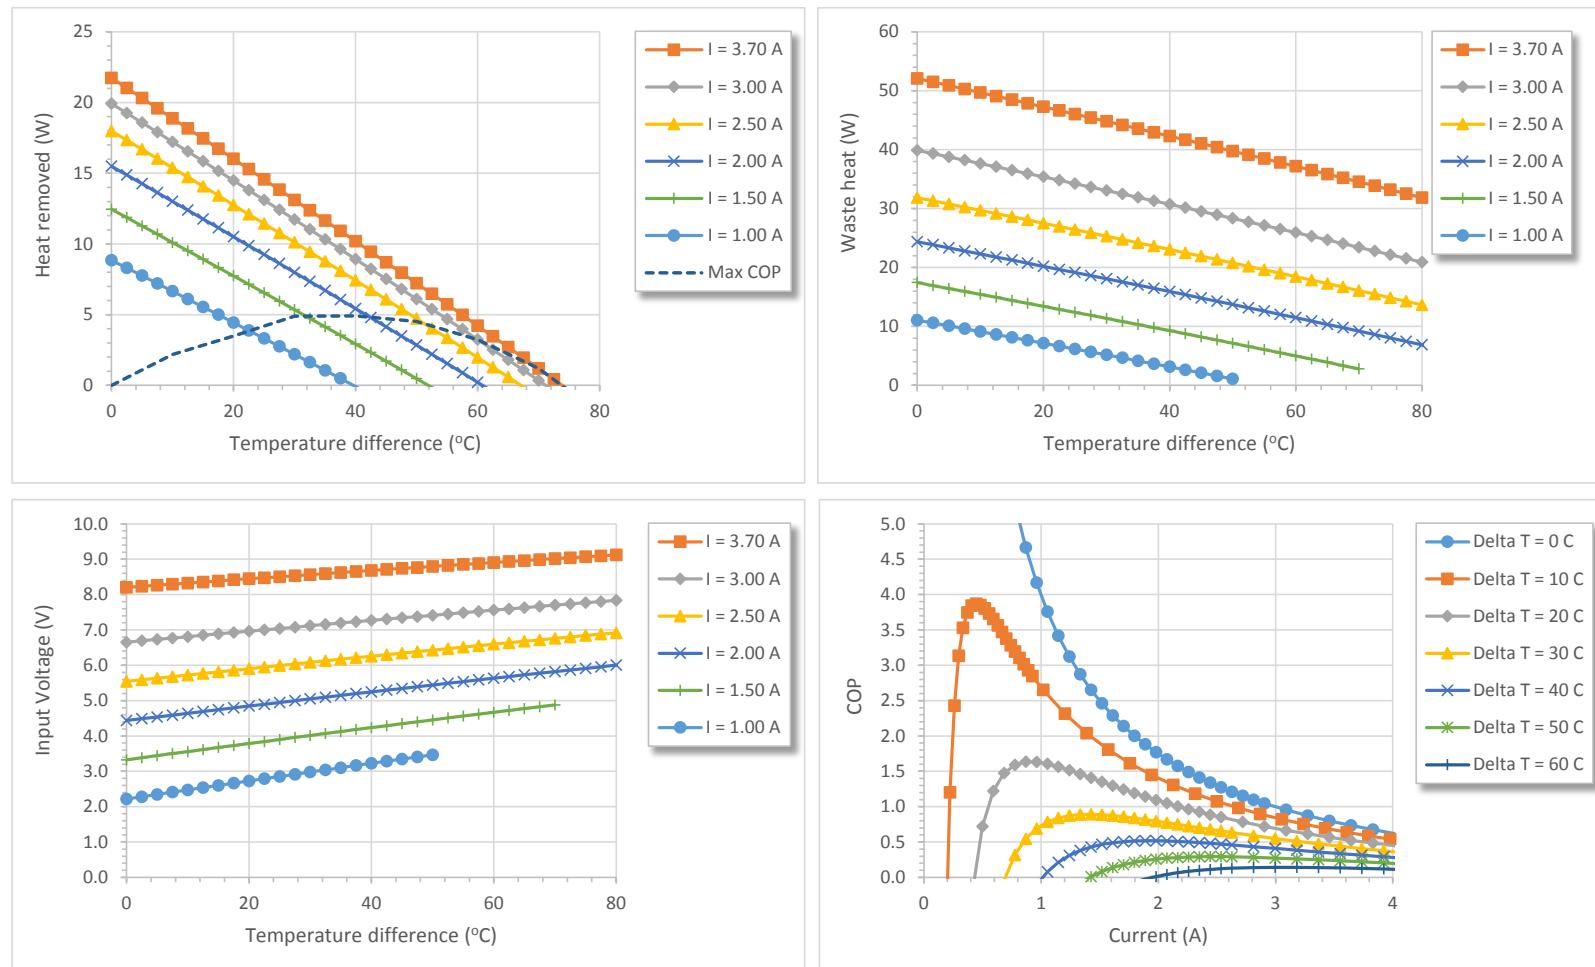

APHC-07I04-S

Peltier cooler module

Data sheet - At hot side temperature 75°C

