



used for: D-SUB

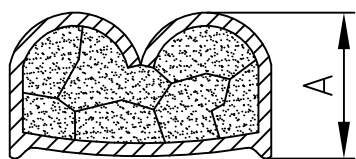


(b)

Wire size AWG	Crimp height A
24	0,68 - 0,86
22	0,68 - 0,86
20	0,68 - 0,86

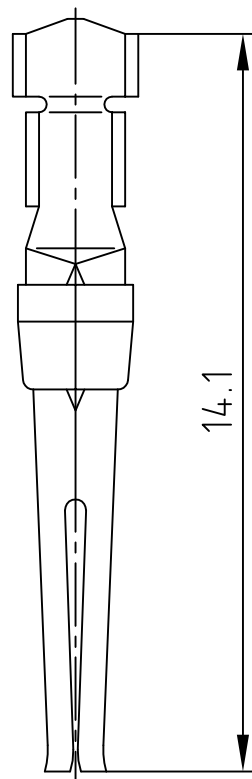

STRIPPING DIMENSIONS

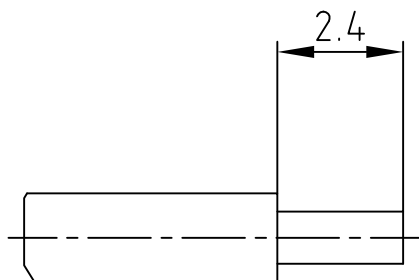

TECHNICAL DATA:

Material Stamped Contacts: Phosphor Bronze

(c) Finish: Gold Flash over Nickel in the Contact Area

Temperature Range: -55°C to +125°C


Rated Current: 7.5A

Contact Resistance: <= 10mOhm

Crimping: Use Crimp Tool 360X10079X

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
rev.	description	date	name	2005	date	
1 x c	Ä 4116	26.09.2011	Lehmen.	d-old		
2 x b	Ä 2197	01.04.2005	HS			
a	Original					



scale:	5:1
material:	SEE NOTES
title:	SOCKET CONTACT CRIMP (b) AWG 24-20
dwg no:	16K2A405A
part no:	162A11849X
	DIN-A 4 sh: 1/1