





ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00403	Connector, 4C stereo plug, 3.5xL20.7 mm, brass, nickel plated, white, molding style	1	
2	30-00181	Wire, 4C BC, 28 AWG, 300V, 80°C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00028	Overmold, PVC	1	white

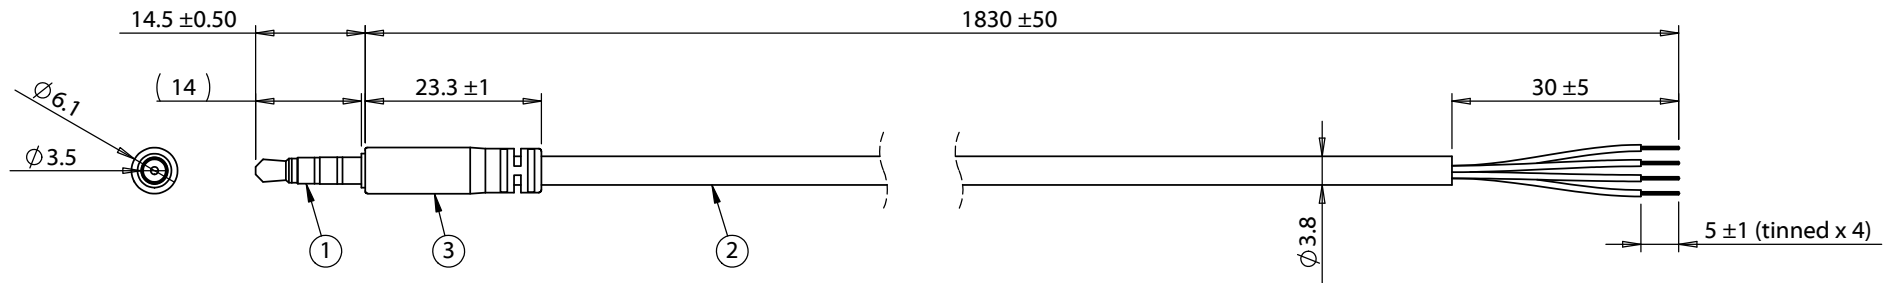

Wiring Diagram	
50-00403	wire color
A	red
B	white
C	green
D	black

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared: GL <small>Digitally signed by GL Date: 2016.10.28 15:39:05 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	4/14/2010	Initial release	Verified: DN <small>Digitally signed by DN Date: 2016.10.28 15:40:47 -07'00'</small>	RoHS compliant	
A1	9/6/2011	Updated specification	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
A2	3/28/2012	Updated wire part number		Description:	
A3	10/8/2014	Updated connector		Cable, 1830 mm, 3.5 mm 4C 50-00403 slim audio plug to 5 mm tinned, 28 AWG, 30-00181, shielded, white	
A4	10/19/2016	Corrected overmold dimensions		Part number: 10-00332	
			Scale: 1:1	 	Sheet 1 of 1