
Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin			
Wire Size	8 AWG			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	B STR CU LCC8-38DWH		
Wire Strip Length	3/4 in.			
Stud Size	3/8 in.	.36±.04 1.00±.02		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	Beve		
UL Temperature Rating	90° C			
C.S.A Certified Wire Connector	Yes			
Panduit Color Code on Barrel	RED	Wire inspection window——		
Panduit Die Index No. on Barrel	P21	.05±.01		
Alternate Industry Die Index No. () on Barrel	N/A			





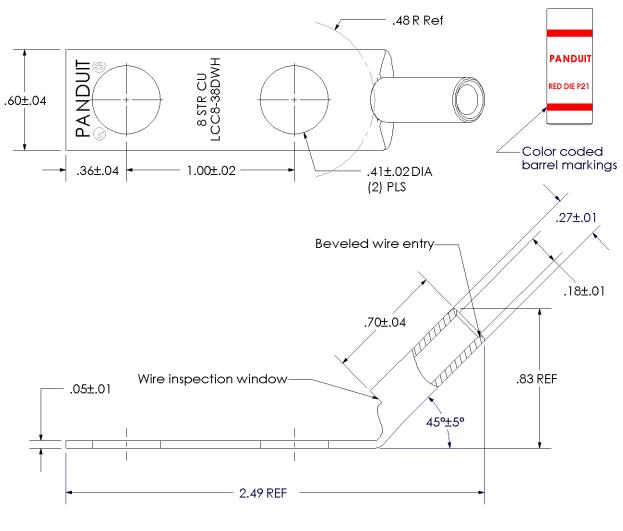

CERTIFIED

LISTED Wire Connector

						CORP. TINLEY PARK, ILLINOIS
						LCC8-38DWH-L
00	7/02	SAB	DRL	RELEASED	10341	Copper Lug - Two-Hole, Long Barrel with Window, 45° Angle Tongue
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC8-38DWH-CUST