

AMPLIMITE | AMPLIMITE 0.50 Series

TE Internal #: 749611-8

IDC D-Sub Connectors, Receptacle, 30 – 28 AWG Solid Wire Size, .

05 – .1 mm² Solid Wire Size, Cable-to-Panel, 80 Position,

AMPLIMITE 0.50 Series

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > IDC D-Sub Connectors > IDC D-Sub: Receptacle Assembly, Panel Mount, Signal, 1.27 mm



Connector & Housing Type: Receptacle

Solid Wire Size: .05 – .1 mm²

Shielded: No

Connector System: Cable-to-Panel

All IDC D-Sub: Receptacle Assembly, Panel Mount, Signal, 1.27 mm (13)

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Cable-to-Panel
Connector Product Type	Connector Assembly
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	80
Number of Rows	2
Compatible With Wire & Cable Type	Ribbon Cable, Round Jacketed Cable

Body Features

Cover Material	Thermoplastic
Ribbon Cable Centerline Spacing	.64 mm[.025 in]
Shell Plating Material	Nickel over Copper
Primary Product Color	Black

Contact Features

Wire Contact Termination Area Plating Material	Tin-Lead
	30 µin
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel



Contact Underplating Material	Nickel, Palladium Nickel
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1 A
Termination Features	
Termination Cover Method	Assembled
Termination Cover	Without
Termination Cover Type	Non Lacing
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Mounting Feature Plating Material	Nickel over Copper
Mounting Feature Material	Zinc
Mating Retention	Without
Mating Retention Type	Rails
Thread Size	2-56
Connector Mounting Type	Panel Mount
Housing Features	
Shell Material	Steel
Housing Material	Thermoplastic
Centerline (Pitch)	1.27 mm[.05 in]
Dimensions	
Compatible Insulation Diameter (Max)	.91 mm
Compatible Insulation Diameter Range	.74 – .89 mm[.029 – .036 in]
Solid Wire Size	.05 – .1 mm²
Wire Size	$.0509 \text{ mm}^2$
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Shielded	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0

Packaging Features



Packaging Quantity	7
Packaging Method	Box & Tube, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | AMPLIMITE 0.50 Series

D-Sub Covers(20)












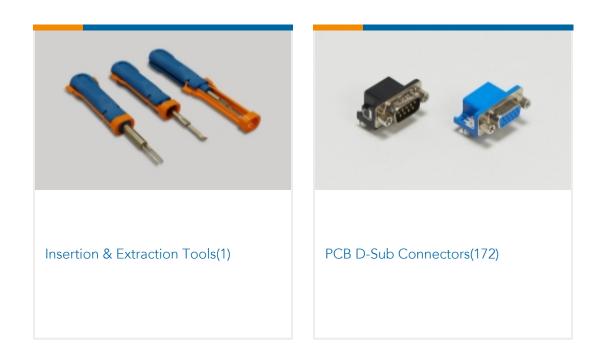

Customers Also Bought



Documents

Product Drawings

80 50SR PANEL MOUNT RCPT

English

CAD Files

Customer View Model

ENG_CVM_749611-8_T.3d_igs.zip

English

Customer View Model

ENG_CVM_749611-8_T.3d_stp.zip

English

Customer View Model

ENG_CVM_749611-8_T.2d_dxf.zip

English

3D PDF

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_749611-8_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_749611-8_N.3d_igs.zip

English

Customer View Model

IDC D-Sub Connectors, Receptacle, 30-28 AWG Solid Wire Size, .05-.1 mm 2 Solid Wire Size, Cable-to-Panel, 80 Position, AMPLIMITE 0.50 Series



ENG_CVM_CVM_749611-8_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Agency Approvals

UL

English