



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-13	NEMA 5-15P	1	black overmold
2	TLY-18	C13 female	1	black overmold
3	30-00244	Wire, 3C, 18 AWG, UL SVT, 300V, 105C, 6.3 mm, VW-1, PVC	1	
4	Label	Adhesive flag, 15x100 mm	1	white with black font

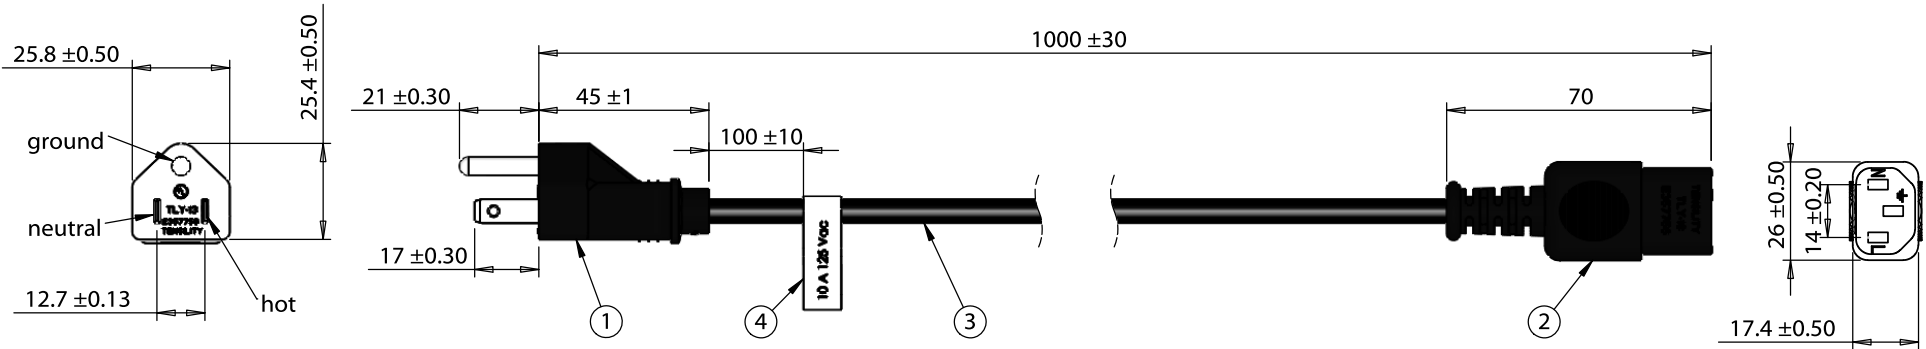

**Notes:**  
Electrical requirements: 10 A at 125 Vac

Wiring Diagram		
TLY-13	wire color	TLY-18
hot	black	line
neutral	white	neutral
ground	green	ground

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	12/20/2012	Initial release	JP <small>Digitally signed by JP Date: 2018.08.21 14:32:17 -07'00'</small>			RoHS compliant
			Verified:	Function test: no open, no short circuit, no intermittent		
			LA <small>Digitally signed by LA Date: 2018.08.21 14:45:39 -07'00'</small>	Description:	Size: A	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Ac cord, 1000 mm, U.S, NEMA 5-15P plug, TLY-13 to C13, TLY-18, 18 AWG, SVT wire, 30-00244	Part number: 11-00022	
					Scale: 1:2	
						Sheet 1 of 1

5

4

3

2

1