


spec ref *		dr <b>Terran Huang</b>		2010/07/09		projection		size A4		scale 1:10	
tolerance std		eng <b>Nirmal Sam-MB</b>		2021/12/27						ecn no <b>ELX-I-43418-1</b>	
ISO 406 ISO 1101		chr -		-						rel level <b>Released</b>	
surface		appr <b>Kuriakose, San</b>		2021/12/28		product family <b>METRAL</b>		rev		sheet 1 of 12	
ISO 1302		linear		0.X ±0.3		<b>Amphenol FCI</b> METRAL SIGNAL HEADER 4 MOD, 4 ROW PRESS-FIT		dwg no <b>70234</b>		AN	
angular		0° ±2°		cat. no. *				Product - Customer Drw			
		amphenol-icc.com									

Creo F:14:ELX-IC:ACC,REV F,2020-12-21

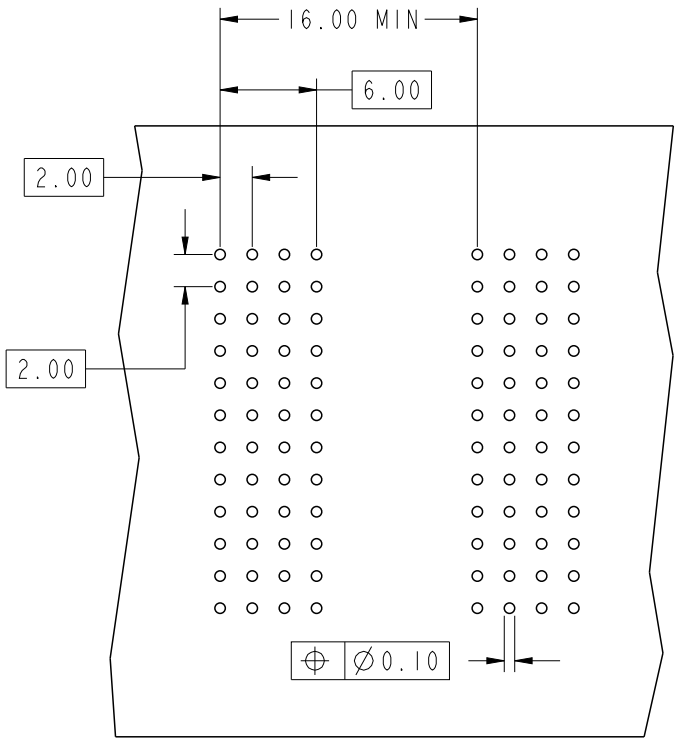

REQUIRED PC BOARD LAYOUT  
COMPONENT SIDE

SEE PRINT 58351 FOR  
ADDITIONAL PCB INFORMATION

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
9	5.00	17.00
10	5.75	17.00
11	6.50	17.00
12	7.25	17.00
13	8.25	4.30
14	8.25	13.60
15	8.25	17.00
19	8.00	4.30
20	8.00	13.60
21	8.00	17.00
22	6.50	3.25
23	8.00	3.25



spec ref *		dr	Terran Huang	2010/07/09	projection 	MM 	size	A4	scale	21:10
tolerance std ISO 406 ISO 1101		eng	Nirmal Sam-MB	2021/12/27			ecn no	ELX-I-43418-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level	Released		
surface	3.200	appr	Kuriakose, San	2021/12/28	product family	METRAL	rev			
ISO 1302	linear	0.X	±0.3	Amphenol FCi	title	METRAL SIGNAL HEADER	dwg no	70234	rev	AN
		0.XX	±0.13							
	0.XXX	±0.051								
	angular	0°	±2°	amphenol-icc.com	cat. no.	-	Product - Customer Drw	sheet 2 of 12		

Creo F:14:ELX-IC:ACC,REV F,2020-12-21

























METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
70234-X100LF	D	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	C	3	3	1	3	3	1	3	3	1	3	3	1	3	3	1	3	3	1	3	3	1	3	3
	B	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	A	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
70234-X102LF	D	22	22	23	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22
	C	22	22	23	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22
	B	22	22	23	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22
	A	22	22	23	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
70234-X101LF	D	3	3	19	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	C	3	3	19	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	B	3	3	19	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	A	3	3	19	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3

NOTES:

- FOR DIM A AND B REFER SHEET-2.
- BODY MATERIAL: LCP- UL 94-V0.
- PIN MATERIAL: COPPER ALLOY.
- FOR PLATING PERFORMANCE REFER DRAWING #10159408
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES. IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER. EXAMPLE: XXXXX-XXXPLF
- PRODUCT SPECIFICATION GS-12-180  
APPLICATION SPECIFICATION BUS-20-073
- AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
- THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. Au CONTACT SURFACE OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.
- A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref	*	dr	Terran Huang	2010/07/09	projection		size	A4	scale	1:10
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Nirmal Sam-MB	2021/12/27			ecn no	ELX-I-43418-1		
ISO 406 ISO 1101		chr	-	-			product family	METRAL		rel level
surface	3.200	appr	Kuriakose, San	2021/12/28	product family	METRAL		rel level	Released	
ISO 1302	linear	0.X	±0.3			METRAL SIGNAL HEADER			dwg no 70234	rev AN
		0.XX	±0.13			4 MOD, 4 ROW PRESS-FIT				
	angular	0°	±2°			cat. no.	-			