


HC-B 16-TFL-60/O1PG21S

Order No.: 1673795

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1673795>

Sleeve housing, for single locking latch, height 60 mm, without screw connection, 1x Pg21, lateral cable entry

Commercial data

| | |
|----------------|---|
| GTIN (EAN) |  4 017918 149680 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|--|
| Note | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design | B16 |
| Height | 60 mm |
| Width | 43 mm |
| Length | 94 mm |

| | |
|---------------------------------|--------------------------|
| Housing type | Sleeve housings |
| Locking type | for single locking latch |
| Cable exit | Lateral |
| Type of the screw connection | 1x Pg21 |
| Pg screw connection | None |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

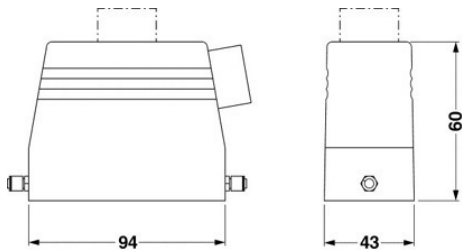

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;