


### Specifications

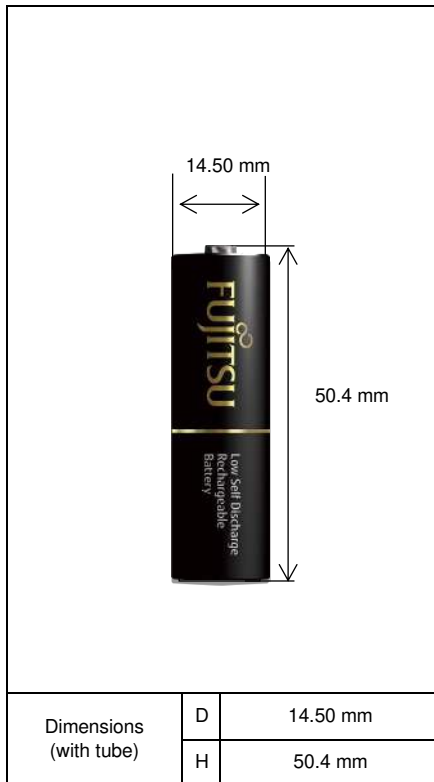

|   |                                |                                      |
|---|--------------------------------|--------------------------------------|
| Type : Nickel-Metal Hydride Battery                             |                                | Size : AA Consumer Type              |
| Capacity <sup>1)</sup>  | Typical                        | 2570mAh                              |
|   | Minimum                        | 2450mAh                              |
| Nominal Voltage   |                                | 1.2V                                 |
| Charging Current x Time   | Fast Charge <sup>2)</sup>      | 2500mA × 1.1h                        |
| Ambient Temp.   | Charge Condition               | Fast Charge <sup>2)</sup> 0°C - 40°C |
|   | Discharge Condition 0°C - 50°C |                                      |
|   | Storage Condition              | Less than 90days                     |
| Less than 1year   |                                | -20°C - 30°C                         |
| Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V) |                                | Approx. 25mΩ (at 1000Hz)             |
| Weight <sup>4)</sup>  |                                | Approx.30g                           |
| Size <sup>4)</sup> : (Diameter) x (Height)                      |                                | 14.5(D) x 50.4(H) mm                 |

1)Single cell capacity under the following condition.

Charge : 250mA×16h, Discharge : 500mA(E.V.=1.0V) at 20°C


2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition.

4)With tube.

### Typical Characteristics

#### Charge

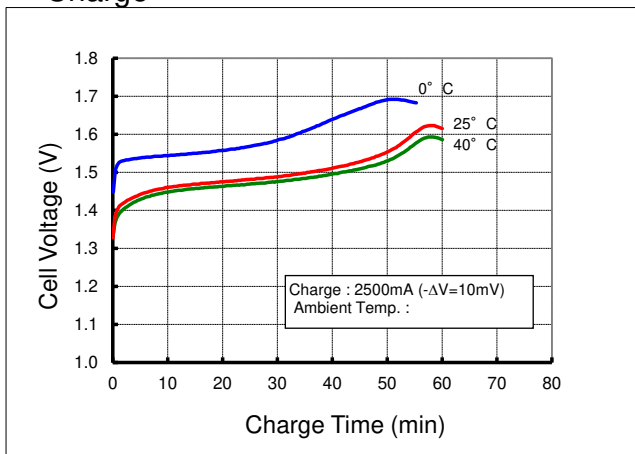

#### Discharge

