



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/06/14	A	Updated to ROHS compliant	DL	BS	
03/15/23	B	Wire gauge was 24AWG	DL	BS	

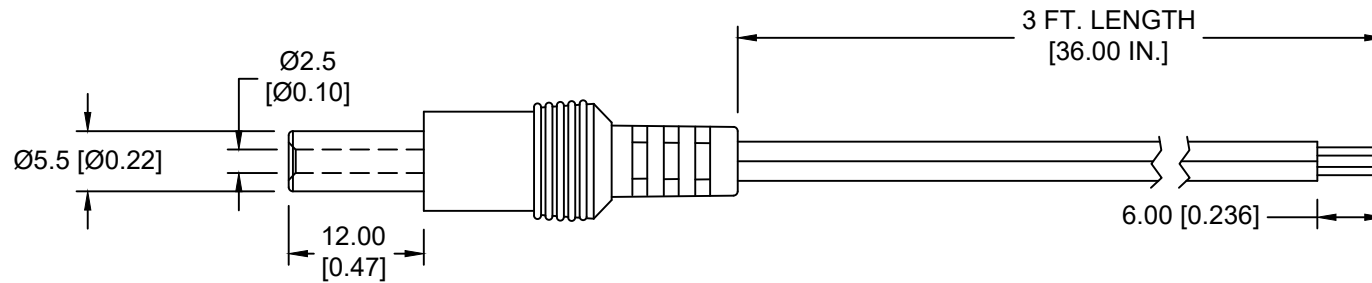

NOTES:

Housing: Black
 Cord: UL2468, 300V, 80°C, 22AWG
 Passes UL flame test VW-1
 Center is positive contact
 DC Molded plug: 2.5mm X 5.5mm

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		decimal $\pm .10$ (.004)	Approved By D.L.
Fractional $\pm .8$ (.030)	Title 2.5mm DC MOLDED PLUG WITH 3' WIRE LEADS		
Angular $\pm 3^\circ$	Date 03/15/2023	Drawing Number 172-4205	