
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

	REVISION									
REV	DESCRIPTION	DATE	APPROVED							
A	INITIAL RELEASE, RFS. 25116, DH	08/05/13	HM							
В	CHANGE TOLERANCE TO +/-30 mm & RATING TO 2.5A/250V, RFS. 25131, DH	08/12/13	HM							
C	ADD HANKED DRAWING, RFS. 26176, JS	01/19/16	HM							

'A'

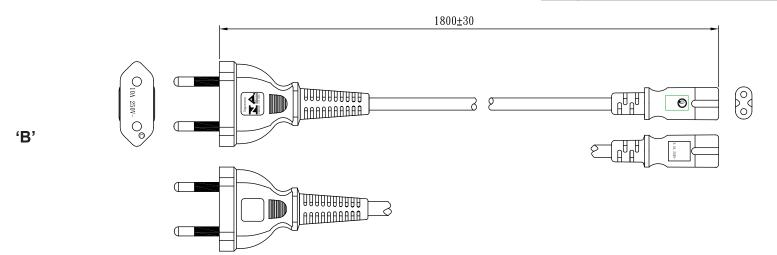

GENERAL SPECIFICATIONS:

RATING: 2.5A / 250 V AC

CABLE TYPE / SIZE: H03VVH2-F, 2 X 0.75 mm², 2C

TEMPERATURE RATING: 70° C
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 1800±30 mm

CABLE OUTER DIAMETER: $3.5 \times 5.7 \pm 0.15 \text{ mm}^2$

END 'A' TERMINATION: IEC 320/C7
END 'B' TERMINATION: BRAZILIAN
APPROVALS PLUG: INMETRO

APPROVALS CONNECTOR: UL

NOTES:

Contents of this document


prior notice

are subject to change without

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

PACKING:

HANKED MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



RELEASED

By N.Frost at 1:51 pm, Jan 19, 2016



Globtek Inc. will not be liable for the

safety and performance of these power

product if unauthorized access and repair

ble UL,CSA or EN Standards for proper

installation instruction.

occurs. End user should consult the applica-



Globtek product are not authorized for use as

mission critical components in life support,

aircraft applications without prior written

approval from the CEO of Globtek Inc.

hazardous environment, nuclear or

	NO. PART NO			REV.	DESCRIPTION				
	TABULATION BLOCK								
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc. 186 Veterans Dr. Nort Tel. 201-784-1000 F:					
	INIT.BY:	ן ווע	DATE: 08/06/13	MILLIMETERS .xx +/- 0.3 .xxx +/013	ANGULAR +/- 1°	DWG TITLE: BRAZILIAN DETACHABLE CORDSET			
	DRAWN:	INI.	DATE: 08/06/13	FSCN No.: G, CC	SIZE A		REV. C		
	APRVD:		DATE: 08/06/13	SCALE: NONE		PART NO: 207B4111M8703(R)	SHEET 1/1		