


1

2

3

4

5

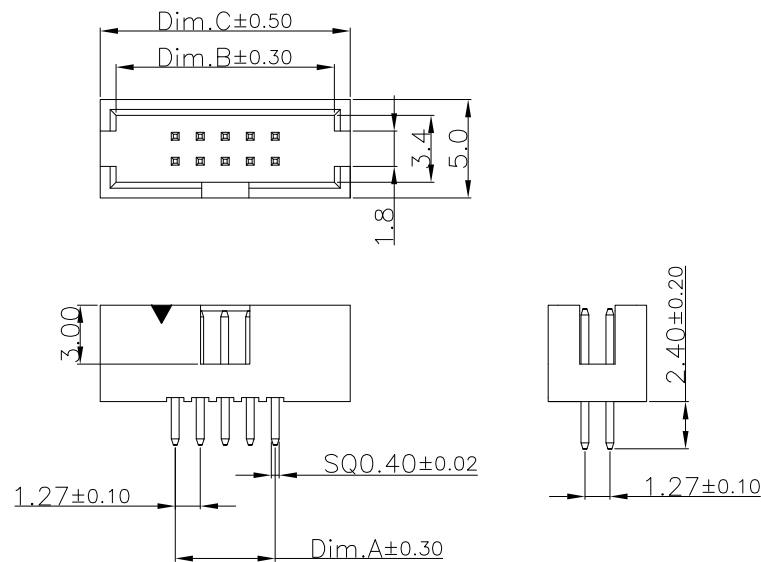


## Specifications:

Current rating:1.0A AC,DC  
 Voltage rating:50V AC, DC  
 Contact tesistance:20m ohm Max  
 Insulation resistance:1,000M ohm Min  
 Withstanding voltage:500V AC/minute  
 Operating Temperature:-40°C ~ +105°C

## Materials:


Insulator:Nylon 9T(UL94V-0)  
 Standard Color:Black  
 Terminal:Brass  
 Finish:Gold Plated




## Dimension Information:

Pin.No	Dim.A	Dim.B	Dim.C	Pin.No	Dim.A	Dim.B	Dim.C
8	3.81	9.83	11.43	30	17.78	23.80	25.40
10	5.08	11.10	12.70	34	20.32	26.34	27.94
12	6.35	12.37	13.97	40	24.13	30.15	31.75
14	7.62	13.64	15.24	44	26.67	32.69	34.29
16	8.89	14.91	16.51	50	30.48	36.50	38.10
20	11.43	17.45	19.05	60	36.83	42.85	44.45
24	13.97	19.99	21.59	68	41.91	47.93	49.53
26	15.24	21.26	22.86				

MATING PART  
3230-XX-0103-00



MATING PART  
3230-XX-0104-00



RoHS Compliant

DRAWN:  
Jamie

GENERAL TOLERANCE:  
.X=±0.25  
.XX=±0.20

**CnC Tech**  
Industrial Cable and Connector Technology

CHECKED:  
Jerry

UNIT: MM

DESCRIPTION:

SIZE

SCALE:1:1

1.27mm Box Header Straight Type

A4

05-FEB-2020

APPROVAL:  
Rory

SHEET: 1 / 1

PART NO:

3221-XX-0100-00


REV

DATE

FILE

BY

PROJECTION:



A

B

C

D