PRODUCT NR.	DIM "A"
88956-X01LF	5.00 REF.
88956-X11LF	3.35 REF.
88956-X20LF	5.76 REF.

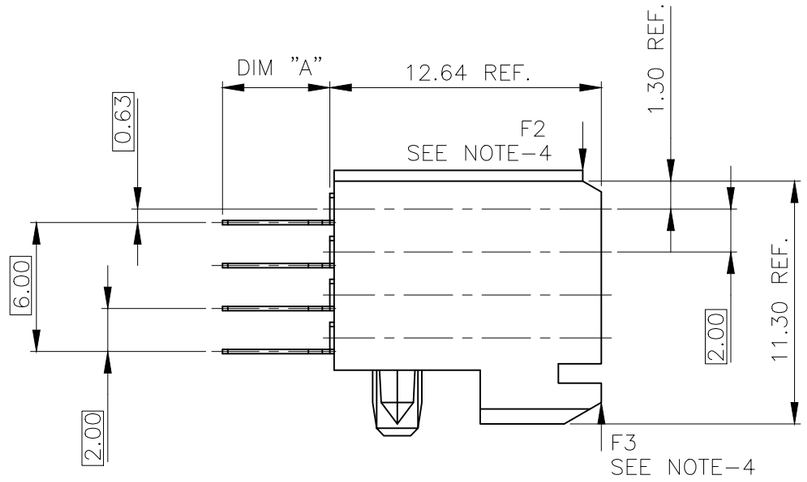

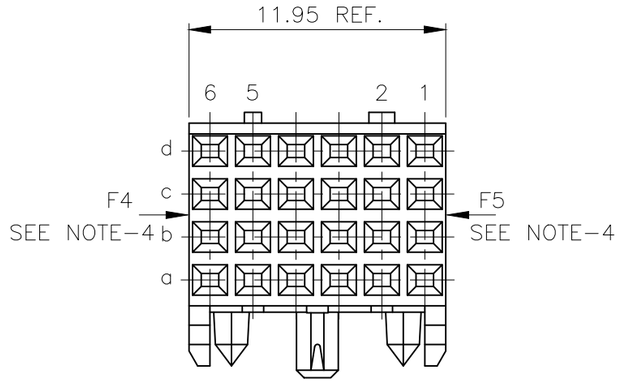

REFER NOTE-2

88956-XYYLF

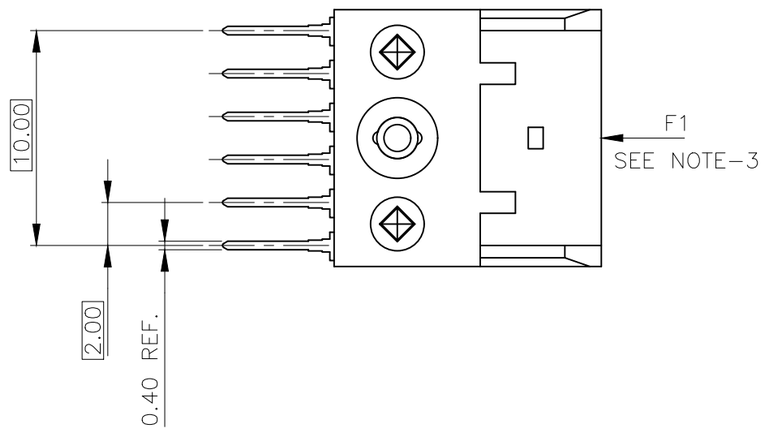

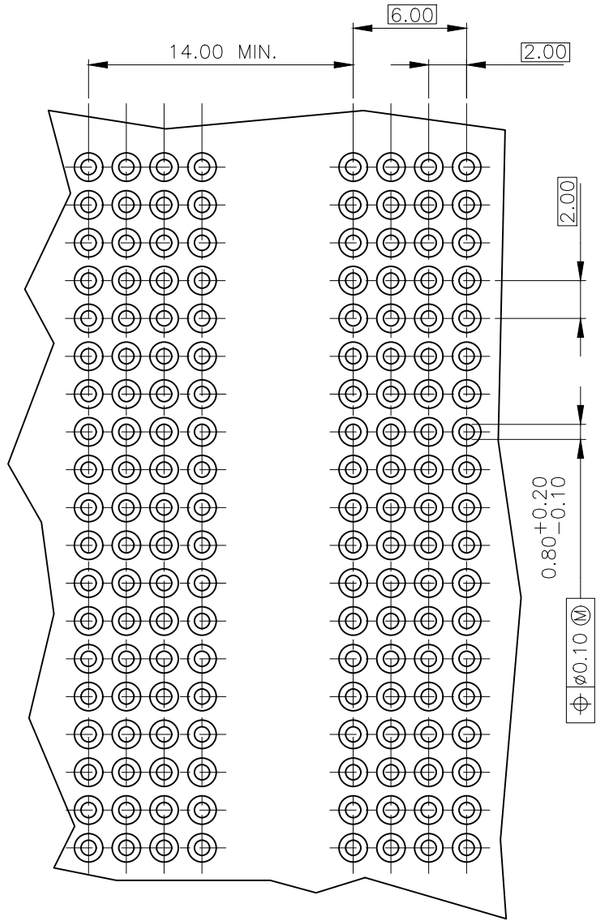

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

NOTES:

1. MATERIAL : BODY : LCP UL94-V0
   : CONTACT : COPPER ALLOY.
2. FOR PLATING PERFORMANCE REFER DRAWING # 10159408 △L
3. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
4. LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
5. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004.
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
8. A △L SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

ltr	ecn no	dr	date
J	DG08-0171	TER	2006-08-26
K	DG09-0068	CENH	2009-06-06
L	ELX-I-38913	MINI	2020-10-23

dr	R RIJKEN	1991-04-23
engr	ARUN	2020-10-23
chr	ALEX BABU	2020-10-23
appd	SANOJ	2020-10-23

mat'l. code

surface ISO 1302 √

tolerance ISO 406 ISO 1101

tolerances unless otherwise specified

angles 0°±2°

linear .X±0.3 / .XX±0.13 / .XXX±0.050

projection

mm

scale —

product family: METRAL

title: STR FEMALE STB
SIGNAL 12MM

dwg no 88956

sheet 1 of 1

size A3

type Product Customer Drawing

sheet index	revision	sheet
	L	1

© 2016 AFCI