




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	REDRAWN ON NEW FORMAT	12/18/14	D.N.
C	UPDATED PLATING	01/19/16	D.N.

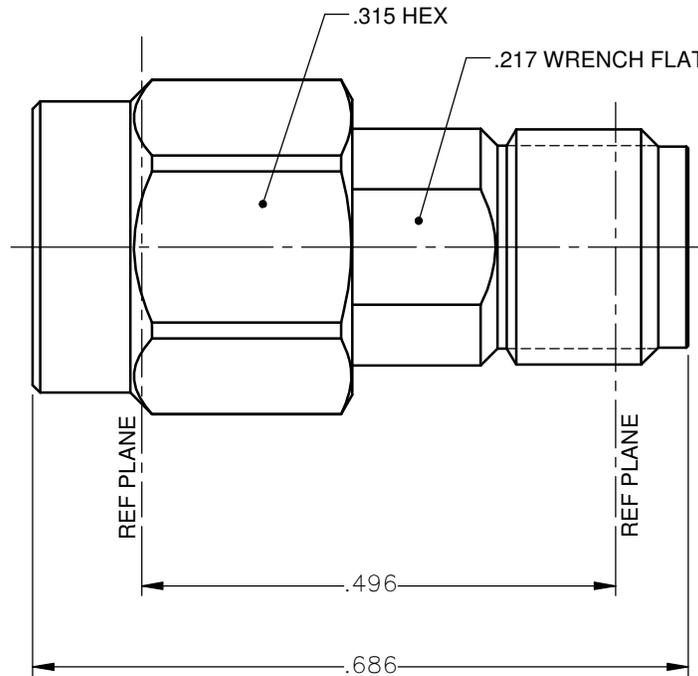

NOTES:

MATERIALS:

1. BODY & COUPLING NUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. CONTACT & RETAINING RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
4. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

1. BODY & COUPLING NUT = GOLD 0.5 $\mu$ m OVER NICKEL 2 $\mu$ m.
2. CONTACT = GOLD 2.5 $\mu$ m OVER NICKEL 2 $\mu$ m.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: M.J.	DATE: 10/08/08	 <b>Property of Radiall</b> This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
	CHKD: D.N.	DATE: 10/08/08		
DECIMAL	ANGLE	APVD: J.M.	DATE: 10/08/08	<b>SMA STRAIGHT PLUG TO JACK ADAPTER</b>
REFERENCE:	MATERIALS & FINISHES: SEE NOTES	SIZE: A	FSCM NO.: 19505	
ORIGINATED: M.J. DATE: 10/08/08		SCALE: 5:1	THIRD ANGLE PROJECTION	REV: C
			SHEET 1 OF 1	

5916-1103-603