


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		K2		REVISED PER ECO-11-005027	11MAR11	RK	HMR

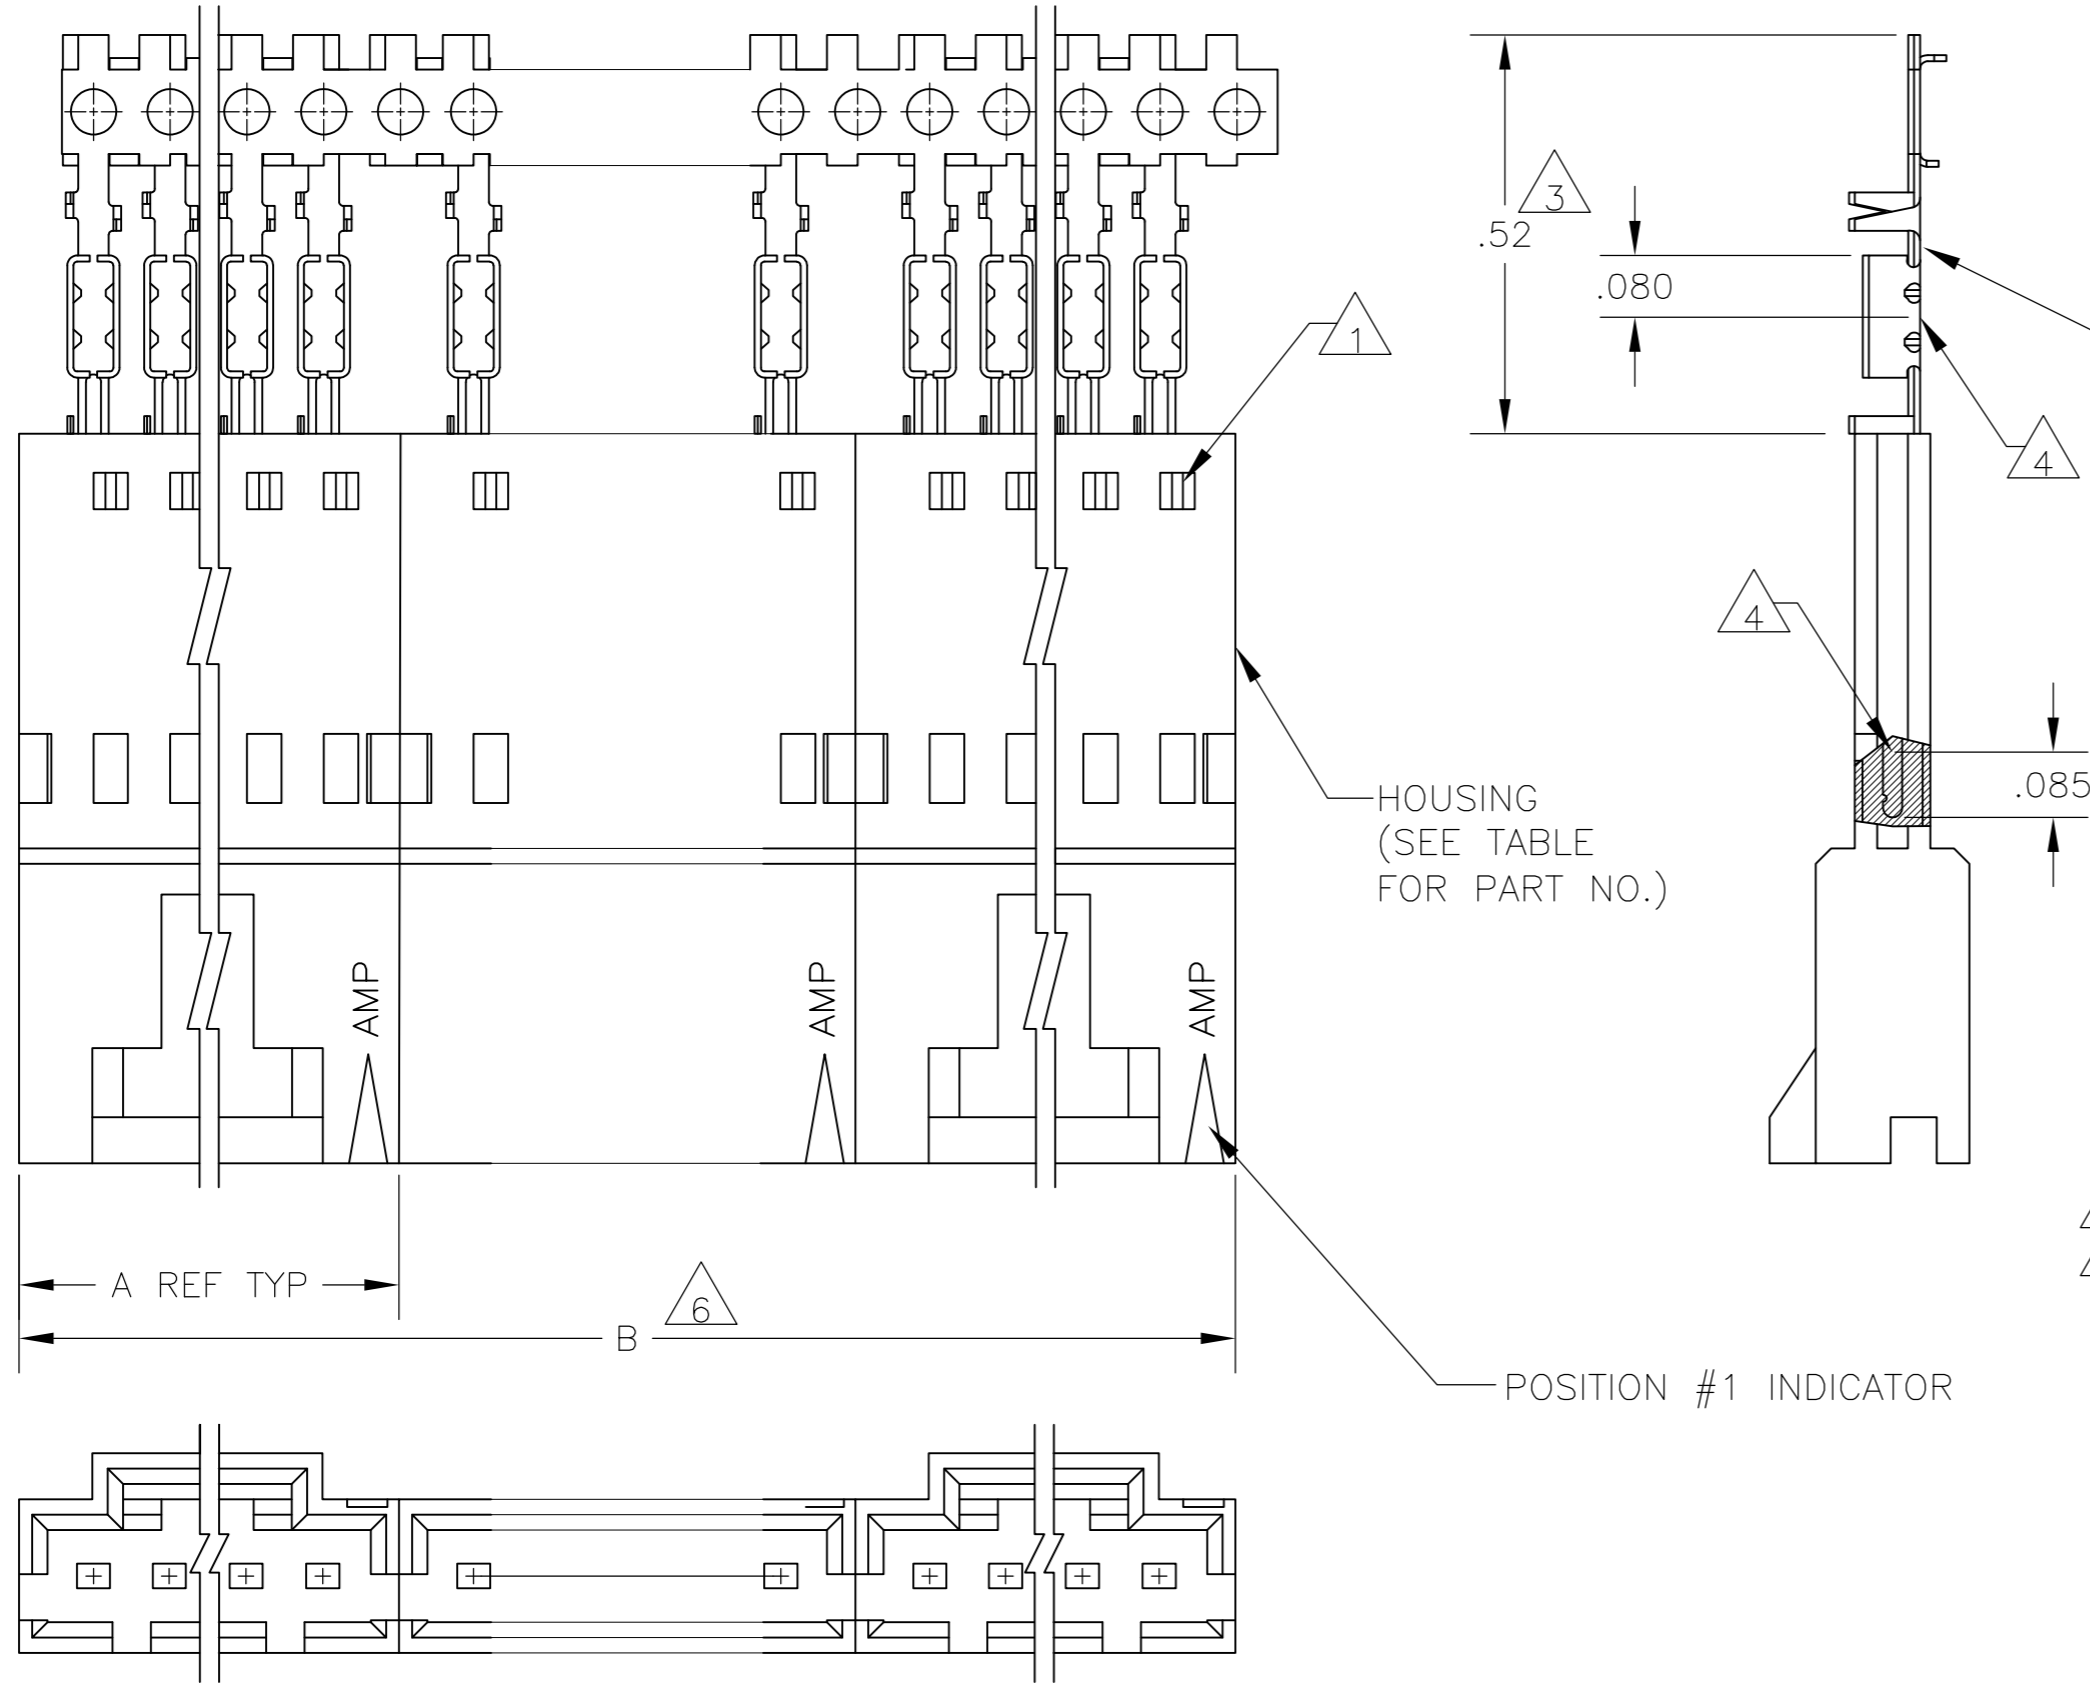

CONTACT IDENTIFICATION LETTER "C" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO.)

POSITION #1 INDICATOR

△9	OBSOLETE	△9	2	2.59	1.295	1-103653-1	12	6-103949-1
△10	OBSOLETE	△9	2	2.39	1.195	1-103653-0	11	6-103949-0
		△9	2	2.19	1.095	103653-9	10	5-103949-9
		△9	2	1.99	.995	103653-8	9	5-103949-8
		△9	2	1.79	.895	103653-7	8	5-103949-7
		△9	3	2.39	.795	103653-6	7	5-103949-6
		△9	2	1.39	.695	103653-5	6	5-103949-5
		△9	4	2.38	.595	103653-4	5	5-103949-4
		△9	4	1.98	.495	103653-3	4	5-103949-3
		△9	5	1.98	.395	103653-2	3	5-103949-2
		△9	8	2.36	.295	103653-1	2	5-103949-1
△10	OBSOLETE	△8	2	2.59	1.295	1-103653-1	12	4-103949-1
△10	OBSOLETE	△8	2	2.39	1.195	1-103653-0	11	4-103949-0
		△8	2	2.19	1.095	103653-9	10	103949-9
		△8	2	1.99	.995	103653-8	9	103949-8
△10	SUPERSEDED BY 5-103949-7	△8	2	1.79	.895	103653-7	8	103949-7
		△8	3	2.39	.795	103653-6	7	103949-6
		△8	2	1.39	.695	103653-5	6	103949-5
		△8	4	2.38	.595	103653-4	5	103949-4
		△8	4	1.98	.495	103653-3	4	103949-3
		△8	5	1.98	.395	103653-2	3	103949-2
		△8	8	2.36	.295	103653-1	2	103949-1
		△6		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- △1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103894
- △6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
PINS: PHOS. BRONZE
- △8 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △9 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN R BROWN 26JUL00	 TE Connectivity
	0 PLC ± -	CHK K WRIGHT 26JUL00	
	1 PLC ± -	APVD K WRIGHT 26JUL00	
	2 PLC ± .02	NAME SHROUDED PIN ASSY, AMPMOW MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM	
MATERIAL	FINISH SEE TABLE	APPLICATION SPEC 108-25034	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		114-25026	A2 00779 C=103949
		WEIGHT -	SCALE 4:1 SHEET 1 OF 1 REV K2
		CUSTOMER DRAWING	