
Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/23/13	A	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

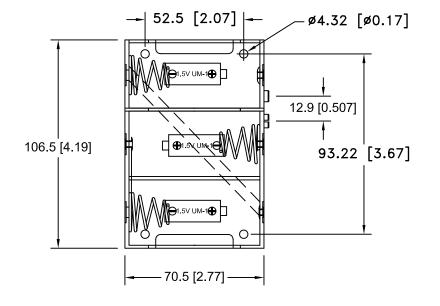

## NOTES:

## 1 MATERIAL:

HOUSING: BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C


RIVETS: BRASS, NICKLE PLATED.


SPRING: SPRING STEEL, NICKLE PLATED. 9 VOLTS SNAPS: BRASS, NICKLE PLATED.

CONTACT RESISTANCE: UNDER  $50m\Omega$  FOR +/- CONTACTS PER

EIA-540J000

ROHS 2 COMPLIANT.





Tolerance	MPD Memory Protection Devices, Inc						
(Except as noted)	200 Broad Hollow Road, Farmingdale, New York 11735						
decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title						
± .8 (.030)	THREE "D" CELL HOLDER WITH 9V SNAPS						
Angular	Date	Drawing Number					
± 3°	08/23/13	BH3DSF					