

PART No MATRIX

E 1 2 A 0 6 0 1 6 M X X X X

OPTIONS


E=ETHERNET

HEADS
1 = M12 D-Coding
1 = M12 X-CodingHEADS STYLE:
060 = MALE STR / MALE STRUNITS :
M= METER
T=10x METERLENGTH EXAMPLES:
005=0.5
010=1
150=15


H=2 PCS. OF I/D Carrier

WIRING TYPE:
A=4 Pole
(STRAIGHT WIRED)CABLE TYPE
CABLE 16

SCALE 1:2

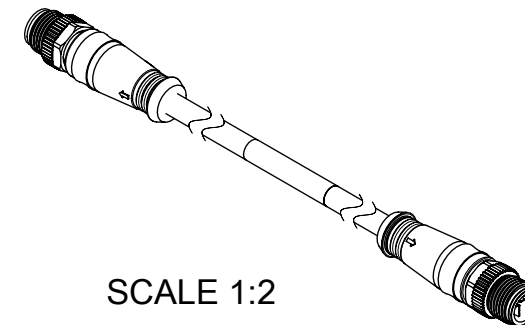


LENGTH + Tol, (SEE PART LIST)

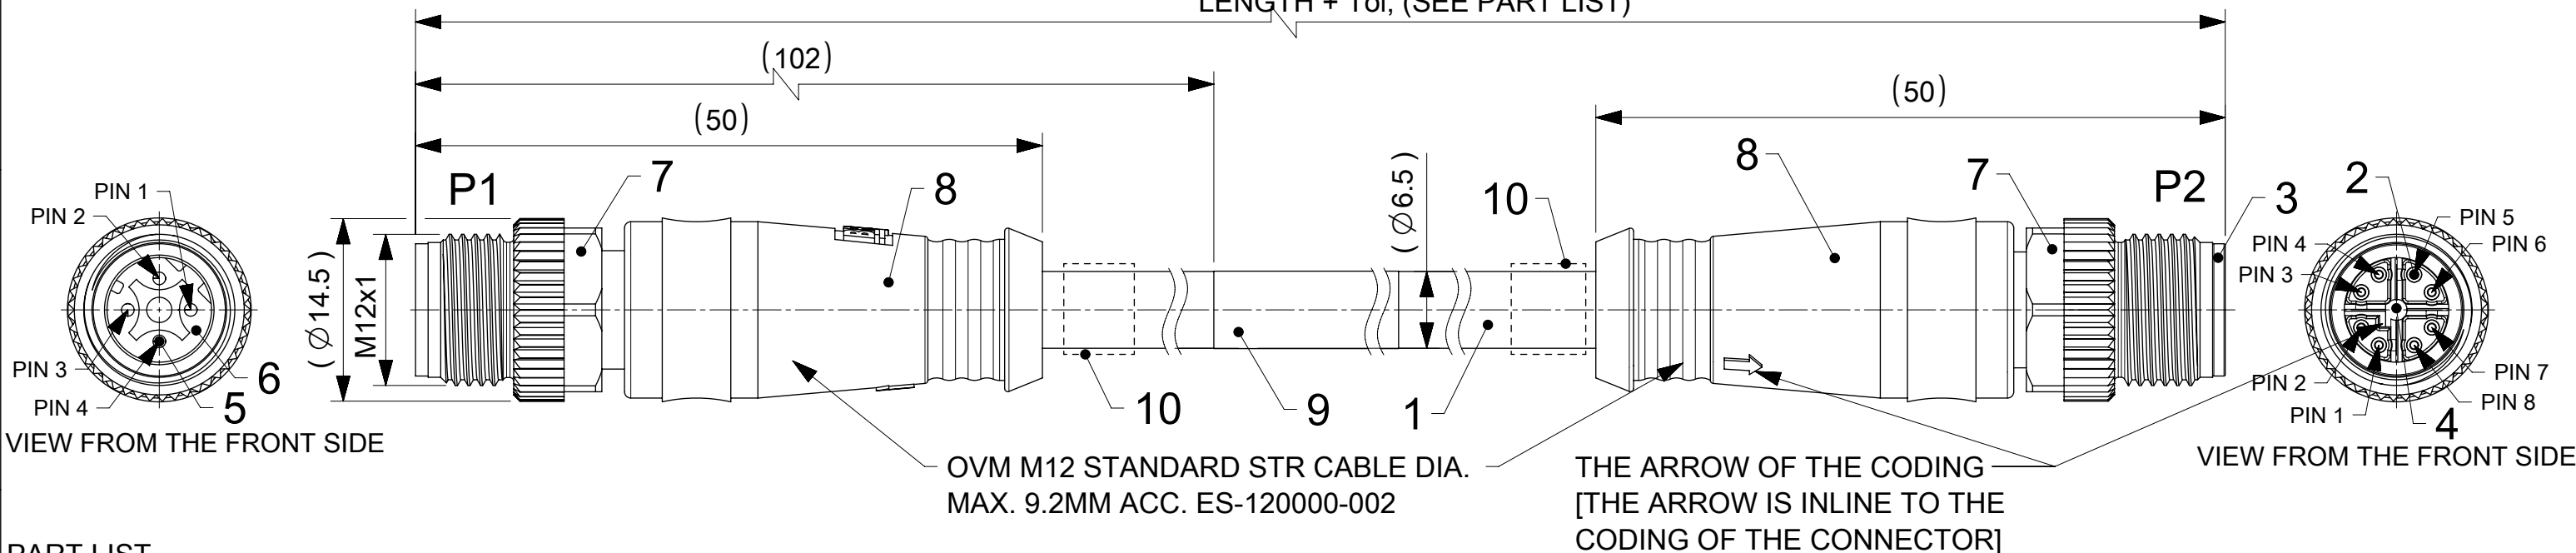

PART LIST

MOLEX PN	ENGINEERING NO	L+Tol.[mm]
1203410935	E12A06016M010H	1000
1201089012	E12A06016M020H	2000
1201089013	E12A06016M030H	3000
1201089014	E12A06016M040H	4000
1201089015	E12A06016M050H	5000
1201089016	E12A06016M060H	6000
1201089017	E12A06016M070H	7000
1201089018	E12A06016M080H	8000
1204720026	E12A06016M100H	10000
1201089020	E12A06016M120H	12000
1201089021	E12A06016M150H	15000
1201089022	E12A06016M200H	20000
1201089023	E12A06016M250H	25000
1201089024	E12A06016M300H	30000
1201089025	E12A06016M350H	35000
1201089026	E12A06016M400H	40000
1201088942	E12A06016M450H	45000
1201088943	E12A06016M500H	50000
1201088944	E12A06016M550H	55000
1201088945	E12A06016M600H	60000
1201088946	E12A06016M650H	65000
1201089027	E12A06016M700H	70000
1201088947	E12A06016M750H	75000
1201088948	E12A06016M800H	80000

DOCUMENT STATUS P1 RELEASE DATE 2022/08/31 14:48:38

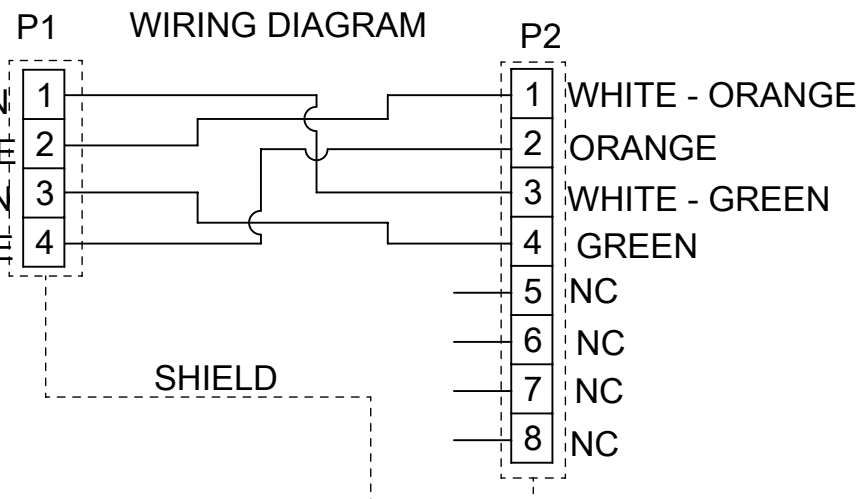

NOTES :

ELECTRICAL DATA :

VOLTAGE RATING : 48V

AMPERAGE RATING : 0.5A

INSULATION RESISTANCE : 10⁸Ω MIN.

MATING CYCLES : MIN. 100

ENVIRONMENTAL :

PROTECTION : IP67 IN MATED AND LOCKED POSITION

OPERATING TEMPERATURE : -25°C TO +80°C

BOM

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	-	#24-2-2 WELD SLAG RESIST	TPU	TEAL
2	8	CONTACT PIN (X-CODE)	Cu ALLOY	GOLD OVER Ni-PLATED
3	1	MALE INSERT (X-CODE)	PUR	BLACK
4	1	M12 SHIELDING CROSS SHELL	GD-ZnAl4	Zink - diecast
5	4	CONTACT PIN (D-CODE)	BRONZE	GOLD PLATED
6	1	MALE INSERT (D-CODE)	PUR	BLACK
7	2	COUPLING NUT	BRASS	Ni-PLATED
8	-	MOULDING MATERIAL	TPU	BLACK
9	1	LABEL	VINYL	YELLOW
10	2	I/D CARRIER	PVC	TRANSPARENT

TABLE 1

CABLE LENGTH TOLERANCES	
LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SCALE	CURRENT REV DESC: DRAWING UPDATE	molex			
FA = 0	mm	1:1	ER20220167	CSE M12 ETH 4P DC MA STR TPU XC MA XM DE			
FE = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			PRODUCT CUSTOMER DRAWING			
FE = 0	ANGULAR TOL ± 1.0°			DOCUMENT NUMBER 1201088942 DOC TYPE PSD DOC PART 000 REVISION A2			
DIVISIONAL SYMBOLS	4 PLACES ±		EC NO: 719726	MATERIAL NUMBER SEE PART LIST CUSTOMER GENERAL MARKET SHEET NUMBER 1 OF 1			
	3 PLACES ±		DRWN: FDAFERNER 2022/08/31				
	2 PLACES ± 0.05		CHK'D: RSILLER 2022/08/31				
	1 PLACE ± 0.3		APPR: RSILLER 2022/08/31				
	0 PLACES ± 0.5		INITIAL REVISION: DRWN: MDHARMANTI 2021/08/26				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: RSILLER 2021/09/13				
	THIRD ANGLE PROJECTION						
	DRAWING						
	SERIES						
	A3-SIZE						
	120108						