

Passive - 2 wire 16 Channel Input Fused* w/LED and Circuit Breaker Allen-Bradley

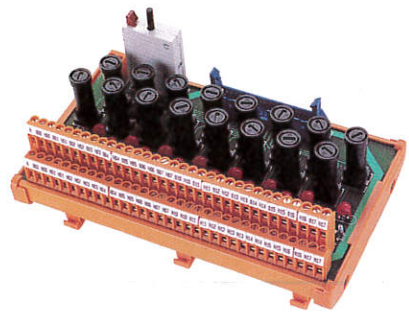

Passive - 2 wire 16 Channel Input Allen-Bradley

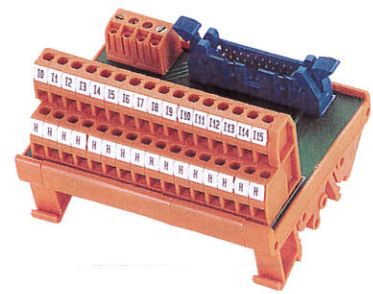

Technical Data

Type	RS PLC DI W/ LD, F & CB	RS PLC 16PT DI 1 x 16
Part number	**996414** 1771-ID16	**995867** 1746-IA16
Rated voltage	120 VAC	120 VAC
Rated current	.25 A per channel / 12.0 A per module / 10 A circuit breaker	2.0 A per channel / 6.0 A per module / 3.0 A per common
Cable connection	(1) 1 x 40 pin IDC	(1) 1 x 20 pin IDC
LED Indicators	Yes	No
Operating Temperature	0°C...+50°C	0°C...+50°C
Storage Temperature	-20°C...+60°C	-20°C...+60°C
Dimensions LxWxH mm	182 x 100 x 59	89 x 70 x 59
Terminal Wire Size	#26...14 AWG	#26...14 AWG
Terminal Type	Screw Clamp	Screw Clamp
Approvals		

Wiring Schematics

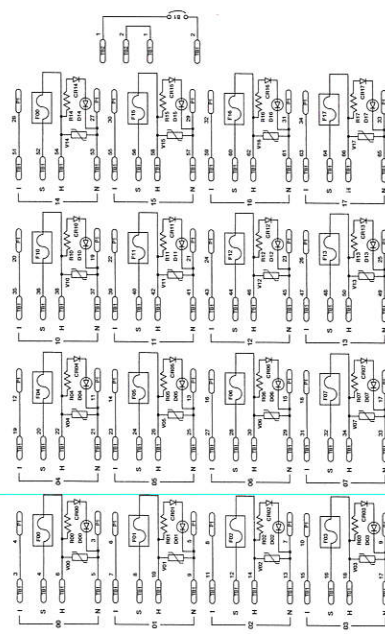

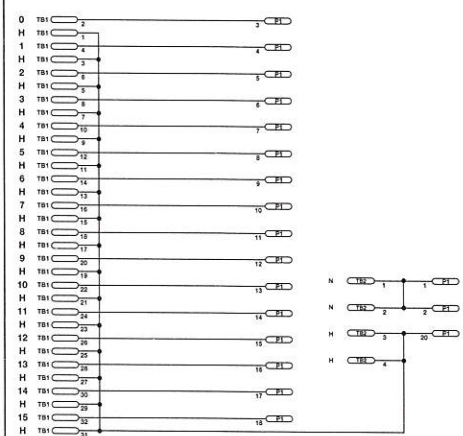

*5 x 20 mm fuses are required.
Note: Markings vary based on I/O used.