



4 dBi MultiBand Rubber Duck Portable Antenna 700-2700 MHz SMA Connector

Antennas Technical Data Sheet

PE51RD1028

Features

- IP67 Weatherproof Rating for Rugged Environments
- Rubber Coated Brass Dipole
- 0 to 4 dBi Gain
- 90° SMA Right Angle Connector

Applications

- Infotainment Systems, Routers, WiFi Hotspots, HD Video Transmission, Gateways, Dash Cameras, Public Transportation
- Connected Cars or Self-Driving Cars, Fleet Management, Logistics
- 4G & 5G Networks
- 700, 850, 900, 1800, 1900, 2100, 2600 MHz Bands
- IoT, Cellular, Zigbee, Z-Wave, Bluetooth

Description

The PE51RD1028 4G Right Angle Rubber Duck Antenna from Pasternack is a high performance omnidirectional “rubber-duck” antenna. This rubber duck is designed for the 698 MHz to 2700 MHz bands and is available to ship same day. It features a RIGID 90° right angle SMA-Plug (male) connector. This right angle SMA allows the PE51RD1028 to be mounted directly to terminals and other fixed radios. It is a coaxial sleeve design with an omni-directional pattern. The PE51RD1028 is ideally suited for 4G, LTE, IoT, Zigbee, Z-Wave and Bluetooth bands.

The Pasternack high performance rubber-duck PE51RD1028 is a rubber coated RIGID antenna providing broad coverage and 0-3 dBi gain. This SMA male rubber duck is suitable for commercial radios in public and private 4G and Cellular networks that are equipped with SMA female connectors. Pasternack’s PE51RD1028 supports 700, 800, 850, 900, 1800, 2100, 2400, and 2600 MHz bands.

This 4G 698 MHz to 2700 MHz rubber duck antenna with a SMA male connector, as well as our wide selection of superior quality RF parts, ships same day. Contact our knowledgeable and friendly technical support and sales staff for your answers on antennas or other Pasternack products.

Configuration

Design	Portable
Band Type	Multi
Radiation Pattern	Omni Directional
Wavelength	1/4, 1/2
Polarization	Vertical
Connector Type	SMA Male

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	700		2.7	MHz
Input VSWR		2:1	2.5:1	
Impedance		50		Ohms
Gain	0	4		dBi
Input Power			2	Watts

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: [4 dBi MultiBand Rubber Duck Portable Antenna 700-2700 MHz SMA Connector PE51RD1028](#)



4 dBi MultiBand Rubber Duck Portable Antenna
700-2700 MHz SMA Connector

Antennas Technical Data Sheet

PE51RD1028

Specifications by Band

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	700-960	1,710-2,170	2,500-2,700			MHz
Gain	0	4	2			dBi
VSWR Max	3:1	2.5:1	2.5:1			

Mechanical Specifications

Radome Material	ABS
Width	0.65 in [16.51 mm]
Height	2.25 in [57.15 mm]

Environmental Specifications

Temperature

Operating Range	-20 to +65 deg C
Storage Range	-20 to +65 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

4 dBi MultiBand Rubber Duck Portable Antenna 700-2700 MHz SMA Connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 dBi MultiBand Rubber Duck Portable Antenna 700-2700 MHz SMA Connector PE51RD1028](#)


URL: <https://www.pasternack.com/multi-antenna-700-mhz-2.7-ghz-4-dbi-gain-sma-pe51rd1028-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE51RD1028 CAD Drawing

4 dBi MultiBand Rubber Duck Portable Antenna 700-2700 MHz SMA Connector

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	10/08/2020
		APPROVED
		KHIETPAS

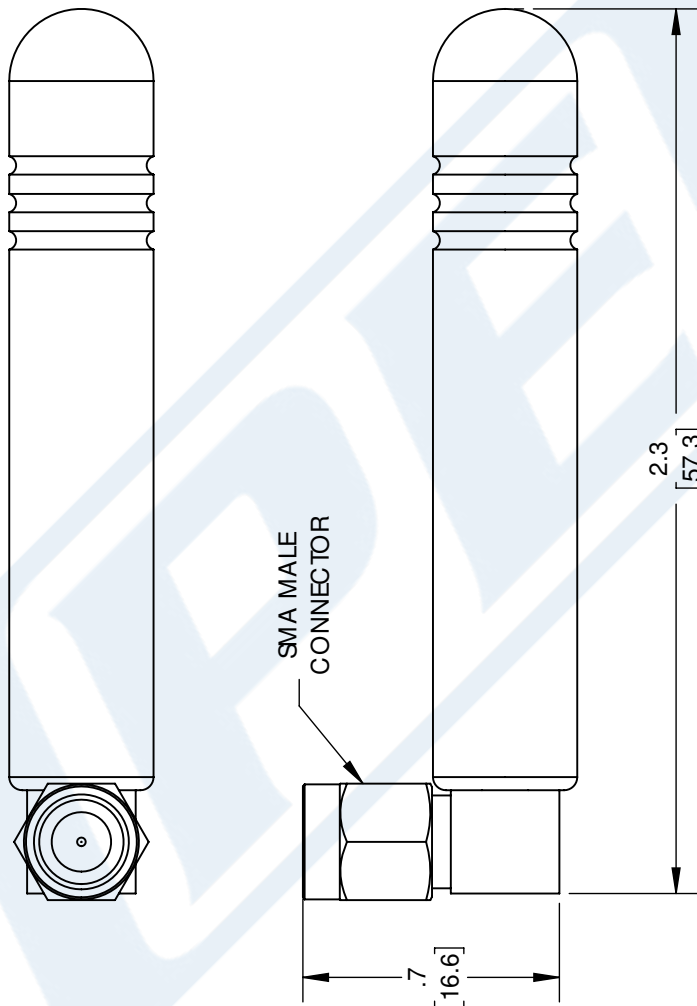

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLEANCES:</p> <p>.X = ±.2 [5.08] FRACTIONS ± 1/32</p> <p>.XX = ±.02 [.51] ANGLES ± 1°</p> <p>.XXX = ±.005 [.13]</p> <p>CABLE LENGTH (L), TOLERANCES:</p> <p>L ≤ 12 [305] = +1 [25] / -0</p> <p>12 [305] < L ≤ 60 [1524] = +2 [51] / -0</p> <p>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] < L = +5% / -0</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	<p>PE PASTERNAK an INFINITI brand</p> <p>Pasternack Enterprises, Inc. P. O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com</p>	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>
	<p>SIZE A</p> <p>CAGE CODE 53919</p> <p>DRAWN BY BPUCHASKI</p> <p>ITEM NO. PE51RD1028</p>	<p>REV A</p>

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.