



Tous droits réservés. Toute réimpression ou utilisation non autorisée sans la permission écrite de la société FCI Electronics est formellement interdite.

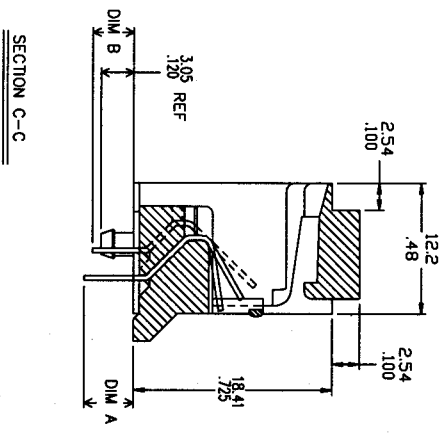

All rights reserved. Reproduction or use in any form without written authority from the proprietor, FCI Electronics, is expressly prohibited.

PRODUCT NO	DIM A	DIM B	HOUSING MATERIAL	CONTACT PLATING	REMARKS
66010-001/-001LF	4.57 <sup>+0.14</sup> / <sub>-0.14</sub> /180 <sup>+0.05</sup> / <sub>-0.05</sub>	3.81 <sup>+0.14</sup> / <sub>-0.14</sub> /150 <sup>+0.05</sup> / <sub>-0.05</sub>	SUPER TOUGH NYLON UL 94V-0 GRAY	.76m /30m *AU OVER 2.5m /100m *Ni	
66010-002/-002LF	4.45±0.38 /175±.015	4.45±0.38 /175±.015		.76m /30m *AU OVER 2.5m /100m *Ni	
<del>66010-003</del>	<del>3.99±0.30 /158±.012</del>	<del>3.99±0.30 /158±.012</del>		<del>.76m /30m *AU OVER 2.5m /100m *Ni</del>	<del>MADE FROM 66010-001 OR -002</del>
66010-004/-004LF	4.57 <sup>+0.14</sup> / <sub>-0.14</sub> /180 <sup>+0.05</sup> / <sub>-0.05</sub>	3.81 <sup>+0.14</sup> / <sub>-0.14</sub> /150 <sup>+0.05</sup> / <sub>-0.05</sub>	SUPER TOUGH NYLON UL 94V-0 GRAY	.76m /30m *GXT	
66010-005/-005LF	4.57 <sup>+0.14</sup> / <sub>-0.14</sub> /180 <sup>+0.05</sup> / <sub>-0.05</sub>	3.81 <sup>+0.14</sup> / <sub>-0.14</sub> /150 <sup>+0.05</sup> / <sub>-0.05</sub>	SUPER TOUGH NYLON UL 94V-0 GRAY	.76m /30m *AU OVER 2.5m /100m *Ni	
66010-006/-006LF	4.57 <sup>+0.14</sup> / <sub>-0.14</sub> /180 <sup>+0.05</sup> / <sub>-0.05</sub>	3.81 <sup>+0.14</sup> / <sub>-0.14</sub> /150 <sup>+0.05</sup> / <sub>-0.05</sub>	SUPER TOUGH NYLON UL 94V-0 BLACK	.76m /30m *GXT	

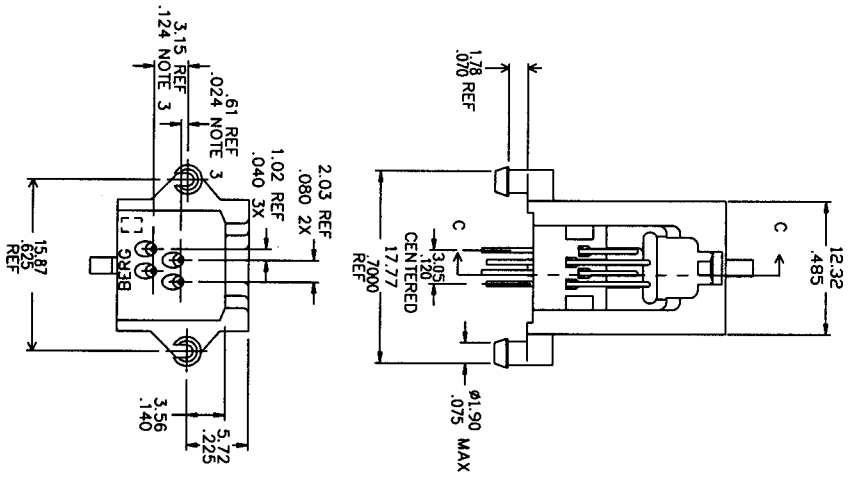

- NOTES:
1. FOR VISUAL, MECHANICAL AND FUNCTIONAL REQUIREMENTS SEE SPECIFICATION BUS-12-084.
  2. GOLD WIRE MATERIAL: PHOS BRONZE ALLOY; UNS-C51000, 135-150M PSI TENSILE PLATING: SEE TABLE
  3. DIMENSIONAL TOLERANCE: ±.25/±.010 AT BASE ±.64/±.025 AT TIP
  4. FOR ADDITIONAL APPLICATION AND MOUNTING INFORMATION SEE DRAWING TA-390.
  5. HOUSING MATERIAL: SEE TABLE.
  6. TEST METHOD PER UL-1863, SECTION 22.2
  7. THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  8. THE HOUSING WILL WITHSTAND EXPOSURE TO 280°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
  9. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

REV	DATE	BY	CHKD	DESCRIPTION
P	06/11/91	KC		INITIAL
R	03/14/92	KC		
S	09/13/93	TC		ANGLES ±.2°
T	02/13/96	CL		DR
U	02/22/01	C C		ENGR
V	02/19/05	YS		CHR

Sheet	Revision	Sheet	Index
V	1	1	

tolerances unless otherwise specified	0 ± 0.25
	.00 ± 0.13
	.000 ± 0.05

CUSTOMER COPY	projection	MM/INCH	product family	MOD JACK
FCI Electronics			size	A3
www.fciconnect.com			product no	66010
			code	TWN
			sheet	1 of 1