


REV.	SPECIFICATION	ECN NO.	APPD.
X8			

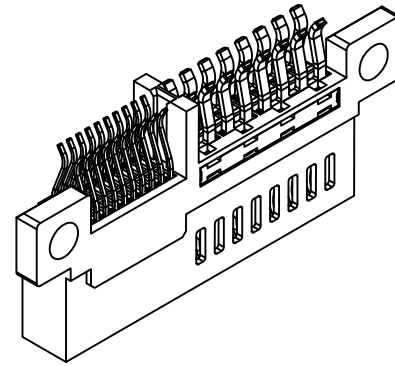

Material and Plating:

Housing: High Temperature Plastic UL94V-0 .
Power Contacts: High Conductivity Copper.
Signal Contacts: Phosphor Bronze.
 30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: Power Pin 12.5A (UL). Signal Pin 1.5A .
Dielectric Withstanding Voltage:



Power Pin DC 1000V For 1 Minute.
 Signal Pin DC 500V For 1 Minute.

Contact Resistance: Power Pin 0.6mΩ max.
 Signal Pin 25mΩ max.


Insulation Resistance: Power Pin 5000MΩ min. at DC 500V.
 Signal Pin 500MΩ min. at DC 500V.

Operating Temperature: -55°C~+105°C.



***Rohs Compliant**

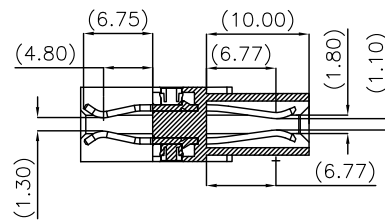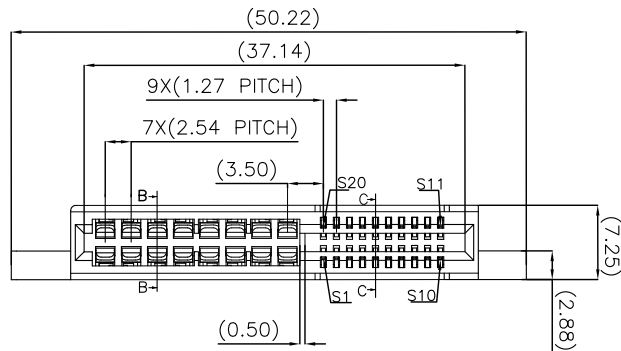

SECTION B-B

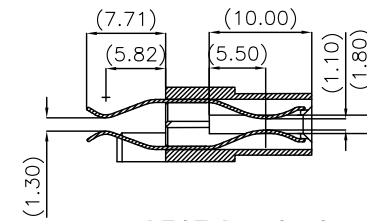

SECTION C-C



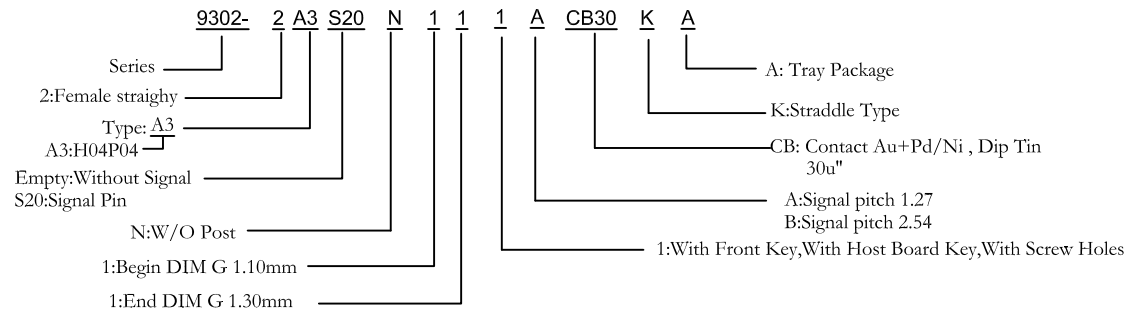
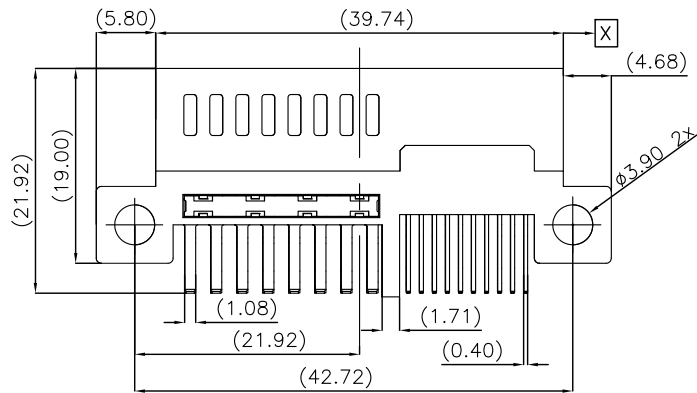


Tolerances	Dwg No.	9302-D0000-004
X=±0.5	Projection	
.X=±0.25	Unit	mm
.XX=±0.15	Scale	1:1
	Drawn By	ZJ 09/21'18

Title:
 9302 Series
 High Power And Signal
 Edge Card Connector

DUPIIN			
DUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9302-2A3S20N11ACB30KA			
SHEET	1/2	Ver.No.	x8

REV.	SPECIFICATION	ECN NO.	APPD.
X8			

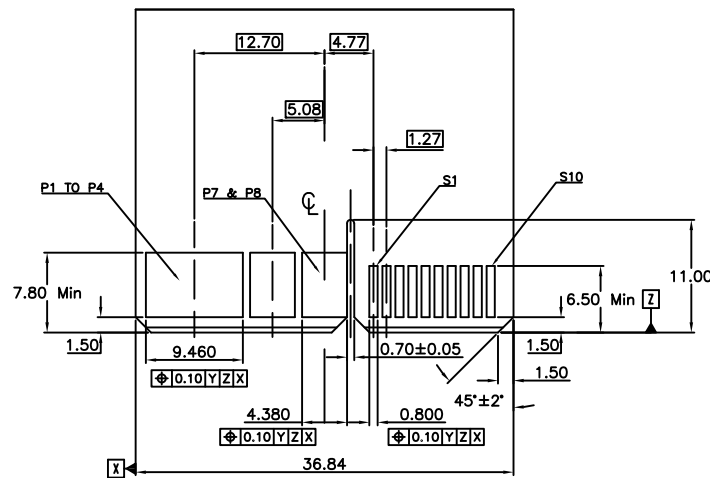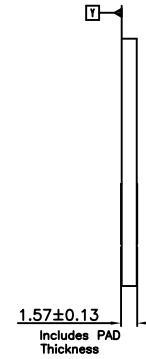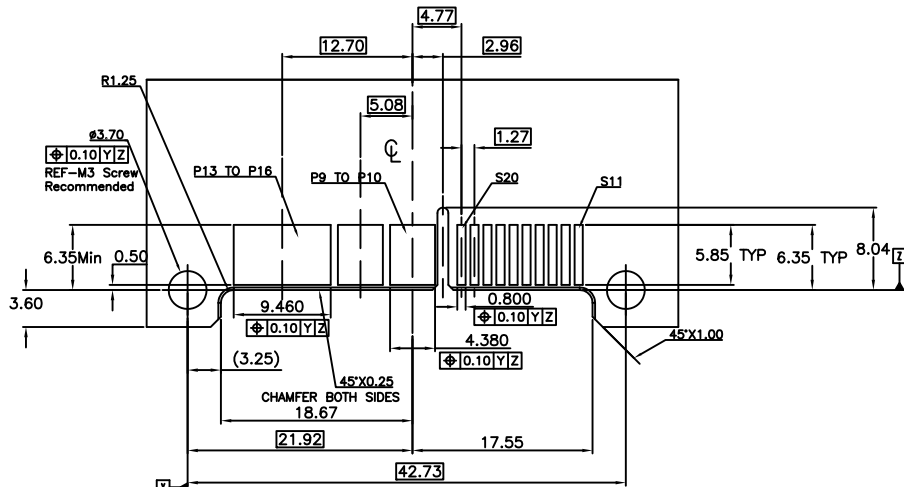

Tolerances	Dwg No.	9302-D0000-004
X=±0.5	Projection	
.X=±0.25	Unit	mm
.XX=±0.15	Scale	1:1
	Drawn By	ZJ 09/21'18

Title: 9302 Series
High Power And Signal
Edge Card Connector

DUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9302-2A3S20N11ACB30KA			
SHEET	2/2	Ver.No.	x8