

NOTES:

1.0 MATERIALS:

- 1.1 HOUSING: STAINLESS STEEL
ASTM-A582, TYPE 303.
- 1.2 BNC NUT: HALF HARD BRASS
PER ASTM B16
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD
ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER
ASTM-D1457.

2.0 PLATING:


- 2.1 HOUSING: PASSIVATED PER MIL-F-14072
AND QQ-P-35.
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204
TYPE II, CLASS 2
- 2.3 BNC NUT: NICKEL PER QQ-N-290

3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 FREQUENCY RANGE: DC to 8.0 GHz
- 3.2 VSWR (MAX.):
DC to 4.0 GHz: 1.15:1
4.0 to 8.0 GHz: 1.25:1
- 3.3 IMPEDANCE: 50 OHMS

4.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-04398-27-04)

5.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

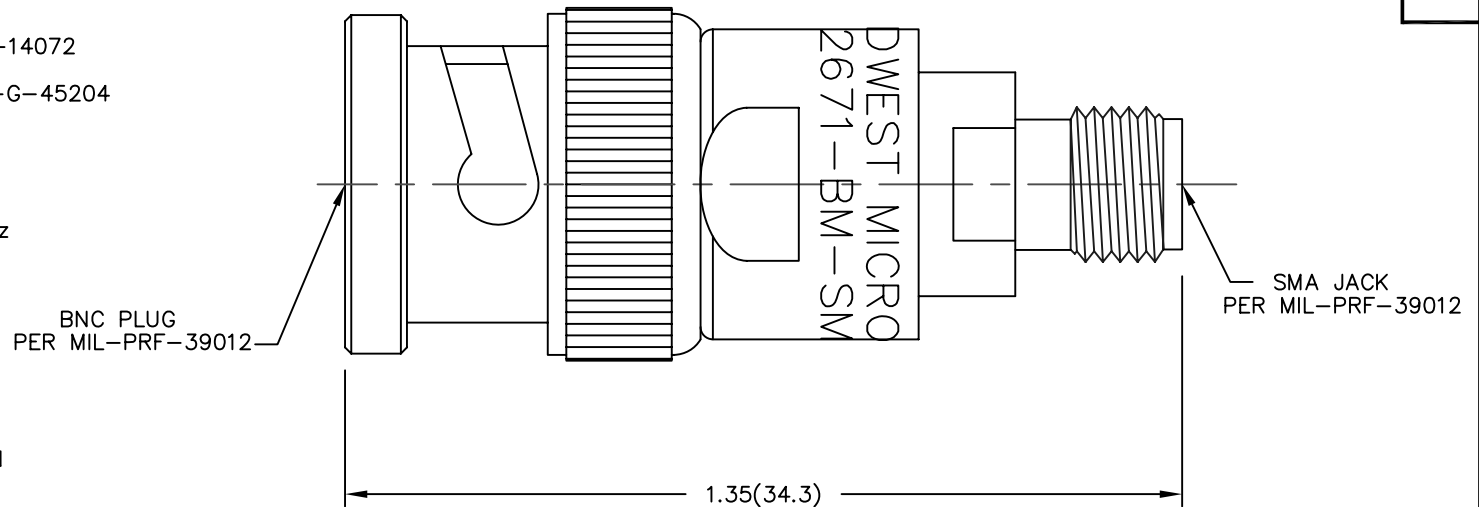

MODEL NUMBER
ADT-2671-BM-SMF-02

DWG NO. WAS: 04011-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/3/82
A	ECR 1441	3/22/82
B	ECR 1743	10/12/82
C	ECR 6545	7/10/89
C1	UPDATE TO MODEL NO.	8/4/92
D	REDRAW ON CAD	11/16/92
E	EON 12615	5/4/93
E1	ADDED TITLEBLOCK	3/14/05

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p>		<p>CAGE CODE 34078</p>		<p>MIDWEST MICROWAVE</p>	
<p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'</p>		<p>EMERSON Network Power Connectivity Solutions</p>		<p>TITLE ADAPTER BNC PLUG TO SMA JACK OUTLINE DRAWING</p>	
<p>DRAWN/DATE A.BEAITY 11/16/92</p>		<p>ENG./DATE A.OSGA 11/19/92</p>		<p>DRAWING NUMBER ADT-2671-BM-SMF-02-01</p>	
<p>CHECKED/DATE M.HOLLMAN 11/18/92</p>		<p>APPROVED/DATE</p>		<p>REV. E1</p>	
<p>SCALE: 5=1</p>				<p>SHEET 1 of 1</p>	