




UNIT:MM

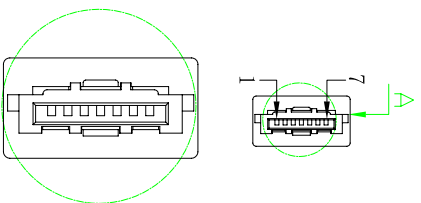


SECTION A-A
SCALE 2:1

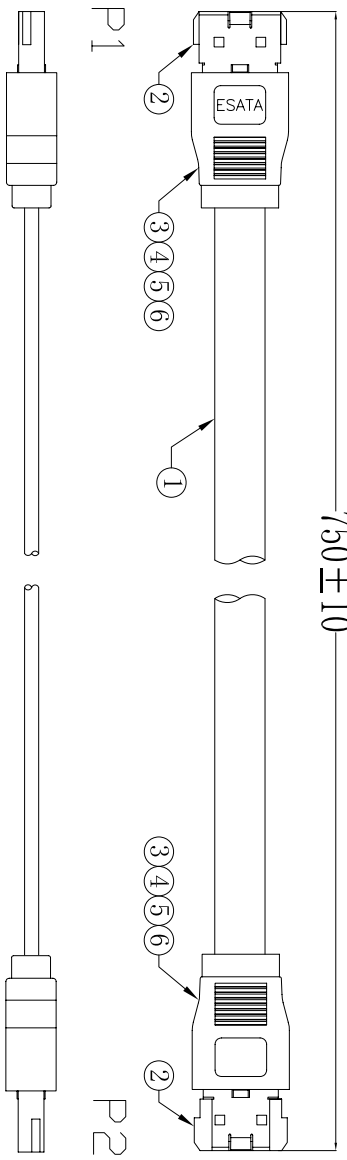

ELECTRICAL TEST:
 1.100% OPEN SHORT & MISWIRE TEST.
 2.CONDUCTIVE RESISTANCE:1 ohm MAX.
 3.INSULATION RESISTANCE:10M OHM/MIN
 4.HI-PAT TEST DC 300V

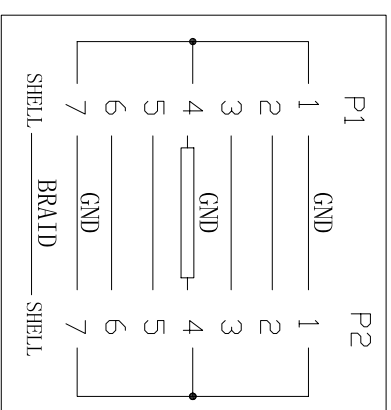

PIN ASSIGNMENT:

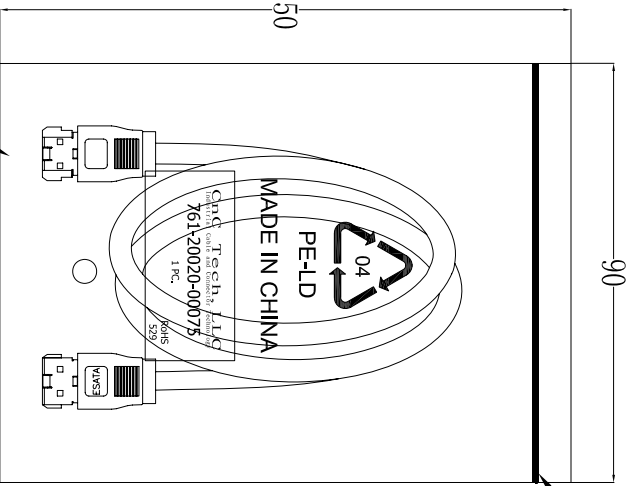

| NO. | NAME | Q'TY | SPECIFICATION |
|-----|-------------|------|---|
| ⑧ | PE BAG | 1/10 | CLEAR SIZE: 290*430*40.05mm PRINT BLACK"MADE IN CHINA"+100CS"及产期, 有透气孔 |
| ⑦ | PE BAG | 1 | CLEAR SIZE:90*150*40.05mm PRINT BLACK"MADE IN CHINA"+1RS"及产期, 有透气孔 |
| ⑥ | OUT JACKET | 129 | PVC 45P COLOR BLACK |
| ⑤ | COPPER FOIL | 2 | DOUBLE-SIDED CONDUCTIVE COPPER FOIL W10mm*L130mm |
| ④ | ACETATE | 2 | ACETATE CLOTH TAPE W10mm*L40mm |
| ③ | TUBE | 2 | HEAT SHRINK TUBE BLACK OD12mm L10mm |
| ② | CONN | 2 | ESATA TOP METAL SHELL NICKEL ESATA 7P/F CRIMP TYPE PIN:G/F INSULATOR:BLACK |
| ① | CABLE | 1 | UL2725 [26AWG(1/0.404)*2F INS:HD-PE+D/W(1/0.32)*2C+AL/MY]*2F INNER JACKET PVC OD2.1*7.3mm +BRAID(16/10/0:1)+PVC JACKET COLOR:BLACK OD4.0*9.0MM L730+5/-0mm. |

CNC Tech, LLC
 Industrial Cable and Connector Technology

| | | | |
|------------------|---------|-------------|-----------------|
| DRAWN BY | ZHONGHS | DRAWING NO. | |
| CHECKED BY | | CUSTOMER | |
| APPROVAL BY | | ITEM NO. | 761-20020-00075 |
| DECIDE BY | | DATE | 2012-02-16 |
| VERSIONS/EDITION | A/0 | PROJECTION | |