

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: VW-1



**Conductor**

Conductor count: 1  
 Gauge: 30 AWG 0.05 mm<sup>2</sup>  
 Material: tinned copper  
 Strand size:  $\varnothing$ 0.254 mm (solid)  
 Resistance at 20 °C: 361  $\Omega$  /km max

**Insulator**

Material: Polyphenylene Ether, Modified (mPPE)  
 Color: orange  
 Diameter:  $\varnothing$ 0.8  $\pm$ 0.08 mm  
 Nominal thickness: 0.25 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Wire marking:** E339579 UL AWM STYLE 11028 30 AWG 105°C  
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

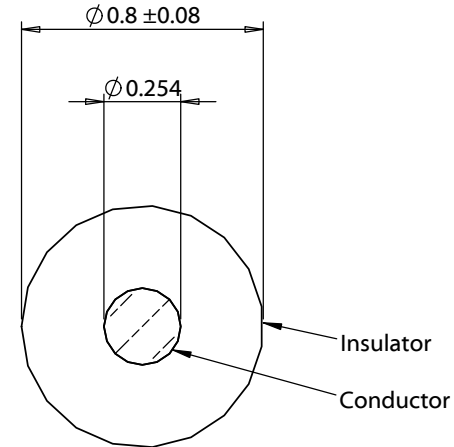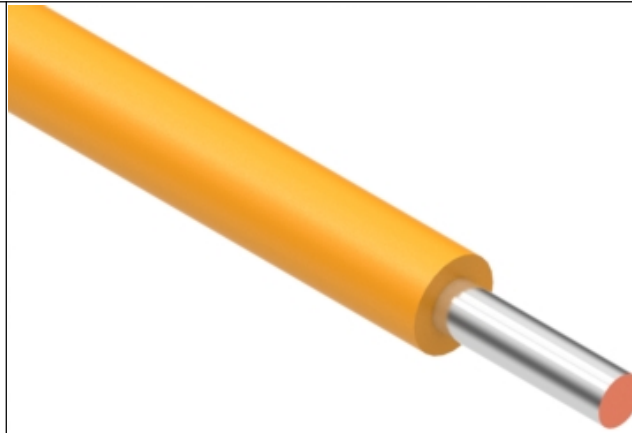

Revision:	Date:	Description:	Prepared: <b>AW</b> <small>Digitally signed by AW Date: 2021.06.03 12:41:59 -07'00'</small>	Notes:	<b>TENSILITY</b> <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	6/3/2021	Initial release	Verified: <b>JC</b> <small>Digitally signed by JC Date: 2021.06.07 12:11:40 -07'00'</small>	RoHS compliant  Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: $\pm$ 0.5 mm X.X: $\pm$ 0.3 mm X.XX: $\pm$ 0.05 mm	Description:	Size: A
				Wire, hook-up, tinned solid core, 30 AWG, UL 11028, 600V, 105C, 0.8 mm, mPPE, orange	Part number: <b>30-02128</b>
					Scale: 40:1
					Sheet 1 of 1

5

4

3

2

1