



SPECIFICATION FOR DYNAMIC SPEAKER

TOTAL PAGE 09

www.be-star.com

RoHS

Customer		Model Name	BMS28-12B-08H05CW152M
Customer P/N		Product No.	130261
Date	25 Mar. 20	Issue No.	BS/TES01.1822A3
Page	01 of 09	Issue Date	2020.03.25

Approval:

- 1.Characteristics
- 2.Drawing
- 3.Bill of Material
- 4.Reliability Test
- 5.Packing
- 6.History Change Record

Drawn by	Checked by	Approved by	Customer approved
任江凤	杨紫群	张勇磊	

BESTAR Holdings Co., Ltd.
No.199, West Huanghe Road, Changzhou, Jiangsu, P.R. China
Tel: +86 5196 789 6200
Fax: +86 5196 789 6220
E-Mail: Info@be-star.com
Web: www.be-star.com


BMS28-12B-08H05CW152M

1. Characteristic

1.1 Electrical and Mechanical Characteristics

No.	Item	Specification
1.	Impedance(at 1kHz)	$8\pm 15\% \Omega$
2.	Rated Input Power	0.8W
3.	Maximum Input Power	1.2W
4.	Resonance Frequency	$650\pm 20\% \text{Hz}$
5.	Frequency Response	F0 ~ 20KHz
6.	Output SPL (at 0.1W/0.1m)	$90\pm 3\text{dB}$ at 600 Hz
7.	Distortion (at 1kHz,0.1W)	$\leq 5\%$
8.	Buzzes & Rattles	Must be normal at sine wave 2.53V
9.	Magnet	NdFeB
10.	Operating Temperature	$-20\dots+70^\circ\text{C}$
11.	Storage Temperature	$-40\dots+85^\circ\text{C}$

1.2 Test Method

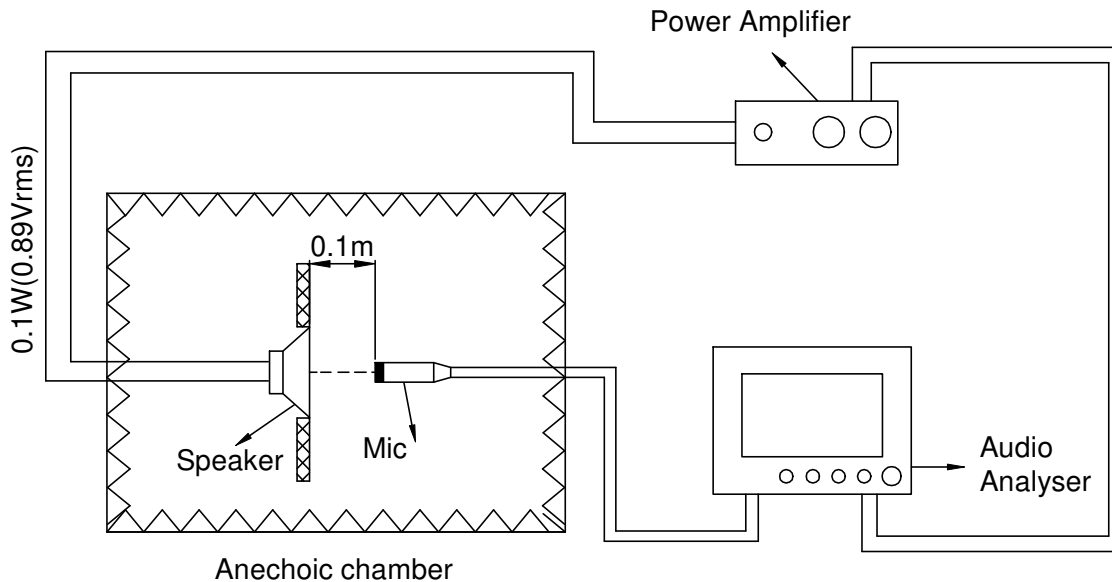


This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content


				Date:	2020.03.25	BMS28-12B-08H05CW152M	
				Drawn by:	任江凤		
A3	2020.03.25	任江凤		Checked by:	杨紫群	Speaker	
Rev.	Date	Drawn	Note	Approved by:	张勇磊		
BESTAR Holdings Co., Ltd						DRG NO: BS/TES01.1822A3	Page:02 of 09
http://www.be-star.com info@be-star.com							

BMS28-12B-08H05CW152M

1.3 Fundamental (0.1W/0.1m SOUNDCHECK testing)

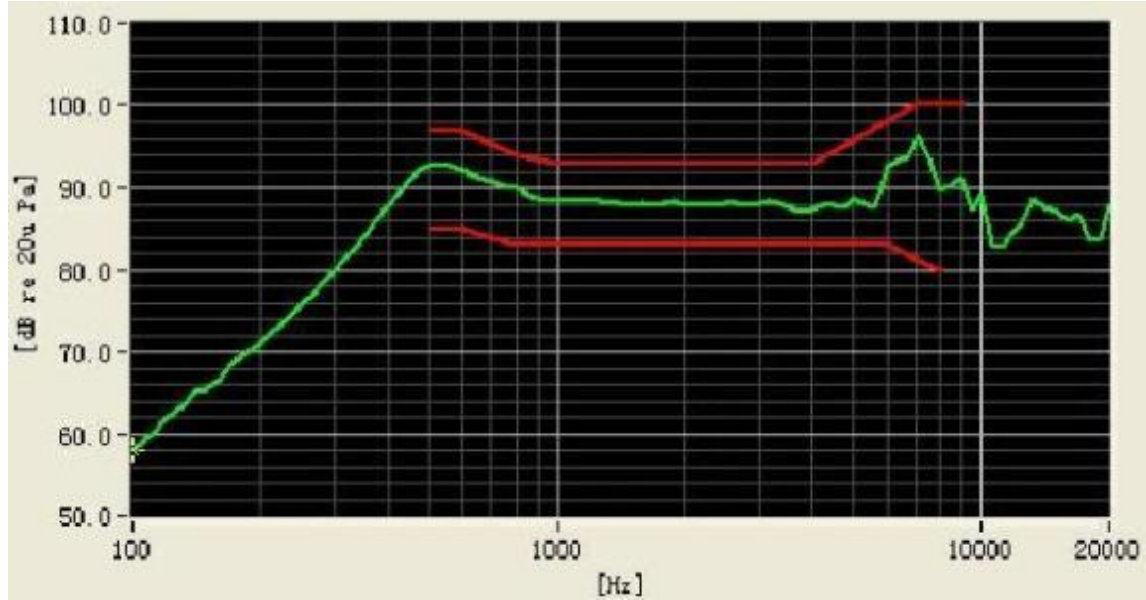

1.4 THD (0.1W/0.1m SOUNDCHECK testing)

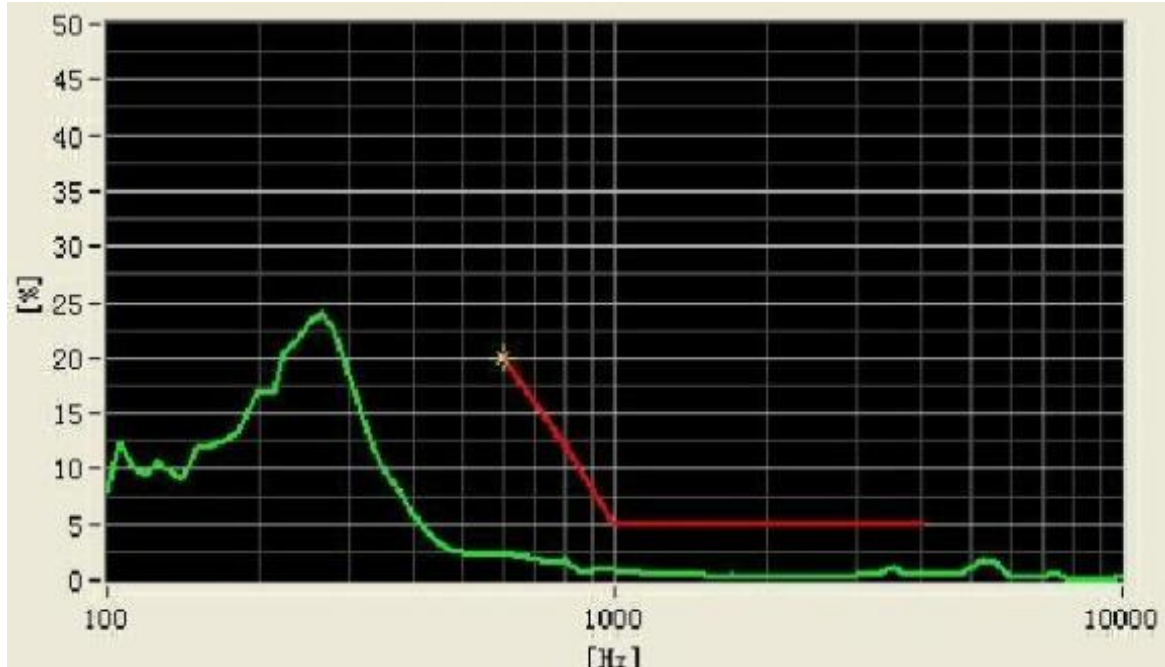


This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content


				Date:	2020.03.25	BMS28-12B-08H05CW152M	
				Drawn by:	任江凤		
A3	2020.03.25	任江凤		Checked by:	杨紫群	Speaker	
Rev.	Date	Drawn	Note	Approved by:	张勇磊		
BESTAR Holdings Co., Ltd						DRG NO: BS/TES01.1822A3	Page:03 of 09
http://www.be-star.com info@be-star.com							

BMS28-12B-08H05CW152M

1.5 Impedance (0.1W/0.1m SOUNDCHECK testing)

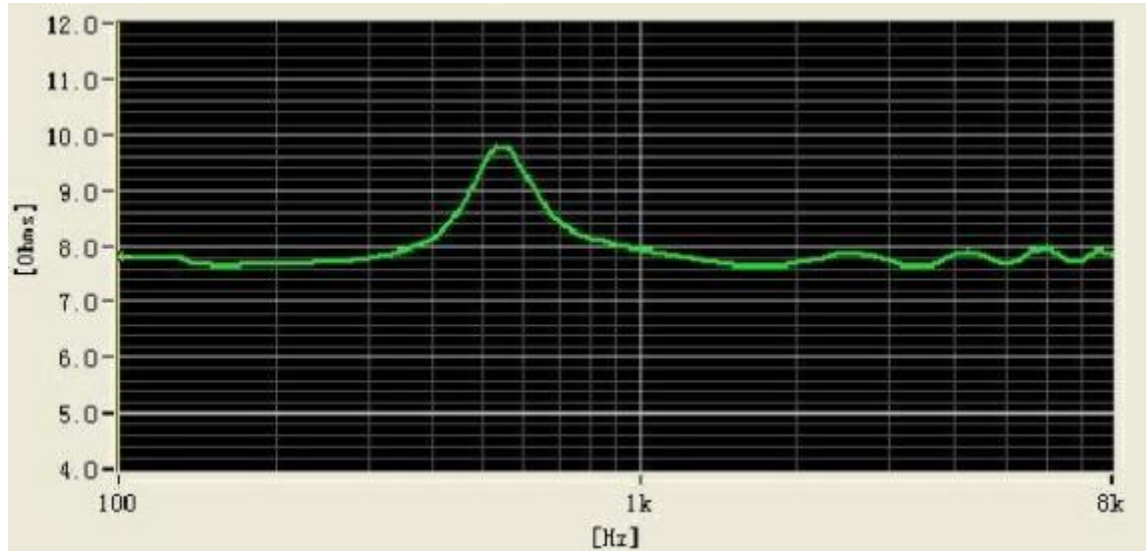


1.6 Rub&buzz (0.1W/0.1m SOUNDCHECK testing)

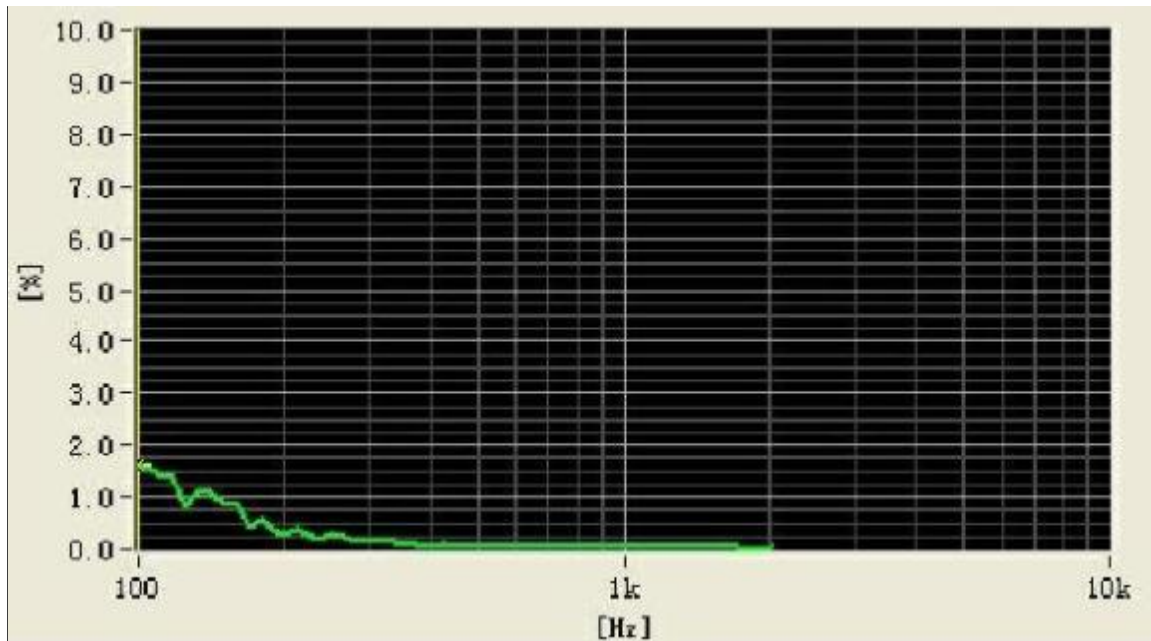

This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content



				Date:	2020.03.25	BMS28-12B-08H05CW152M	
				Drawn by:	任江凤		
A3	2020.03.25	任江凤		Checked by:	杨紫群	Speaker	
Rev.	Date	Drawn	Note	Approved by:	张勇磊		
BESTAR Holdings Co., Ltd						DRG NO: BS/TES01.1822A3	Page:04 of 09
http://www.be-star.com info@be-star.com							

BMS28-12B-08H05CW152M
2. Drawing



Terminal
5054311100

Housing 5055650201
BLACK

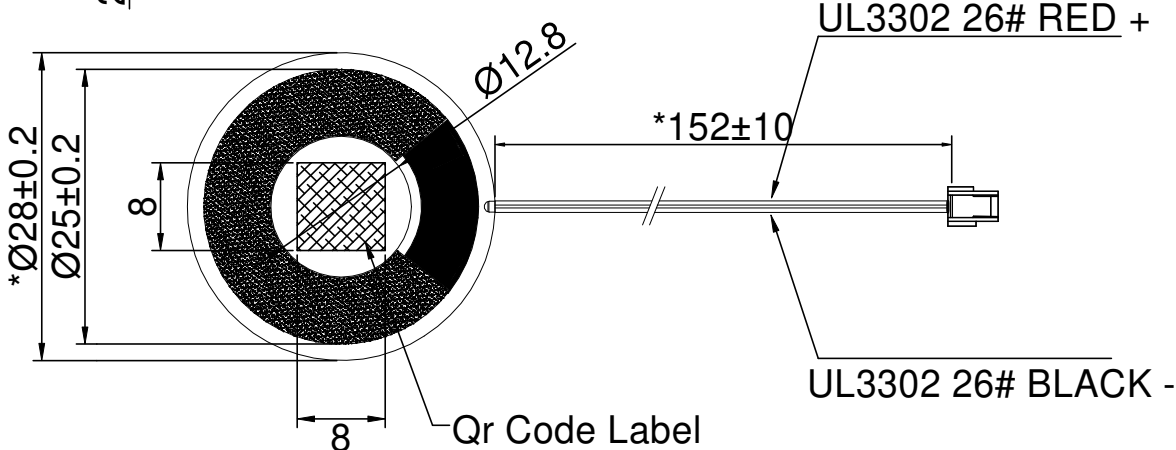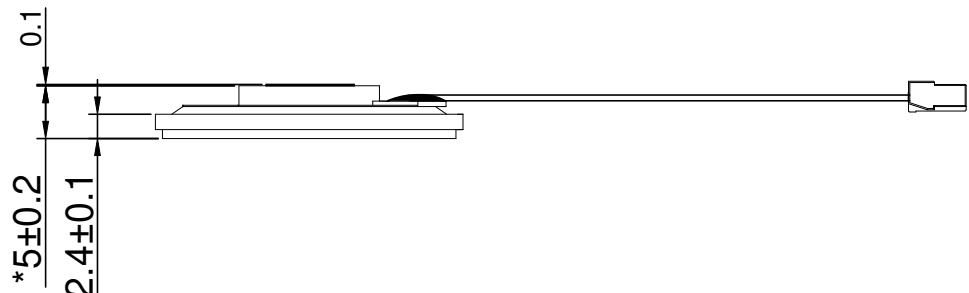


Qr Code Information: BE*****
Year Week Day Serial number

This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2020.03.25	BMS28-12B-08H05CW152M	
				Drawn by:	任江凤		
A3	2020.03.25	任江凤		Checked by:	杨紫群	Speaker	
Rev.	Date	Drawn	Note	Approved by:	张勇磊		
BESTAR Holdings Co., Ltd						DRG NO: BS/TES01.1822A3	Page:05 of 09
http://www.be-star.com info@be-star.com							

BMS28-12B-08H05CW152M

3. Bill of Material

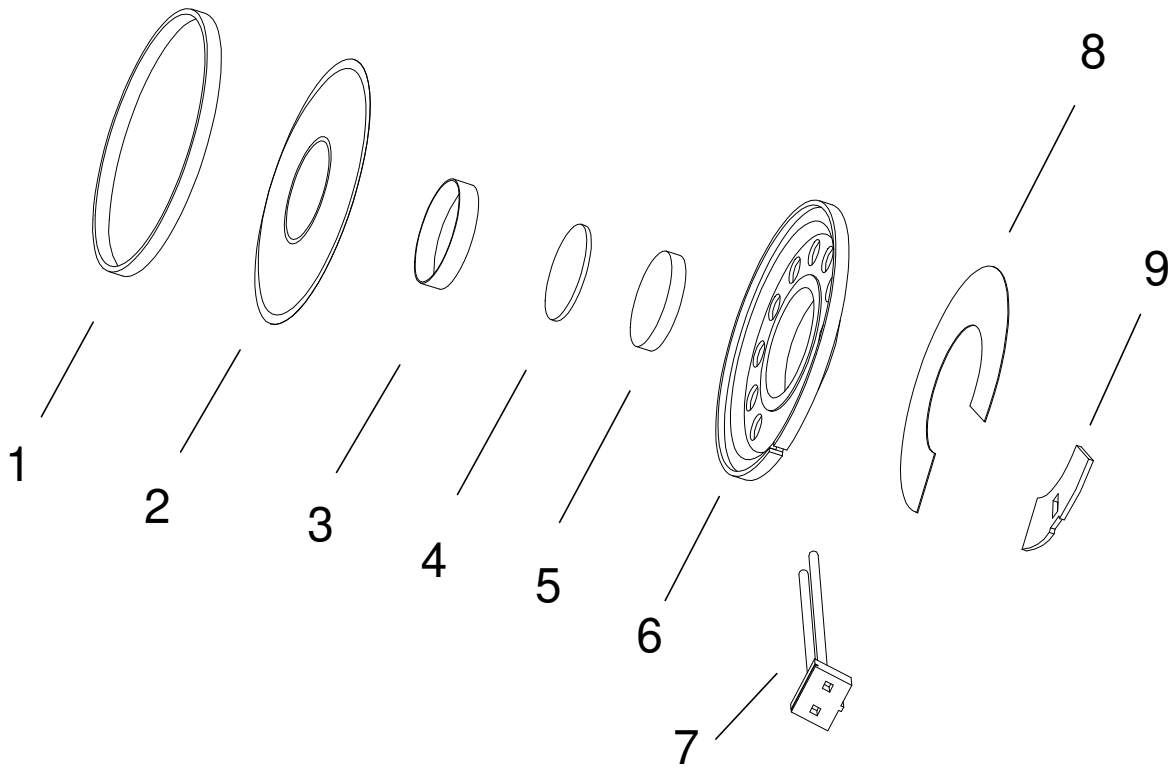

9	PCB	Epoxy and Cu(plating Sn)
8	Mesh	Cloth
7	Plug wire	Cu and PVC
6	Frame	SPCC
5	Magnet	NdFeB
4	Plate	SPCC
3	Voice coil	Cu
2	Diaphragm	PEN
1	Gasket	ABS
No	Parts Name	Material

Date: 2020.03.25

Drawn by: 任江凤

Checked by: 杨紫群

Approved by: 张勇磊

BMS28-12B-08H05CW152M

Speaker

BESTAR Holdings Co., Ltd

<http://www.be-star.com> info@be-star.com

DRG NO: BS/TES01.1822A3


Page:06 of 09

This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content

BMS28-12B-08H05CW152M

4. Reliability Test

- 3.1 Load Test
 - Power 0.8W White noise
 - Duration 96hrs
- 3.2 High Temperature Test
 - Temperature $+85\pm 3^{\circ}\text{C}$
 - Duration 96hrs
- 3.3 Low Temperature Test
 - Temperature $-40\pm 3^{\circ}\text{C}$
 - Duration 96hrs
- 3.4 Damp Heat
 - Temperature $40\pm 3^{\circ}\text{C}$
 - Relative Humidity 90%-95%RH
 - Duration 96hrs
- 3.5 Temperature Cycle Test
 - Cycle 5
 - 0.8W, F0~3500Hz, White noise



- 3.6 Drop Test
 - Height 75cm (in state of packing)
 - Times 10 (Drop onto hardwood board)
- 3.7 Vibration Test
 - 10 ~ 55 ~ 10Hz sin-wave sweep 15min. 5G (constant) X,Y,Z 3 directions 32 hours each, total 96 hours, 0.8W, F0~3500Hz, White noise
- 3.8 Lead wire pull strength
 - 3.0N for 30 sec. Horizontal, 2.0N 30 sec. vertical

Notice




1. Immediately after reliability test, the samples shall be stored under typical ambient laboratory climate conditions unless otherwise noted for 4 hours prior to performing verification testing.
2. After reliability test, all samples must meet all specified requirements
3. Sensitivity differences at F0 ~ 5.0Khz must be within +/-3 of initial values.

				Date:	2020.03.25	BMS28-12B-08H05CW152M	
				Drawn by:	任江凤		
A3	2020.03.25	任江凤		Checked by:	杨紫群	Speaker	
Rev.	Date	Drawn	Note	Approved by:	张勇磊		
BESTAR Holdings Co., Ltd						DRG NO: BS/TES01.1822A3	Page:07 of 09
http://www.be-star.com info@be-star.com							

This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content

BMS28-12B-08H05CW152M

5. Packing

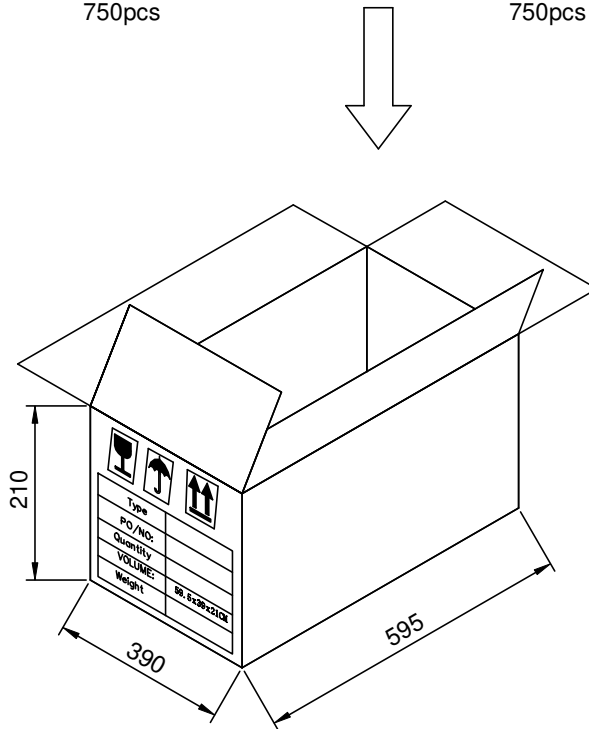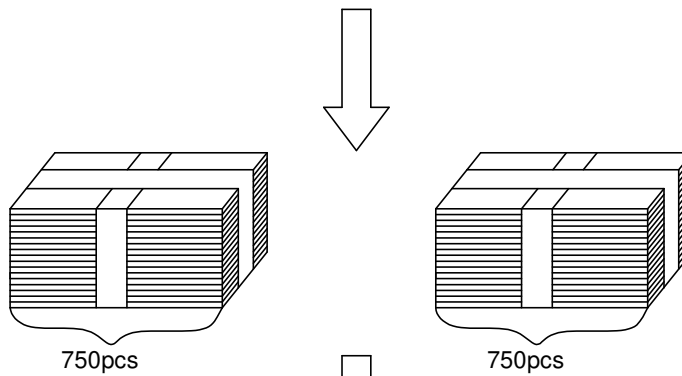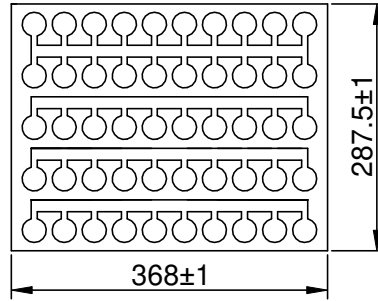

Remark:
 50 pcs per carton
 30 carton per box
 Total 1500pcs per box
 Size: 60×39×21(cm)

This print and information there in are proprietary to BESTAR Holdings Co., Ltd. and shall not be used in whole or in part without its written content

				Date:	2020.03.25	BMS28-12B-08H05CW152M
				Drawn by:	任江凤	
A3	2020.03.25	任江凤		Checked by:	杨紫群	Speaker
Rev.	Date	Drawn	Note	Approved by:	张勇磊	
BESTAR Holdings Co., Ltd						DRG NO: BS/TES01.1822A3
http://www.be-star.com info@be-star.com						Page:08 of 09

