LEAD–FREE P/N	DIM T	DIM A	REMARK
88980–001LF	2.00	9.80	magnetic
88980–002LF	2.50	10.30	magnetic
88980–003LF	3.00	10.80	magnetic
88980–004LF	3.50	11.30	magnetic
88980–005LF	2.50	10.30	non–magnetic

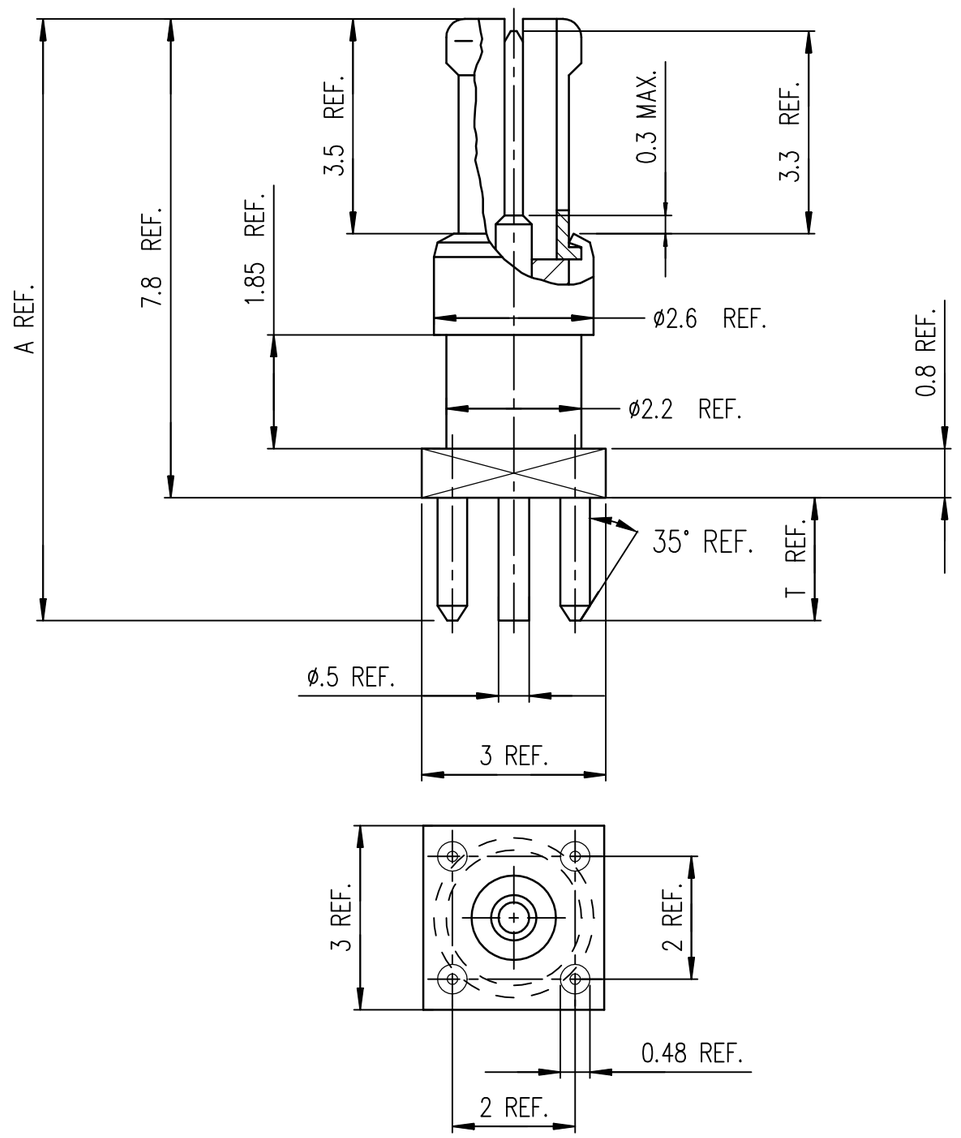

NOTES: RoHS information

1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS–22–008.
2. SOLDER PROCESS : +250°C max during 10 seconds.
3. PACKAGING SPEC: SEE GS–14–920

mat'l. code				surface ISO 1302		tolerance ISO 406 ISO 1101		projection	product family METRAL		
ltr	ecn no	dr	date	tolerances unless otherwise specified					title STR STB HDR MINICOAX INSERT		
L	ELX–I–25112	SAL	2016–10–11	angles	linear	.0±.x		mm			
				0°±x°		.00±.0x		scale 1:1			
						.000±.00x					
				dr	ANDREWS		1992–04–24		dwg no 88980	sheet 1 of 1	size A3
				engr	GOISNARD		1992–04–24	Amphenol FCi			
				chr	S ALOSIUS		2016–10–11				
				appd	BIJU K PAUL		2016–10–11		type Product Customer Drawing		
sheet index	revision	L									
	sheet	1									

© 2016 AFCI