
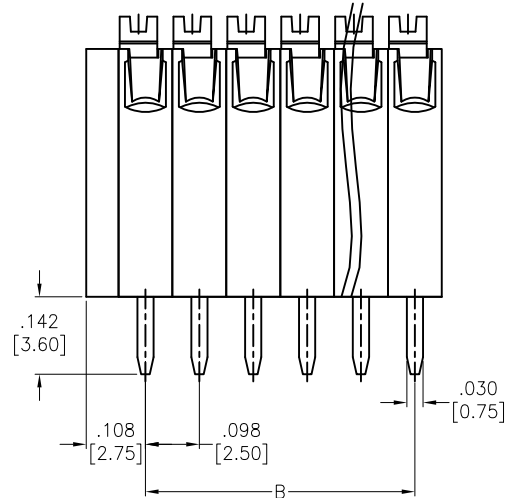
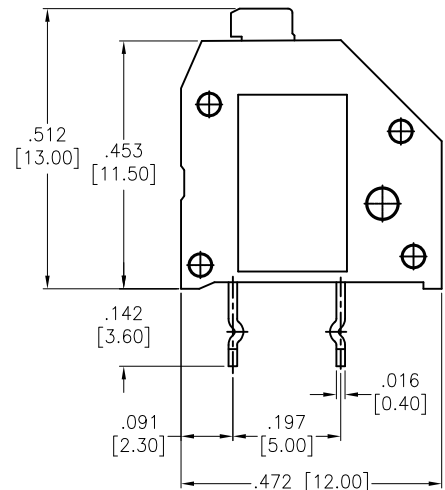
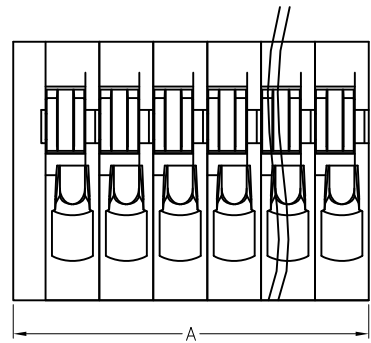


6	5	4	3	2	1
APPROVED: _____			Rev	AWO #	Description
DATE: _____ TITLE: _____			-		RELEASED
			A		UPDATE DRAWING
					Date
					7/6/16
					Appr
					AY/KC

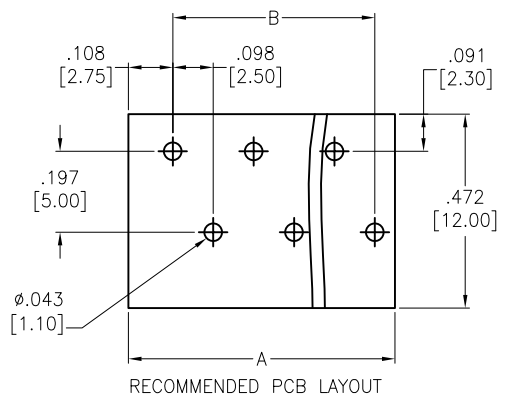

Positions: 01 thru 30
 A = .098 [2.50] x No. of Positions + .059 [1.50]
 B = .098 [2.50] x No. of Space

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Grey
 Contact: Copper Alloy, Tin plated
 Electrical:
 Voltage rating: 300V
 Current rating: 4A
 Dielectric withstanding voltage: 1600V for 1 minute
 Mechanical:
 Wire range: 28~20 AWG
 Strip length: 8.5-9.5 mm
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	AY	7/6/16	
CHECKED	YC	7/6/16	
APPROVED			

		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE EURO BLOCK, .098 [2.50] PITCH, WITH END COVER DOUBLE ROW CENTER CONTACT LINK	
SIZE	PART NO.	REV.	
X	EB59A-XX-V	A	
REF:	S00067C	SCALE:	NTS
		SHEET 1 OF 1	